



**MCR  
SAFETY**

**9696  
UltraTech  
Dipped  
Specification Sheet**

**PRODUCT DESCRIPTION:**

UltraTech® provides Ultra comfort, Ultra fit, and Ultra protection! The seamless nylon shell offers outstanding breathability and comfort while the Polyurethane palm and finger coating provides grip, puncture resistance, abrasion resistance and dexterity. Great for small parts handling. The 9696 features a 13 gauge gray nylon shell and gray polyurethane coating on the palm and fingertips. (Vending Packaged option available - VP9696).

**FEATURES:**

- Great tactile sensitivity
- Excellent comfort and fit
- Excellent grip
- Greater dexterity
- Abrasion resistance

**APPLICATIONS:**

Aerospace, Assembly Line Production, Automotive Assembly, Carpentry, Janitorial, Landscaping



**TECHNICAL DATA FOR: 9696**

<b>Series</b>	UltraTech	<b>EN 388 : CE Score - Abrasion</b>	4
<b>Material Group</b>	Strings	<b>EN 388 : CE Score - Cut</b>	1
<b>Product Type</b>	Dipped	<b>EN 388 : CE Score - Tear</b>	3
<b>Glove Size</b>	Large	<b>EN 388 : CE Score - Puncture</b>	1
<b>Gauge</b>	13 Gauge		
<b>Material</b>	Nylon		
<b>Made In</b>	Sri Lanka		

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA


Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: [www.mcrcsafety.com](http://www.mcrcsafety.com)

©2019 MCR Safety - All Rights Reserved



**MCR**  
SAFETY

**9696**  
**UltraTech**  
**Dipped**  
**Specification Sheet**

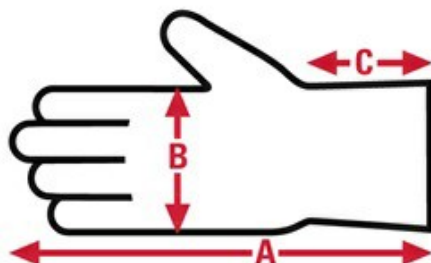

Item No:	Size:	A:	B:	C:	Case Weight	UOM Weight
9696XXL	XX - Large	13.504	4.173	2.874	14.028 lb.	1.169
9696XS	X - Small	11.535	3.425	2.677	10.956 lb.	0.913
9696XL	X - Large	13.072	4.134	2.835	13.692 lb.	1.141
9696L	Large	12.637	4.094	2.795	12.504 lb.	1.042
9696S	Small	11.811	3.543	2.677	11.472 lb.	0.956
9696M	Medium	12.205	3.740	2.756	12.216 lb.	1.018

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA

Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: [www.mcrcsafety.com](http://www.mcrcsafety.com)

©2019 MCR Safety - All Rights Reserved