


# VALVES/ MUFFLERS/ FILTERS

## PNEUMATICS

### STAINLESS SPEED CONTROL VALVE

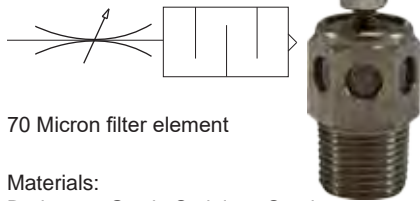


70 Micron filter element

Materials:  
Body: 303 Grade Stainless Steel  
Element: 316 Grade Stainless Steel  
Max Operating Pressure: 300PSI  
Temperature: 35° to 392°F

PART #	SIZE
940810	1/8"
940811	1/4"
940812	3/8"
940813	1/2"
940814	3/4"
940815	1"

### MUFFLER W/ FLOW ADJUSTMENT

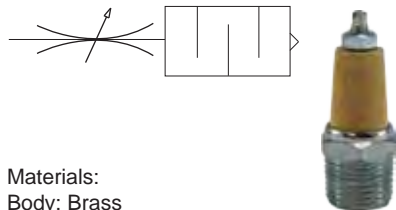

Materials:  
Body: Brass  
Element: Sintered Bronze  
Max Operating Pressure: 300PSI  
Temperature: 35° to 300°F

PART #	SIZE
28379	1/8"
28380	1/4"
28381	3/8"
28382	1/2"

### HIGH FLOW ALUMINUM MUFFLER


• hole pattern



Materials:  
Body: Aluminum  
Element: 50 Mesh Stainless Steel  
Max Operating Pressure: 300PSI  
Temperature: 35° to 160°F

PART #	SIZE
940822	1/8"
940823	1/4"
940824	3/8"
940825	1/2"
940826	3/4"
940827	1"


### HIGH FLOW STEEL MUFFLER

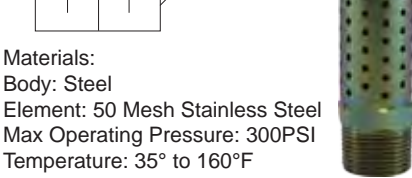

Materials:  
Body: Steel  
Element: 50 Mesh Stainless Steel  
Max Operating Pressure: 300PSI  
Temperature: 35° to 160°F

PART #	SIZE
28373	1/8"
28374	1/4"
28375	3/8"
28376	1/2"
28377	3/4"
28378	1"

### ALUMINUM HIGH FLOW MUFFLER

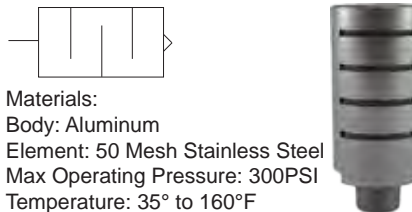

Materials:  
Body: Aluminum  
Element: 50 Mesh Stainless Steel  
Max Operating Pressure: 300PSI  
Temperature: 35° to 160°F

- Slit pattern
- Application: Used exhaust ports of Pneumatic valves or manifolds to reduce work area noise
- Construction: Aluminum body, 50 mesh self cleaning stainless steel screen corrosion resistant aluminum shell
- High flow & minimal back pressure

PART #	SIZE
28367	1/8"
28368	1/4"
28369	3/8"
28370	1/2"
28371	3/4"
28372	1"

### PLASTIC HIGH FLOW MUFFLER



Materials:  
Body: Black Nylon  
Element: 50 Mesh Stainless Steel  
Max Operating Pressure: 150PSI  
Temperature: 35° to 120°F

PART #	SIZE
28363	1/8"
28364	1/4"
28365	3/8"
28366	1/2"


### NIPPLE INLINE FILTER



Materials:  
Body: Brass  
Element: 40 Micron Sintered Bronze  
Max Operating Pressure: 300PSI  
Temperature: 35° to 300°F

PART #	SIZE
940845	1/8"
940846	1/4"
940847	3/8"
940848	1/2"

### REPAIRABLE AIR/ OIL INLINE FILTER

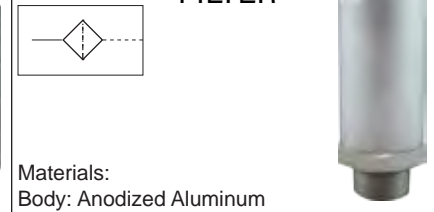

Materials:  
Body: Anodized Aluminum  
Element: 40 Micron Sintered Bronze  
Max Operating Pressure: 300PSI  
Temperature: 35° to 200°F

- Application: Protect small air tools i.e. impact wrench grinders, screwdrivers and low pressure hydraulic applications
- Construction: All anodized, lightweight aluminum housing
- Can be installed directly before the air tool
- Features cleanable or replaceable 40 micron filter element

PART #	SIZE
940840	1/8"
940841	1/4"
940842	3/8"
940843	1/2"
940844	3/4"

What you feel inside reflects on your face. So be happy and positive all the time.

- Sridevi

**WARNING:** This product can expose you to chemicals, including Chromium, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)