

OMSSL-LED-102

Motion Activated LED Security Light

30W 3-Head Sensor Floodlight

Catalog Number:

Project Name:

Note:

Type:



APPLICATIONS:

The Oracle LED motion Security lighting is now just a motion away. Providing increased safety, security, and peace of mind, it can be easily installed quickly and safely. It saves additional energy by utilizing the dusk-to-dawn feature, supplying full light protection when motion is detected.


FEATURES:

- Three adjustable light heads, flexible and cover a wide area
- Precision die-cast aluminum housing
- 360° rotation lens hood
- Low power consumption, equivalent to 120W halogen light
- Motion activated and manual on-off override
- Adjustable detection range and time settings
- Up to 180° wide sensor angle and range up to 70 feet detection distance
- Easy and fast installation



SPECIFICATIONS: LUMENS

WATTAGE	2700 lumens
CCT	30W
CRI	30K, 40K, 50K
COLOR CONSISTENCY LIGHT	80
EFFICIENCY	7-step MacAdam Ellipse binning
BEAM ANGLE	90 lumens/watt
VOLTAGE	100°
POWER FREQUENCY	120V
DETECTION RANGE	50/60 Hz
DETECTION DISTANCE TIME	150°, 180°
SETTING APPLICABLE	Max. 70 ft (adjustable)
ENVIRONMENT WORKING	From 10 sec to 5 min
TEMPERATURE	Dry/Damp/Wet location 14°F - 104°F

DIMENSION:

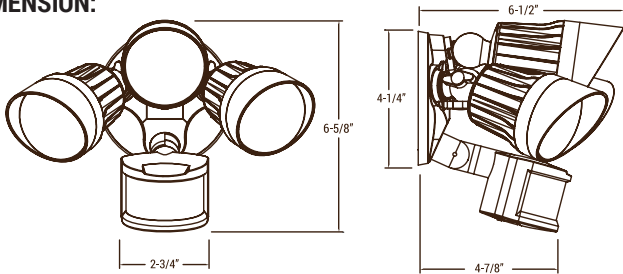

PHOTOMETRICS:

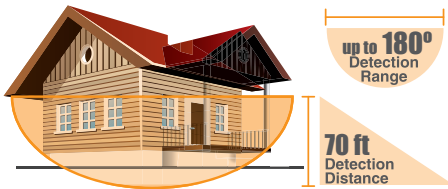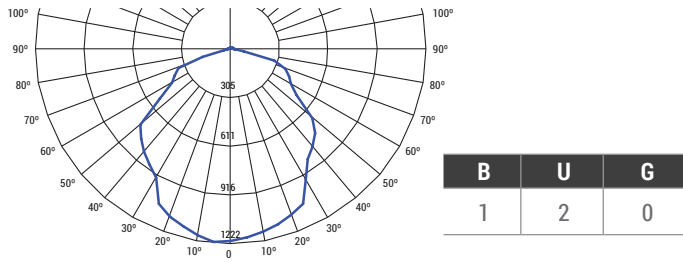

Ordering Guide > Example: **OMSSL-LED-102-2700L-120-30K-150-WH**

OMSSL-LED-102					
SERIES	PERFORMANCE	VOLTAGE	CCT	DETECTION RANGE	FINISH
OMSSL-LED-102	2700L - 900 lumens/head	120 - 120V	30K - 3000K 40K - 4000K 50K - 5000K	150 - 150° angle 180 - 180° angle	WH - White BZ - Bronze



Submittal form is available @ www.oraclelighting.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions subject to change without notice.

Issued-B1118-Rev. 1