

Insulating Bushings

For Threaded for Rigid Conduit & IMC

Type IB

Feature:

- Temperature rating 105°C

Material:

Polypropylene (gray)

Third Party Certification:

 UL Listed: E-11853

 CSA Certified: 057250


Applicable Third Party Standards:

UL Standard: 514B

CSA Standard: C22.2 No. 18

Fed. Spec: W-F-408E

| Trade Size (inches) | Catalog Number | Dimensions in Inches | |
|------------------------|-------------------|----------------------|-------------|
| | | Max. Dia. | Max. Height |
| 1/2 | IB-50 | 1 1/16 | 3/8 |
| 3/4 | IB-75 | 1 7/16 | 7/16 |
| 1 | IB-100 | 1 9/16 | 9/16 |
| 1 1/4 | IB-125 | 2 | 5/8 |
| 1 1/2 | IB-150 | 2 1/4 | 5/8 |
| 2 | IB-200 | 2 7/8 | 5/8 |
| 2 1/2 | IB-250 | 3 3/8 | 3/4 |
| 3 | IB-300 | 4 1/16 | 3/4 |
| 3 1/2 | IB-350 | 4 3/8 | 7/8 |
| 4 | IB-400 | 5 1/8 | 7/8 |
| 5 | IB-500 | 6 7/16 | 1 |
| 6 | IB-600 | 7 7/16 | 1 |

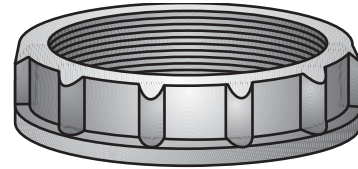

**Type IB
Threaded**

Type PPC

Use:

To plug bushings, rigid conduit and IMC.

Features:

- Suitable for use on the following bushings: Type A, B, IBC, BB, IB, BLG, HB, HBLG and Type 2-series.


Material:

Polyethylene

Applicable Third Party Standards:

UL Listing not applicable

| Trade Size (inches) | Catalog Number | Dimensions in Inches | |
|------------------------|-------------------|----------------------|-------------|
| | | Max. Dia. | Max. Height |
| 1/2 | PPC-50 | 1 | 9/16 |
| 3/4 | PPC-75 | 1 3/16 | 5/8 |
| 1 | PPC-100 | 1 1/16 | 3/4 |
| 1 1/4 | PPC-125 | 1 7/8 | 3/4 |
| 1 1/2 | PPC-150 | 2 | 3/4 |
| 2 | PPC-200 | 2 1/2 | 3/4 |
| 2 1/2 | PPC-250 | 2 7/8 | 1 1/8 |
| 3 | PPC-300 | 3 3/8 | 7/8 |
| 3 1/2 | PPC-350 | 4 | 1 1/4 |
| 4 | PPC-400 | 4 3/8 | 7/8 |



Type PPC