






# Hose visual index

A

<p><b>Constant Working Pressure Hose</b></p>	<p>451TC A-10              Tough Cover – SAE 100R17</p>	<p>451ST A-10              Super Tough - SAE 100R17</p>	<p>451TC A-11              Hydraulic Twin Tough</p>
<p>711 A-12              SAE J1942</p>	<p>351TC A-13              Tough Cover            4,000 psi Constant W.P.</p>	<p>351ST A-13              Super Tough            4,000 psi Constant W.P.</p>	<p>722TC A-14              Tough Cover            4,000 psi Constant W.P.</p>
<p>772TC A-15              Tough Cover - SAE 100R12</p>	<p>772ST A-15              Super Tough - SAE 100R12</p>	<p>721 A-16              SAE 100R12</p>	<p>721TC A-16              Extreme Tough Cover            SAE 100R12</p>
<p>721ST A-17              Super Tough - SAE 100R12</p>	<p>787TC A-18              Compact Spiral™ Hose</p>	<p>781 A-20              SAE 100R13</p>	<p>P35 A-20              SAE 100R13</p>
<p>782TC A-21              Tough Cover            SAE 100R13</p>	<p>782ST A-21              Super Tough            SAE 100R13</p>	<p>797TC A-22              Compact Spiral™ Hose</p>	<p>791TC A-24              Extreme Tough Cover            SAE 100R15</p>
<p>792TC A-24              Tough Cover - SAE 100R15</p>	<p>761 A-25              ParMax - 8,000 psi</p>		
<p><b>Hydraulic – Industry Standard Hose</b></p>	<p>JK A-25              Jack Hose</p>	<p>422 A-26              Worldwide            ISO 1436-1 TYPE 1SN</p>	<p>482TC A-27              Tough Cover            SAE 100R1 TYPE AT</p>
<p>482ST A-27              Super Tough            SAE 100R1 TYPE AT</p>	<p>426 A-28              High-Temperature            SAE 100R1 TYPE AT</p>	<p>302 A-29              Worldwide            ISO 1436-1 TYPE 2 SN</p>	<p>431 A-30              Compact - SAE 100R16</p>
<p>436 A-31              SAE J1942</p>	<p>471TC A-32              Tough Cover            ISO 11237-1 TYPE 2 SC</p>	<p>471ST A-32              Super Tough            ISO 11237-1 TYPE 2 SC</p>	<p>471TC A-33              Hydraulic Twin Tough</p>
<p>472TC A-33              Tough Cover            Two-Wire Braid</p>	<p>AX A-34              One-Wire Braid</p>	<p>BXX A-34              SAE 100R2 TYPE AT</p>	<p>701 A-35              ISO 3862-1 TYPE 4SP</p>
<p>731 A-35              ISO 3862-1 TYPE 4SH</p>			

## Catalog Sections

- Hose Section
- Accessories Section
- Fittings Section
- Technical Section
- Equipment Section

## Parker Hose Nomenclature

Example: 451TC-8  
**451**TC-8 - Hose Type  
 451**TC**-8 - Indicates the special feature of the hose (in this case, 'Tough Cover')  
 451TC-**8** - Hose inside diameter dash size (in this case, 8/16" or 1/2")

### Hose Information

- Base part number
- Description
- SAE, ISO, and EN specifications

### Hose Inner Diameter

Measured in 1/16 inch increments identified by use of a "dash"(-) numbering system. i.e., 4/16" = 1/4" = -4.

### Hose Outer Diameter

A critical measurement when considering hose clamps and applications where envelope size is limited.

### Hose Working Pressure

Should have a working pressure rating meeting or exceeding the maximum operating pressure of the system. The maximum rating is listed below for where the hose is to be used.

Visually shows **hose construction**.

**482TC**  
 Hydraulic - Tough Cover  
 SAE 100R1 TYPE AT, J1942 / ISO 1436-1 TYPE 1SN / EN853 TYPE 1SN / USCG H

**482ST**  
 Hydraulic - Super Tough Cover  
 SAE 100R1 TYPE AT / ISO 1436-1 TYPE 1SN / EN853 TYPE 1SN

# Part Number	Hose I.D.		Hose O.D.		Working Pressure		Minimum Bend Radius		Weight		Field Attachable	
	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/m	43 Series	42 Series
482TC/ST-4	1/4	6,3	0.53	14	3250	22,7	2	50	0.16	0,24	•	•
482TC-5	5/16	8	0.59	15	3250	22,7	2-1/4	55	0.18	0,27	•	•
482TC/ST-6	3/8	10	0.69	17	3000	21,0	2-1/2	65	0.23	0,34	•	•
482TC/ST-8	1/2	12,5	0.82	21	2500	17,5	3-1/2	90	0.29	0,43	•	•
482TC/ST-10	5/8	16	0.94	24	2000	14,0	4	100	0.33	0,49	•	•
482TC/ST-12	3/4	19	1.09	28	1750	12,2	4-3/4	120	0.42	0,63	•	•
482TC/ST-16	1	25	1.41	36	1275	8,8	6	150	0.63	0,94	•	•

**Application:** Petroleum base hydraulic fluids and lubricating oils.  
**Inner Tube:** Synthetic rubber.  
**Reinforcement:** One braid steel wire.  
**Cover:** Synthetic rubber abrasion resistant, MSHA accepted.  
**Temperature Range:** -40°F to +212°F (-40°C to +100°C).  
**Fittings:** 43 Series - pg. B-00, 42 Series - pg. B-00.

• Field Attachable Assembly Instructions are in Section B with each Fittings Series.  
 • See Section C for Parkrimp Assembly Instructions.  
 • Temperature Range of other media listed in Section E.

A-27

For more information regarding hose application and temperature, see the Technical Section.

### Minimum Bend Radius

Is the smallest arc that the hose can be bent before its life is greatly reduced. Exceeding the bend radius can cause kinking, inner tube washout and excessive stress on reinforcement.

### Weight

Provided by the foot for instances where it is a critical parameter in the design of the system.

### Approved Fitting

To be used with the hose. Could be crimped or field attachable.


HYDRAULIC

302



Parker's 302 hose, a universal two-wire construction hose designed to accommodate global customer requirements, is manufactured to strict international quality specifications. Parker's 302 offers customers consistency of performance combined with continuous availability anywhere in the world. It offers a high working pressure, long service life and a wide fluid compatibility.

- Universal two-wire hose design manufactured to international specifications (ISO 1436-1 Type 2SN)
- Increased working pressures for improved reliability and expanded applications
- Synthetic rubber inner tube for greater fluid compatibility and bio-oil resistance

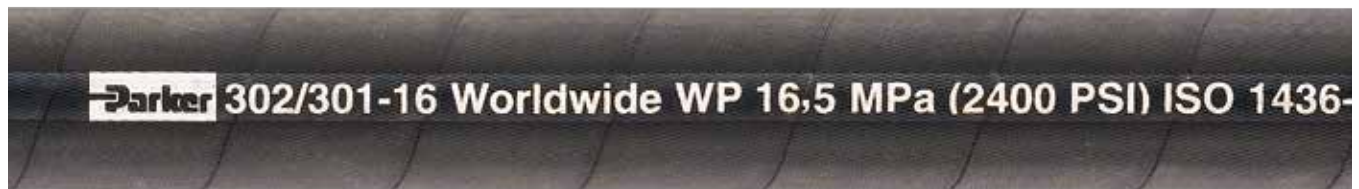

302 Hydraulic Worldwide

ISO 1436-1 TYPE 2SN / SAE 100R2 TYPE AT, J1942 / EN 853 TYPE 2SN / USCG HF / DNV / ABS / BV



**Application:** Petroleum base hydraulic fluids and lubricating oils.  
**Inner Tube:** Synthetic rubber.  
**Reinforcement:** Two braids steel wire.  
**Cover:** Synthetic rubber.  
**Temperature Range:** -40°F to +212°F (-40°C to +100°C).  
**Fittings:** 43 Series - pg. B-27. 30 Series - pg. B-167.

# Part Number	Hose ID		Hose O.D.		Working Pressure		Minimum Bend Radius		Weight		Parkrimp 43 Series	Field Attachable 30 Series
	inch	mm	inch	mm	psi	Mpa	inch	mm	lbs/ft	kg/m		
302-4	1/4	6,3	0.59	15,0	5800	40	4	100	0.26	0,39	•	•
302-5	5/16	8	0.65	16,6	5000	35	4-1/2	115	0.28	0,42	•	•
302-6	3/8	10	0.75	19,0	4750	33	5	130	0.37	0,55	•	•
302-8	1/2	12,5	0.88	22,3	4000	28	7	180	0.45	0,67	•	•
302-10	5/8	16	1.00	25,5	3600	25	8	200	0.52	0,77	•	•
302-12	3/4	19	1.16	29,4	3100	21,5	9-1/2	240	0.67	1,00	•	•
302-16	1	25	1.50	38,1	2400	16,5	12	300	1.00	1,49	•	•
302-20	1-1/4	31,5	1.86	47,1	1800	12,5	16-1/2	420	1.16	1,73	•	•
302-24	1-1/2	38	2.14	54,5	1300	9	20	500	1.44	2,14	•	•
302-32	2	51	2.64	67,2	1150	8	25	630	1.99	2,96	•	•

- Field Attachable Assembly Instructions are in Section B with each Fittings Series.
- See Section C for Parkrimp Assembly Instructions.
- Temperature Range of other media listed in Section E.