

SmartMate

SMARTMATE ELE BAL (2) 13W CFL (4-PIN) 120-277V KIT

Offering maximum versatility, the Philips Advance family of SmartMate ballasts for 4-pin compact fluorescent lamps drive a broad range of quad and triple-tube, circline, 2D, and long twin-tube lamps. SmartMate ballasts' energy efficient design, compact and lightweight housing, and user-friendly features make these ballasts an ideal choice for fixture manufacturers, retrofitters, and MRO replacement.

Product data

General Characteristics

Lamp Type	CFQ13W/G24Q
Number of Lamps	1/2 piece
Input Voltage	120-277 V
Line Frequency	50/60 Hz
Ballast Type	Electronic Fluorescent
Base Model	ICF2S13H1LD
Housing	H1
Housing Dimensions	4.98" x 2.4" x 0.98"
Housing Material	Metal/Plastic
Suitable for Outdoor use?	Yes
Starting Method Family Name	Programmed Start SmartMate

• Operating Characteristics

Automatic restart	Yes
Ignition time	1.5 s
Input Power Gear	29-29 W
Ballast factor	1 -
Ballast Efficacy Factor	3.45 -
Power Factor	0.98
Lamp Current Crest	1.5 -
Factor	
Sound Rating	А
Max THD	10 %

• Wiring Characteristics

Color input terminals Color output termi- nals	BLK & WHT RED, YEL & BLU			
Connector type	Poke-In			
Wire Striplength	0.375mm			
Lamp Connection	Series			
Wire Gauge	18AWG			

Wire Length by	No wires
Color	
Wire Type	Solid
Allowed Wiring	Yes
Config(Remote)	
Allowed Wiring	Yes
Config(Tandem)	
Allowed Wiring	Yes
Config(Through)	
Max Dist. Ball to	1-L = 15' / 2-L =
Lamp(Remote)	
Max Dist. Ball to	2-L: Red = 6'
Lamp(Tandem)	
Max Dist.Ball to	2-L: Red = 6'
Lamp(Through)	

• System Chars on driver level

Rated Lamp	Watts	13W
------------	-------	-----

• Temperature Characteristics

T-case maximum	75 C
----------------	------

• Product Dimensions

Length A1	4.60 in
Length A2	4.20 in
Length A3	2.00 in
Width B1	3.00 in
Height C1	1.29 in

• Approval & Application Chars

EMC Immunity Approbation Marks UL Listed FCC Non-Consumer UL, CSA, RoHS Yes

6'




SmartMate

• Product Data

Product number Full product name	ICF2S13H1LDK ELE BAL (2) 13W CFL (4-PIN) 120-277V KIT
Short product name	ELE BAL (2) 13W CFL (4-PIN) 120-277V KIT
Pieces per Sku	1
eop_pck_cfg	12
Skus/Case	12
Bar code on pack	781087102916
Bar code on case	30781087117751
Logistics code(s)	913700500811
eop_net_weight_pp	0.250 kg

Dimensional drawing

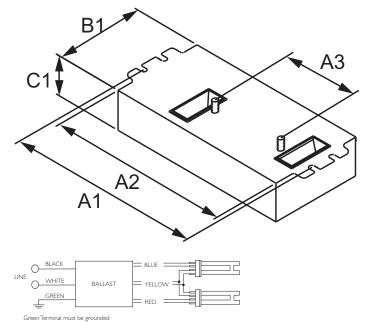

SMARTMATE ELE BAL (2) 13W CFL (4-PIN) 120-277V KIT

Product	A1 (Norm)	A2 (Norm)	A3 (Norm)	B1 (Norm)	C1 (Norm)
ELE BAL (2) 13W CFL (4-PIN)	4.60	4.20	2.00	3.00	1.29
120-277V KIT					



 $\ensuremath{\mathbb{C}}$ 2015 Koninklijke Philips N.V. (Royal Philips) All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting