



# AmbiStar

## AMBISTAR ELE BALLAST (2) F40T12 120V

Ambistar electronic ballasts are an easy-to-install, energy-efficient replacement solution for optimizing residential and hospitality lighting.


### Product data

General Information		Color Output Terminals	
Lamp Type	F40T12		No terminals
Number of Lamps	1/2 piece/unit	Wire Striplength	0.50/0.375 mm
Ballast Type	Electronic Fluorescent	Lamp Connection	Series
Base Model	RELB2S40N	Wire Length By Color	See data sheet
Suitable For Outdoor Use	Yes	Wire Gauge (Nom)	18AWG mm
Automatic Restart	Yes	Wire Type	Solid
Remote Wiring Configuration Allowed		Yes	
Tandem Wiring Configuration Allowed		Yes	
Through Wiring Configuration Allowed		Yes	
Max Ballast-Lamp Distance Remote Wiring		20'	
Max Ballast-Lamp Distance Tandem Wiring		Red = 10'	
Max Ballast-Lamp Distance Through Wiring		Red = 10'	
Connector Type		No connector	
Operating and Electrical		Temperature	
Input Voltage	120 V	T-Case Maximum (Nom)	70 °C
Input Frequency	60 Hz	Mechanical and Housing	
Max THD	20 %	Housing Material	Metal
Power (Rated) (Nom)	40 W	Housing	N
Starting Method	Rapid Start	Housing Dimensions	9.5" x 1.3" x 1.0"
Lamp Current Crest Factor (Nom)	1.7	Approval and Application	
Ignition Time (Nom)	1 s	EMC Immunity Standard	FCC Consumer
Ballast Factor (Nom)	0.85		
Power Factor (Nom)	0.98		
Input Current (Operating) (Nom)	0.62 A		
Input Power (Nom)	72 W		
Rated Lamp Watts	40W W		
Wiring			
Color Input Terminals	No terminals		

Sound Rating	A
UL Recognized	No
<b>Product Data</b>	
Order product name	AMBISTAR RELB2S40N35I
EAN/UPC - Product	781087090428
Order code	RELB2S40N35I

Local order code	108662
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	913701218101
Net Weight (Piece)	331.000 g

Dimensional drawing

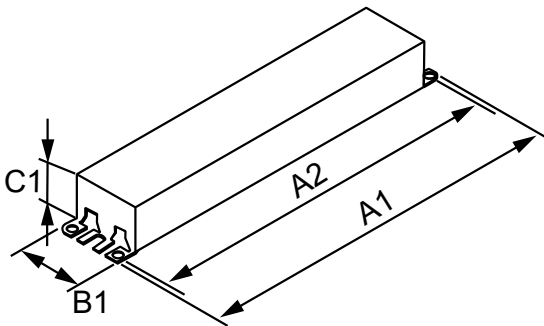

ELE BALLAST (2) F40T12 120V

Product	A1	A2	B1	C1
---------	----	----	----	----

