




LOCKING FLEX HEAD SPLINE WRENCH



FEATURES

- ▶ Black chrome finish is corrosion resistant and visually distinctive.
- ▶ Anti-Slip Design (ASD) open end.
- ▶ 72 tooth ratcheting mechanism rotates fast with only 5 degrees of swing.
- ▶ 15° angled offset helps keep shank clear of obstructions.
- ▶ Locking feature with push button release on a 180° flex head.
- ▶ Chrome-vanadium box ends and switch levers provide high strength and durability.
- ▶ Box end is countersunk for easy application to the fastener.
- ▶ Spline design was created for use with specialty spline bolts which are used when weight and size of bolt heads must be minimized.
- ▶ Spline design enables the wrench to contact conventional fasteners away from the corners, which applies force over a larger area, reducing risk of fastener scoring and helps prevent rounding of the corners and other fasteners damage that could lead to Foreign Object Damage (FOD).
- ▶ The high contact surface area which is away from fastener points enables turning of highly rounded fastener.
- ▶ Spline wrenches can be used on 4, 6, 12 point, spline and Torx® fasteners.

Torx® is a trademark of Acument Intellectual Properties, LLC

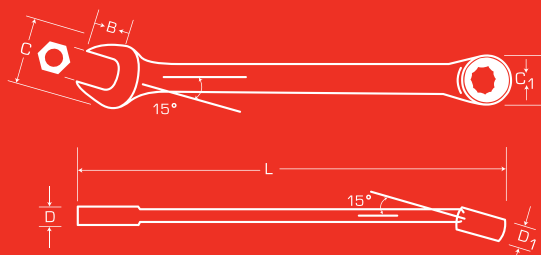

JSCV16F

LOCKING FLEX HEAD SPLINE WRENCHES

PRODUCT #	SIZE	OUTSIDE HEAD WIDTH (C)	OUTSIDE HEAD WIDTH (C1)	HEAD THICKNESS (D)	HEAD THICKNESS (D1)	OVERALL LENGTH	WEIGHT (LBS)
JSCV10F	5/16"	19/32"	41/64"	11/64"	17/64"	5"	0.16
JSCV12F	3/8"	13/16"	7/8"	13/64"	9/32"	5-3/8"	0.17
JSCV14F	7/16"	57/64"	27/32"	13/64"	5/16"	5-9/16"	0.19
JSCV16F	1/2"	1-1/16"	1-3/32"	1-15/64"	11/32"	6"	0.20
JSCV18F	9/16"	1-9/64"	1-1/16"	1/4"	23/64"	6-1/4"	0.29
JSCV20F	5/8"	1-5/16"	1-3/16"	19/64"	25/64"	7"	0.33
JSCV22F	11/16"	1-25/64"	13/32"	19/64"	1-7/32"	7-1/2"	0.46
JSCV24F	3/4"	1-35/64"	1-21/64"	11/32"	7/16"	8-1/2"	0.57
JSCVM08F	8 mm	41/64"	21/32"	5/32"	17/64"	5"	0.13
JSCVM09F	9 mm	47/64"	47/64"	3/32"	9/32"	5-13/64"	0.16
JSCVM10F	10 mm	13/16"	51/64"	13/64"	9/32"	5-3/8"	0.16
JSCVM11F	11 mm	57/64"	55/64"	13/64"	5/16"	5-1/2"	0.17
JSCVM12F	12 mm	63/64"	57/64"	15/64"	21/64"	5-25/32"	0.19
JSCVM13F	13 mm	1-1/16"	1"	15/64"	11/32"	6"	0.19
JSCVM14F	14 mm	1-9/64"	1-3/64"	17/64"	23/64"	6-1/2"	0.21
JSCVM15F	15 mm	1-3/16"	1-3/32"	1/4"	3/8"	6-3/4"	0.25
JSCVM16F	16 mm	1-21/64"	1-11/64"	5/16"	25/64"	7"	0.30
JSCVM17F	17 mm	1-25/64"	1-1/4"	19/64"	13/32"	7-1/2"	0.33
JSCVM18F	18 mm	1-15/32"	1-9/32"	21/64"	27/64"	8"	0.36
JSCVM19F	19 mm	1-35/64"	1-21/64"	11/32"	7/16"	8-1/2"	0.45



WARNING: WORK SAFELY WITH TOOLS. WEAR SAFETY GOGGLES.

©2014 Stanley Black & Decker, Inc. • 2195 East View Parkway, Suite 103, Conyers, GA 30013
1.800.800.TOOL • Fax: 1.770.648.9108 • protoindustrial.com



LOCKING FLEX HEAD SPLINE WRENCH



JSCVF-8S **8 PIECE LOCKING FLEX HEAD** **SPLINE WRENCH SET - SAE**

Size Range: 5/16" - 3/4"

JSCVMF-12S **12 PIECE LOCKING FLEX HEAD** **SPLINE WRENCH SET - METRIC**

Size Range: 8 mm - 19 mm



JSCVF-8S



JSCVMF-12S



WARNING: WORK SAFELY WITH TOOLS. WEAR SAFETY GOGGLES.

©2014 Stanley Black & Decker, Inc. • 2195 East View Parkway, Suite 103, Conyers, GA 30013
1.800.800.TOOL • Fax: 1.770.648.9108 • protoindustrial.com