



Steel Strand – Haven's™ Grips

Messenger and Guy Strand - 1604 Series

- Designed for use when light, compact grip is desired and where cable deformation is not a factor
- Gripping pressure of the knurled jaw is applied to 1/4" (6.35 mm) cable area
- Latch on Cat. No. 1604-20L helps hold cable in the jaw

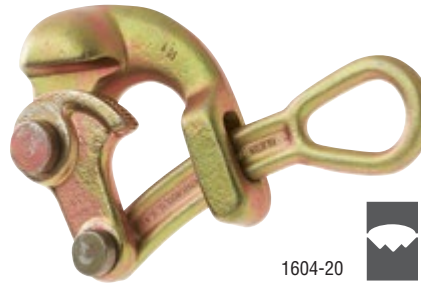

1604-20

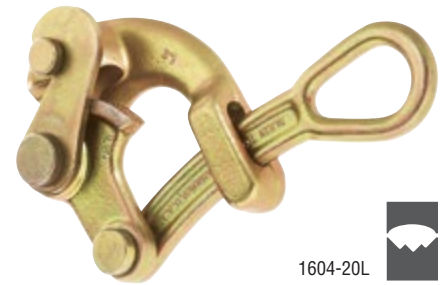

1604-20L



| Cat. No. | Latch Model | Cable Diameter | Weight |
|--|-------------|-------------------------------------|--------------------|
| 2,500 lbs. (1,134 kg) Maximum Safe Load | | | |
| 1604-10 | — | 0.06" to 0.25" (1.52 to 6.35 mm) | 4.0 lbs. (1.81 kg) |
| 5,000 lbs. (2,268 kg) Maximum Safe Load | | | |
| 1604-20 | 1604-20L | 0.125" to 0.500" (3.18 to 12.70 mm) | 2.1 lbs. (0.95 kg) |

Wire Rope-1625 Series

- Designed for use when light, compact grip is desired and where cable deformation is not a factor
- Gripping pressure of the knurled jaw is applied to 1/4" (6.35 mm) cable area
- All 1625 series have a swing latch to help hold cable in the jaw



1625-20



| Cat. No. | Cable Diameter | Weight |
|--|------------------------------------|--------------------|
| 8,000 lbs. (3,629 kg) Maximum Safe Load | | |
| 1625-20 | 0.28" to 0.75" (7.11 to 19.05 mm) | 4.0 lbs. (1.81 kg) |
| 162520-7/8 | 0.38" to 0.88" (9.65 to 22.35 mm) | 4.0 lbs. (1.81 kg) |
| 162520-1 | 0.50" to 1.00" (12.70 to 25.40 mm) | 4.0 lbs. (1.81 kg) |

Parallel Jaw Grips

Parallel Jaw Grip - Hendrix® Tree Wire

- Securely pulls HDPE-coated cable commonly known as "tree wire"
- Innovative high-traction surface grips the cable without damaging the outer jacket
- Tough carbide grit technology withstands even the harshest jobsite conditions
- The only grip solution specifically designed for Hendrix® Aerial Cable
- Spring-loaded for one-handed operation and easy placement on the conductor
- Hendrix® is a registered trademark of Marmon Utility LLC

NEW!



1716-60

| Cat. No. | Cable Diameter | Jaw Length | Weight |
|---|------------------------------------|-------------------|--------------------|
| 12,000 lbs. (5,443 kg) Maximum Safe Load | | | |
| 1716-60 NEW! | 0.70" to 1.30" (17.78 to 33.02 mm) | 5-1/8" (130.2 mm) | 8.1 lbs. (3.67 kg) |