

Color: Bronze

Weight: 9.5 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant	Watts	60/50/40/30W
120V	0.50A	Color Temp	3000/4000/5000K
208V	0.29A	Color Accuracy	82-85 CRI
240V	0.25A	L70 Lifespan	100,000 Hours
277V	0.22A	Lumens	3,727-9,105 lm
Input Watts	29.3-61W	Efficacy	117.1-161.5 lm/W

**Technical Specifications**

**Field Adjustability**

**Cutoff Adjustability:**

45°, 30°, 15° and 0° (factory default 45°)

**Field Adjustable:**

Field Adjustable Light Output:  
60W/50W/40W/30W (factory default 60W)  
Color temperature selectable 3000K, 4000K and 5000K (factory default 4000K)

**Compliance**

**UL Listed:**

Suitable for wet locations

**DLC Listed:**

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: S-TFCRVC

**Electrical**

**Driver:**

Constant Current, Class 1, 120-277V, 50/60 Hz:  
60W: 120V: 0.50A, 208V: 0.29A, 240V: 0.25A, 277V: 0.22A  
50W: 120V: 0.41A, 208V: 0.24A, 240V: 0.21A, 277V: 0.19  
40W: 120V: 0.34A, 208V: 0.20A, 240V: 0.18A, 277V: 0.15A  
30W: 120V: 0.25A, 208V: 0.15A, 240V: 0.13A, 277V: 0.11A

**Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

**Photocell:**

Integrated photocell included with on/off switch

**Surge Protection:**

DM 4KV+ CM 6KV

**Performance**

**Lifespan:**

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**Performance Data:**

[Click here for the W22-M-60 performance data](#)

**Wattage Equivalency:**

60W: Replaces up to 250W Metal Halide (MH) or 200W High Pressure Sodium (HPS)  
50W: Replaces up to 250W Metal Halide (MH) or 200W High Pressure Sodium (HPS)  
40W: Replaces up to 175W Metal Halide (MH) or 150W High Pressure Sodium (HPS)  
30W: Replaces up to 150W Metal Halide (MH) or 100W High Pressure Sodium (HPS)

**LED Characteristics**

**LEDs:**

Long-life, high-efficacy, surface-mount LEDs

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Construction**

**Housing:**

Die-cast aluminum

**Lens:**

Glass

**Reflector:**

Aluminum

## Technical Specifications (continued)

**Cold Weather Starting:**

The minimum starting temperature is -40°C (-40°F)

**Maximum Ambient Temperature:**

Suitable for use in up to 40°C (104°F)

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

**Finish:**

Formulated for high durability and long-lasting color

**Installation**

---

**Mounting:**

Surface mount for recessed junction box; 3 conduit entry points

**Optical**

---

**BUG Rating:**

60W: B2 U4 G5

50W: B2 U4 G4

40W: B1 U3 G4

30W: B1 U3 G3

**Other**

---


**5 Yr Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

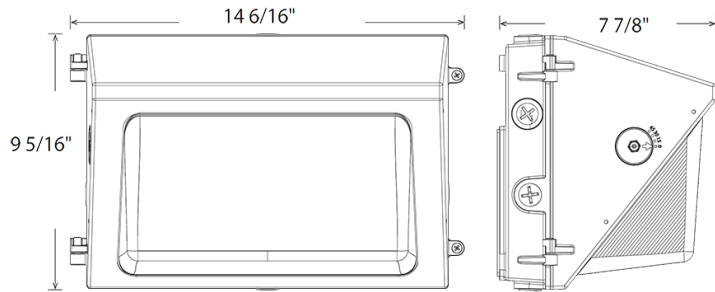

## Features

- 100,000-Hour LED lifespan
- 0-10V dimming standard
- 5-Year, limited warranty

## Ordering Matrix

Family	Housing Size	Wattage	Color Temp	Finish	Forward Throw	Driver	Options
W22	M	60					
	S = Small M = Medium L = Large	30 = 30/25/20/15W <sup>1</sup> 60 = 60/50/40/30W <sup>2</sup> 100 = 100/85/70/50W <sup>2</sup> 150 = 150/125/100/75W <sup>3</sup>	Blank = 3000/4000/5000K Adjustable	Blank = Bronze W = White	Blank = Adjustable Throw 0°/15°/30°/45°	Blank = 120-277V /480 = 480V	Blank = Selectable Photocell /E = Selectable Photocell w/Battery Backup <sup>4</sup>

<sup>1</sup> S (Small) models only

<sup>2</sup> M (Medium) models only

<sup>3</sup> L (Large) models only

<sup>4</sup> Battery backup available only on M (Medium) and L (Large) models with 120-277V