



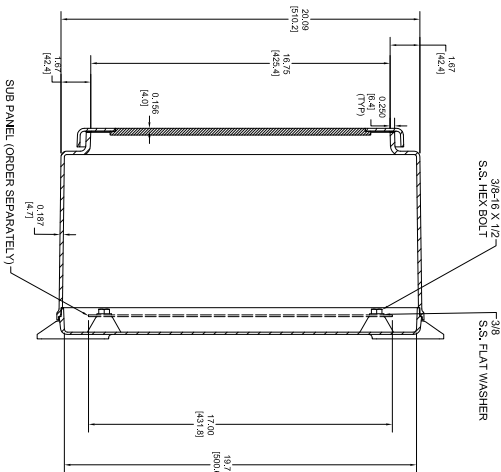

Technical drawing of Detail A, a cross-section of a roof assembly. The drawing shows a cross-section of a roof with a sloped surface. The assembly consists of several layers: a top layer labeled 'COVER' with a thickness of 0.003, a middle layer labeled 'INSUL' with a thickness of 0.156, and a bottom layer labeled 'ADHESIVE' with a thickness of 0.375. The total thickness of the assembly is 0.534. The drawing is labeled 'DETAIL A' and 'SCALE 1:1'.

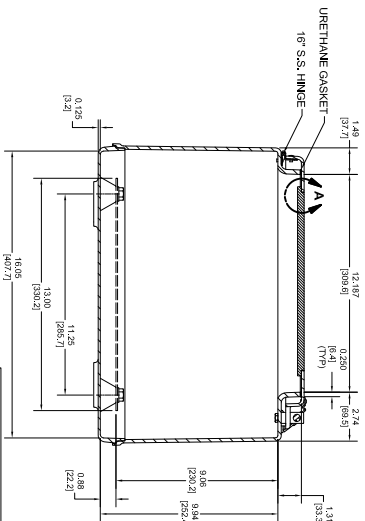

1. ROUTE COVER SHEET DOWN AND REMOVE THE TWO MOUNTING BOLTS WHEN REQUIRED.
2. ROUGH BOTH SURFACES BEFORE BONDING. MINIMUM OVERLAP BETWEEN THE WINDOW OPENING SIZES UP TO 1/4" (6.35 mm), 1/8" (3.18 mm) AND 1/16" (1.57 mm) THICKNESS FOR OPENING SIZES LARGER THAN 1/4" (6.35 mm). 1/8" (3.18 mm) UP TO 31-3/64" (44.66 mm) WINDOW MATERIAL THICKNESS MAY FLUCTUATE ACCORDING TO MANUFACTURE SPECIFIED TOLERANCES:
SARGENT SS 8: 0.125" (3.18 mm) TO 0.200" (5.08 mm) ± 0.001
UL FILE #E44558 VOL. 1, ISEC. GEN. TYPE RATINGS: 1/8" (3.18 mm) ± 0.001
UL FILE #E44558 VOL. 1, ISEC. GEN. TYPE RATINGS: 1/8" (3.18 mm) ± 0.001
AGRICUTUE 42: NOMINAL SIZE 0.354" (9.01 mm)

[illegible]