


# Coatings

## Epoxy



### FOR USE ON:

- Steel beams, structural steel & towers
- Concrete floors & conveyors
- Industrial equipment & storage tanks
- Sewage treatment basins
- Non-potable water storage facilities
- Steel handrails

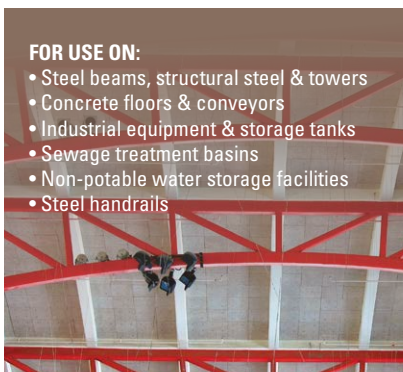

## SC9100 SYSTEM 100 VOC DTM EPOXY MASTIC

Versatile, low VOC epoxy system is perfect for direct-to-metal (DTM), direct to tightly adhered rust, concrete floors and more. A high solids, next generation polyamine converted epoxy.

### • VOC compliant nationwide

- High solids epoxy coating is formulated for use in moderate to severe environments
- Minimizes prep — apply direct-to-metal and tightly adhered rust
- Self priming, single coat provides service life equal to multiple coats of competitive epoxy
- Maximum corrosion protection
- Superior long-term solvent, chemical impact and abrasion resistance
- Outstanding impact resistance
- Convenient 1:1 mixing ratio of base and activator
- Use Oxsol Thinner (#254266) for thinning
- Meets USDA requirements for incidental food contact

### COLORS

- 254157 White
- 254159 Silver Gray

### ACTIVATOR

- 258455 Activator

5 gallons also available. Tint Bases also available for custom colors.

**APPLICATION**

**SUBSTRATE**

|          |              |
|----------|--------------|
| STEEL    | RUSTED STEEL |
| CONCRETE | MASONRY      |

**VOC g/l**

**VOC <100**

**COMPLIANT NATIONWIDE**

Covers: 130-215 sq. ft./gal.



### FOR USE ON:

- Steel beams & structural steel
- Conveyors & industrial equipment
- Machinery & piping
- Areas that are subjected to frequent washdowns or abrasive environments



## 5300 SYSTEM WATER-BASED EPOXY

An exceptional polyamine-cured water-based epoxy coating that provides a hard finish and protection.

### • Provides excellent resistance to chemicals, abrasion, and corrosion

- Can be applied to damp surfaces for minimal downtime
- Excellent adhesion
- Durable high gloss finish
- Meets USDA requirements for incidental food contact

System and primer are two-component systems.

Order base and activator separately.

### COLORS

- 5371408 Dunes Tan
- 5323408 Marlin Blue
- 5368408 Tile Red
- 5382408 Silver Gray
- 5379408 Black
- 5392408 White

### ACTIVATOR

- 5301604 Finish Coat Activator

### PRIMERS

- 5369405 Red Primer
- 5381405 Gray Primer

### PRIMER ACTIVATOR

- 5303502 Primer Activator

### SAFETY COLORS

- 5344408 Safety Yellow

Tint Bases also available for custom colors.

**APPLICATION**

**SUBSTRATE**

|          |            |
|----------|------------|
| STEEL    | GALVANIZED |
| CONCRETE | ALUMINUM   |
| MASONRY  |            |

**VOC g/l**

**VOC <250**

Covers: 200-350 sq. ft./gal.

