

B30 & B33 Series Materials

BradyID.com/s35

Pre-Printed Right-To-Know Chemical Labels (B-595)

- Allows printer to produce 5-color chemical labels in a single print pass
- Indoor/outdoor grade material withstands exposure to moisture, chemicals and handling

Service temp: -40°F to 180°F Application temp: 0°F to 180°F
Average Outdoor Durability: 8 to 10 years
Agency approvals: RoHS



Fits Printer Model(s)	Catalog #	B#	Legend	Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP31, 33, 35, 37 Only	B30-244-595-NFPA	B-595		2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
BBP31, 33, 35, 37 Only	B30-245-595-NFPA	B-595		2.250 (57.5)	4.000 (101.6)	1	240	B30-R10000
BBP31, 33, 35, 37 Only	B30-263-595-NFPA	B-595		4.000 (101.6)	6.250 (158.8)	1	170	B30-R10000
BBP31, 33, 35, 37 Only	B30-244-595-DIAM	B-595		2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
BBP31, 33, 35, 37 Only	B30-161-595-DIAM	B-595		4.000 (101.6)	4.000 (101.6)	1	240	B30-R10000
BBP31, 33, 35, 37 Only	B30-246-595-NFR	B-595		1.125 (28.6)	3.000 (76.2)	1	300	B30-R10000
BBP31, 33, 35, 37 Only	B30-244-595-CB	B-595		2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
BBP31, 33, 35, 37 Only	B30-245-595-CB	B-595		2.250 (57.5)	4.000 (101.6)	1	240	B30-R10000
BBP31, 33, 35, 37 Only	B30-263-595-CB	B-595		4.000 (101.6)	6.250 (158.8)	1	170	B30-R10000
BBP31, 33, 35, 37 Only	B30-244-595-HMIG	B-595		2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
BBP31, 33, 35, 37 Only	B30-246-595-HMIG	B-595		1.125 (28.6)	3.000 (76.2)	1	300	B30-R10000

Benchtop Printers

Paper Labels (B-424)

- Economical choice for light duty general ID
- White finish and matte topcoat
- Excellent contrast and smear resistance for barcode printing

Service temp: -40°F to 124°F Agency approvals: RoHS




Figure 2



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP33 Only	Fig. 2	B33-53-424	B-424	White	2.000 (50.8)	0.500 (12.7)	-	0.600 (15.2)	2.200 (55.9)	1	2500	B30-R4300
BBP33 Only	Fig. 2	B33-17-424	B-424	White	2.000 (50.8)	1.000 (25.4)	1.125 (28.6)	2.200 (55.9)	-	1	1500	B30-R4300
BBP33 Only	Fig. 2	B33-7-424	B-424	White	2.750 (69.9)	1.250 (31.8)	-	1.375 (34.9)	2.950 (74.9)	1	1000	B30-R4300
BBP33 Only	Fig. 2	B33-18-424	B-424	White	3.000 (76.2)	1.000 (25.4)	1.125 (28.6)	3.200 (81.3)	-	1	1500	B30-R4300
BBP33 Only	Fig. 2	B33-19-424	B-424	White	3.000 (76.2)	2.000 (50.8)	2.125 (54.0)	3.200 (81.3)	-	1	500	B30-R4300
BBP33 Only	Fig. 2	B33-20-424	B-424	White	3.000 (76.2)	5.000 (127)	-	5.125 (130.2)	3.200 (81.3)	1	250	B30-R4300
BBP33 Only	Fig. 2	B33-55-424	B-424	White	4.000 (101.6)	2.000 (50.8)	-	2.125 (54.0)	4.200 (106.7)	1	750	B30-R4300
BBP33 Only	Fig. 2	B33-25-424	B-424	White	4.000 (101.6)	6.000 (152.4)	6.125 (155.6)	4.200 (106.7)	-	1	350	B30-R4300


B30 Series

Polypropylene Labels (B-425)

- General labeling material for indoor use
- Outstanding chemical and solvent resistance and print performance
- Not recommended for prolonged outdoor use (use B-595 material for 8-10 year outdoor use)

Service temp: -94°F to 212°F

Agency approvals:

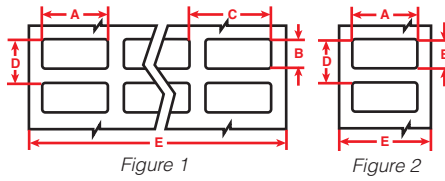

Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP33 Only	Fig. 1	B33-5-425	B-425	White	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	5000	B30-R4300
BBP33 Only	Fig. 2	B33-17-425	B-425	White	2.000 (50.8)	1.000 (25.4)	-	1.125 (28.6)	2.200 (55.9)	1	1500	B30-R4300
BBP33 Only	Fig. 2	B33-18-425	B-425	White	3.000 (76.2)	1.000 (25.4)	-	1.125 (28.6)	3.200 (81.3)	1	1500	B30-R4300
BBP33 Only	Fig. 2	B33-19-425	B-425	White	3.000 (76.2)	2.000 (50.8)	-	2.125 (54.0)	3.200 (81.3)	1	500	B30-R4300

Retro Reflective Tape (B-584)

- Highly reflective material shines back brightly when struck by light
- Ideal for labeling outdoor utility pedestals, hard hats, jobsite equipment and roof-top equipment
- Recommended for low light or inclement weather conditions

Service Temp: -40°F to 158°F

Application Temp: 0°F to 158°F (yellow & orange), 50°F to 158°F (silver)

Average Outdoor Durability: 4 to 6 years



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-584-SL	B-584	Silver	1.125 (28.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-584-SL	B-584	Silver	2.250 (57.5)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-584-SL	B-584	Silver	4.000 (101.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-584-YL	B-584	Yellow	1.125 (28.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-584-YL	B-584	Yellow	2.250 (57.5)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-584-YL	B-584	Yellow	4.000 (101.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-584-OR	B-584	Orange	1.125 (28.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-584-OR	B-584	Orange	2.250 (57.5)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-584-OR	B-584	Orange	4.000 (101.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000

BradyGlo™ High-Intensity Photoluminescent Tape (B-526)

- For glow-in-the-dark identification up to 10 hours
- Designed for directional and evacuation marking and equipment marking
- Ideal for marking emergency utility shut-offs, fire extinguishers, alarm pulls and vital equipment controls
- Complies with indoor use requirements specified in RS 6-1 and 6-1A of New York Local Law 26

Service Temp: -40°F to 140°F Application Temp: 40°F to 140°F



Fits Printer Model(s)	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP30, 31, 33, 35, 37	Fig. 33	B30C-1125-526	B-526	Luminous Green	1.125 (28.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-2250-526	B-526	Luminous Green	2.250 (57.5)	50ft. (15.2m)	1 roll (cont.)	B30-R10000
BBP30, 31, 33, 35, 37	Fig. 33	B30C-4000-526	B-526	Luminous Green	4.000 (101.6)	50ft. (15.2m)	1 roll (cont.)	B30-R10000