


200A Loadbreak Bushing Installation Tool (BIT/E180AT and BIT/E180AH)

The BIT/E180 Series Bushing Insert Tool provides preset torque for installation and removal of bushing inserts with a 5/16" internal hex socket. Available in both T-Handle (AT) and OP eye (AH) versions.

BIT/E180AT Bushing Insert Tool with 180 in-lb torque limiter and T-handle - 5/16" hex shaft

BIT/E180AH Bushing Insert Tool with 180 in-lb torque limiter and operating eye 5/16" hex shaft (same as Elastimold 200AT and Cooper LB 1)

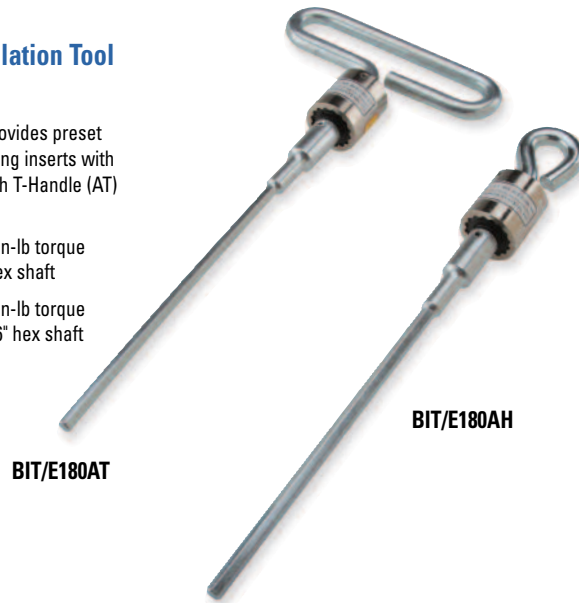

Features:

- Preset torque limiter takes guesswork out of bushing installation
- Can be used for bushing removal




600A LRTP Torquing Installation Tool (LRTP/TK240AT, LRTP/TK240AH and LRTP/TK55)

The LRTP Series Bushing Insert Tool provides preset torque for installation and removal of 600A load reducing tap plug bushings with a 5/16" and/or 3/8" internal hex socket.

LRTP/TK240AT Bushing Insert Tool for 600A LRTP with T-Handle and 240 in-lb torque limiter

LRTP/TK240AH Bushing Insert Tool for 600A LRTP with op eye and 240 in-lb torque limiter

LRTP/TK55 Bushing Insert Tool for 600A LRTP with 55 ft-lb torque limiter and 1/2" drive

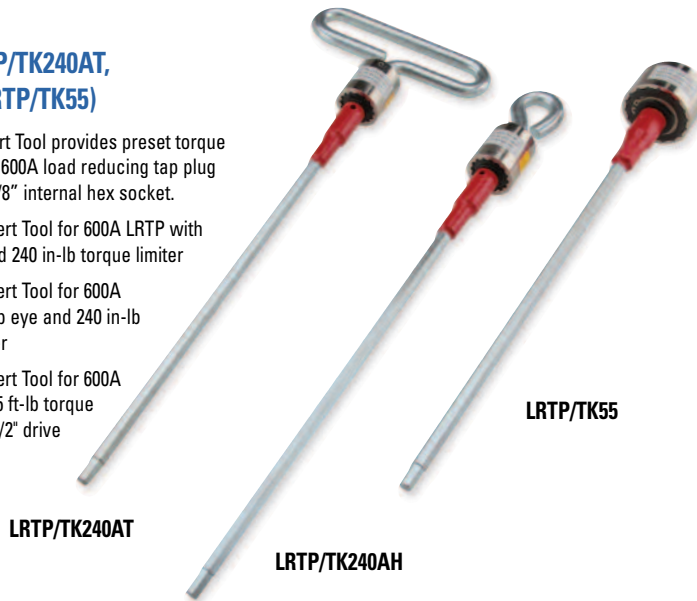

Features:

- Preset torque limiter takes guesswork out of bushing installation
- Can be used for bushing removal

600A LRTP/T-OP II Installation Tools without Torque Limiter

The TW516-13 and W516-13 provide a 5/16" hex shaft with or without T-Handle for installing the shear pin component in T-OP II installations.

The LRTP-12 Bushing Insert Tool provides for installation and removal of 600A reducing tap plug bushings with a 5/16" and/or 3/8" internal hex socket. The LRTP-12 requires a separate torque wrench.

W516-13 Hex shaft for T-OP II Installation has 5/16" shaft with 3/8" drive

TW516-13 T-Wrench for T-OP II Installation has 5/16" shaft with T-Handle

LRTP-12 LRTP Shaft only with 1/2" drive

