


# 15T2F

## TRANSFORMER DRY 3PH 15KVA

### 480V-208Y/120V

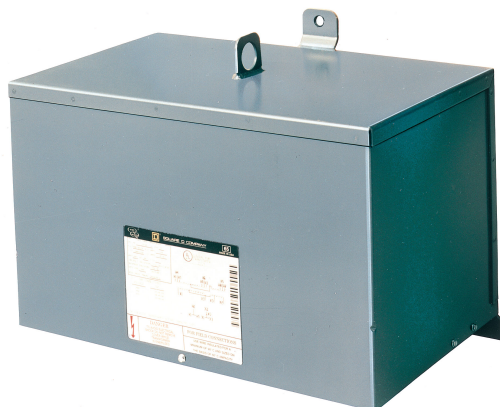

#### Main

Application	General Purpose - Intended for power, heating and lighting applications
Approvals	UL Listed - CSA Certified
Depth	12.25 Inches
Enclosure Code	14C
Enclosure Material	Painted Steel
Enclosure Rating	NEMA 3R
Enclosure Type	Rainproof and Ice/Sleet proof (Indoor/Outdoor)
Full Capacity Taps	(2) 5% FCBN
Height	14.75 Inches
Insulation Temperature	180 Degrees C
Mounting Brackets	Wall mounting brackets are standard part of enclosure
Mounting Type	Wall
Phase	3-Phase
Primary	480VAC (Delta)
Rating	15kVA
Secondary	208Y/120VAC
Temperature Rise	115 Degrees C
Weathershield	Not required for outdoor use
Width	19.10 Inches
Winding Material	Copper

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.