


IN EACH PHASE CONNECT TO TAPS	
PRIMARY VOLTS	2-5 %FCBN
480	H1-H4
456	H1-H3
432	H1-H2

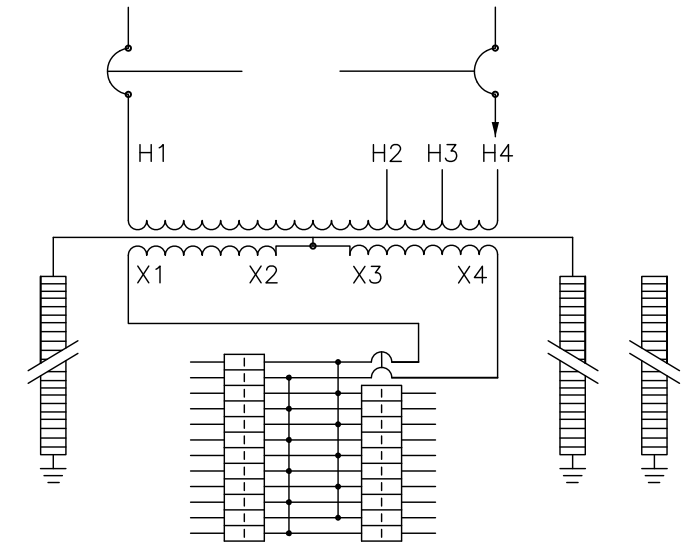

UNIT SUBSTATION SPECIFICATIONS:

15 KVA 1Ø 60 HZ
 PRIMARY VOLTAGE 480
 SECONDARY VOLTAGE 120/240
 115°C RISE
 180°C INSULATION SYSTEM
 APPROXIMATE WEIGHT: 350 LBS
 GUARANTEED SOUND LEVEL: 45 dB
 PRIMARY MAIN BREAKER: HDL26060
 SECONDARY MAIN BREAKER: QO2080
 PANELBOARD INTERIOR: QON124L200PI WITH 22 AVAILABLE SPACES
 USE SQUARE D TYPE QO, QOA AND QOC BRANCH
 CIRCUIT BREAKERS FOR 240VAC SYSTEMS.

DUAL DIMENSIONS: INCHES
 MILLIMETERS

NOTES:
 1) NEMA 3R ENCLOSURE
 2) MINIMUM FIELD CLEARANCES: 12.00/[305] SIDE AND 12.00/[305] VERTICAL

SEALED MINI POWER-ZONE
 UNIT SUBSTATION
 CATALOG NO MPU15S40F
 1 PHASE, 15kVA,
 PRIMARY 480 ,SECONDARY 120/240



DWG# MPU15S40F
 NO.