



THICKNESS GAGES



ENGLISH AND METRIC THICKNESS GAGES

.0015-.200"/0.03-5MM

These gages are used in automotive, aviation, diesel and farm equipment manufacture and service and also in jig, fixture, gage and experimental work. Especially useful in adjusting tappets, spark plugs, distributor points, checking bearing clearances and gear play, fitting pistons, rings and pins and gaging narrow slots. Made in a wide range of types and sizes, each having from 6 up to 26 leaves ranging in thickness from .0015-.200" and 0.03-5mm thick, straight or tapered.

- Leaves made of finest tempered-steel, carefully finished to correct thickness, individually tested and marked with thickness
- Locking device on most gages permits securely locking one or more leaves in position
- Leaves easily removed or replaced
- Rugged, substantial steel case protects leaves

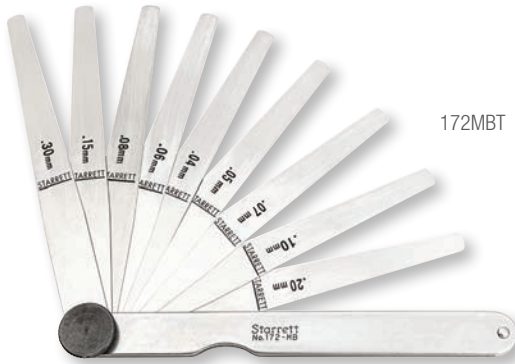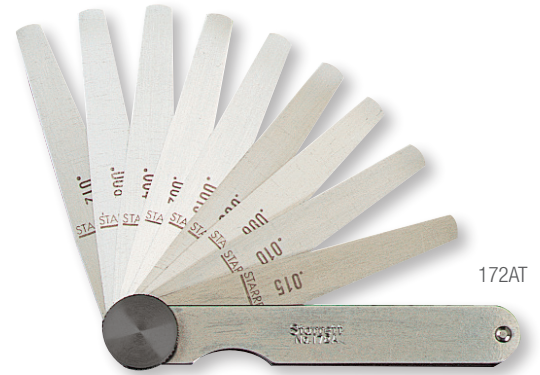

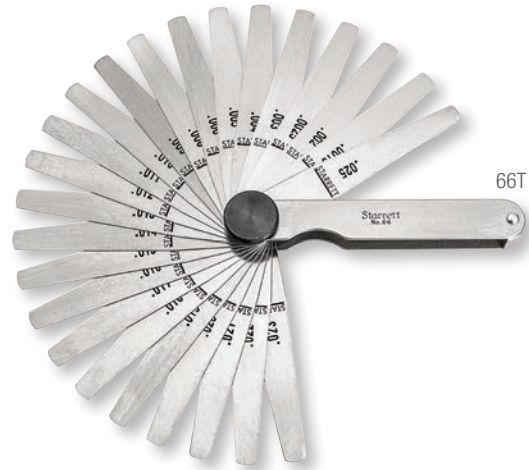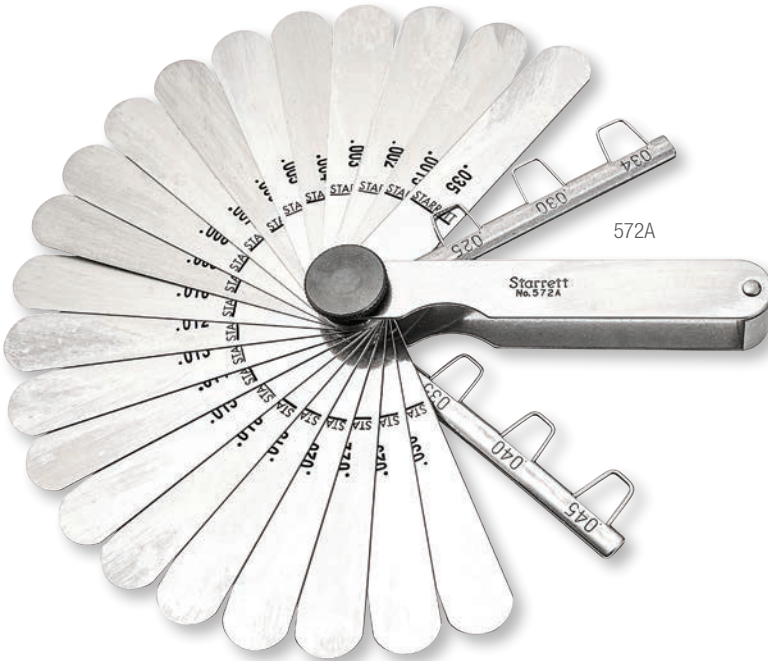

Inch Reading Thickness Gages with Straight Leaves

Cat. No.	EDP	No. of Leaves	Size Leaves	(Range) Leaf Thickness (Inches)	Description/Remarks
172A	50649	9	1/2 x 3-1/32"	.0015, .002, .003, .004, .006, .008, .010, .012, .015	With Locking Device
66	50314	26	1/2 x 3-1/32"	.0015, .002, .0025, .003, .004, .005, .006, .007, .008, .009, .010, .011, .012, .013, .014, .015, .016, .017, .018, .019, .020, .021, .022, .023, .024, .025	With Locking Device
66B	57097	31	1/2 x 3-1/32"	.0015, .002, .0025, .003, .004, .005, .006, .007, .008, .009, .010, .011, .012, .013, .014, .015, .016, .017, .018, .019, .020, .021, .022, .023, .024, .025, .026, .028, .030, .032, .035	With Locking Device
467	52464	13	1/2 x 4-1/2"	.0015, .002, .003, .004, .006, .008, .010, .020, .030, .040, .075, .100, .200	With Locking Device
172E	50654	8	1/2 x 12"	.002, .003, .004, .005, .006, .008, .010, .015	With Locking Device
572A	57098	22	1/2 x 3-1/32"	.0015, .002, .0025, .003, .004, .005, .006, .007, .008, .009, .010, .012, .013, .014, .015, .016, .018, .020, .022, .025, .030, .035 6 Spark Plug Wire Gages: .025, .030, .034, .035, .040, .045	With Locking Device and Spark Plug Wire Gages
572B	57099	22	1/2 x 3-1/32"	.0015, .002, .0025, .003, .004, .005, .006, .007, .008, .009, .010, .012, .013, .014, .015, .016, .018, .020, .022, .025, .030, .035	With Locking Device

Inch Reading Thickness Gages with Tapered Leaves

66T	50315	26	1/2-1/4 x 3-1/32"	.0015, .002, .0025, .003, .004, .005, .006, .007, .008, .009, .010, .011, .012, .013, .014, .015, .016, .017, .018, .019, .020, .021, .022, .023, .024, .025	With Locking Device
172AT	50650	9	1/2-1/4 x 3-1/32"	.0015, .002, .003, .004, .006, .008, .010, .012, .015	With Locking Device
172CT	50652	8	1/2-1/4 x 6"	.002, .003, .004, .006, .008, .010, .012, .015	With Locking Device

Millimeter Reading Thickness Gages with Straight Leaves

66MA	55974	20	12.7 x 77mm	0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 0.95, 1.0	With Locking Device
173MA	57086	13	12.7 x 77mm	0.03, 0.04, 0.05, 0.06, 0.07, 0.08, 0.09, 0.10, 0.15, 0.20, 0.30, 0.40, 0.50	With Locking Device
467M	52465	13	12.7 x 114mm	0.04, 0.05, 0.06, 0.07, 0.08, 0.10, 0.15, 0.20, 0.30, 1.0, 2.0, 3.0, 5.0	With Locking Device

Millimeter Reading Thickness Gages with Tapered Leaves

172MBT	50656	9	12.7-7 x 114mm	0.04, 0.05, 0.06, 0.07, 0.08, 0.10, 0.15, 0.20, 0.30	With Locking Device
173MAT	57087	13	12.7-7 x 77mm	0.03, 0.04, 0.05, 0.06, 0.07, 0.08, 0.09, 0.10, 0.15, 0.20, 0.30, 0.40, 0.50	With Locking Device
173MCT	57088	13	12.7-7 x 152mm	0.03, 0.04, 0.05, 0.06, 0.07, 0.08, 0.09, 0.10, 0.15, 0.20, 0.30, 0.40, 0.50	With Locking Device

