

Crosby® SHUR-LOC® Hooks

Fatigue Rated

QT
QUENCHED & TEMPERED

QUIC-CHECK®

Crosby 8/10™



SEE APPLICATION AND WARNING INFORMATION

Para Español: www.thecrosbygroup.com

On Pages 265-266

S-1316



All SHUR-LOC® hooks have the following features:

- Forged Alloy Steel - Quenched and Tempered.
- Recessed trigger design is flush with the hook body, protecting the trigger from potential damage.
 - Easy to operate with enlarged thumb access.
- Positive Lock Latch is Self-Locking when hook is loaded.
- The SHUR-LOC® hook, if properly installed and locked, can be used for personnel lifting applications and meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).

Eye Style incorporates these added features:


- Individually Proof Tested to 2-1/2 times the 4:1 Working Load Limit with certification.
- Fatigue rated at 1-1/2 times the Working Load Limit at 20,000 cycles.
- 25% stronger than Grade 80.
- Suitable for use with Grade 100 and Grade 80 chain.
- Designed with "Engineered Flat" to connect to S-1325 chain coupler.

S-1318A



SHUR-LOC® Hook Series with Positive Locking Latch


S-1316 Eye Hook

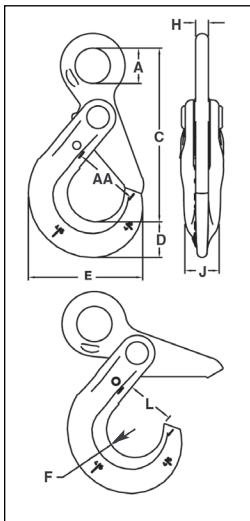

Chain Size		Working Load Limit (lbs.)*	Wire Rope XXIP IWRC Mechanical Splice		S-1316 Stock No.	Weight Each (lbs.)	Dimensions (in.)								
(in.)	(mm)		Size (in.)	Working Load Limit (lbs.) 5:1			A	C	D	E	F	H	J	L	AA
-	6	3200	5/16	2200	1022896	.85	.78	3.95	.79	2.60	.67	.31	.63	1.14	1.50
1/4-5/16	7-8	5700	7/16	4200	1022914	1.80	1.08	5.31	1.10	3.50	.87	.39	.81	1.48	2.00
3/8	10	8800	1/2	5600	1022923	3.40	1.30	6.57	1.17	4.39	1.10	.51	.94	1.83	2.50
1/2	13	15000	3/4	12400	1022932	6.00	1.65	8.23	1.67	5.45	1.26	.67	1.16	2.22	3.00
5/8	16	22600	7/8	16600	1022941	15.1	2.20	10.06	2.04	6.56	1.50	.87	1.50	2.65	3.50
3/4	18-20	35300	1	22000	1022942	19.0	2.60	10.77	2.22	7.76	2.01	.87	2.03	3.52	-
7/8	22	42700	1-1/8	26500	1022943	28.0	2.87	12.49	2.45	8.75	2.27	.98	2.20	3.83	-
1	26	59700	-	-	1022944	49.5	3.15	14.60	3.21	9.87	2.46	1.26	2.68	4.09	-

* Minimum Ultimate Load is 4 times the Working Load Limit.

S-1318A SHUR-LOC® Shank Hooks

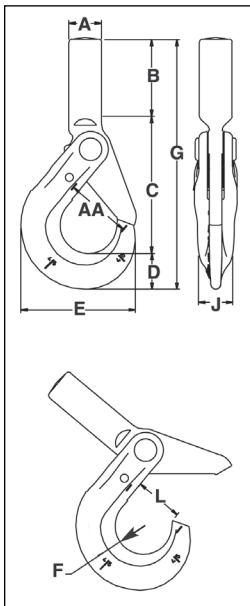

Chain Size		S-1318A Stock No.	Frame code	Grade 100 Alloy Chain Working Load Limit (lbs.)*	Dimensions (in.)										Weight Each (lbs.)
(in.)	(mm)				A†	B	C	D	E	F	G	J	L	AA	
-	6	1098200	D	3200	.79	2.16	3.31	.79	2.60	.67	6.26	.63	1.16	1.50	1.00
1/4-5/16	7-8	1098209	G	5700	1.00	2.40	4.16	1.10	3.51	.87	7.66	.81	1.48	2.00	1.99
3/8	10	1098218	H	8800	1.14	2.95	5.14	1.17	4.39	1.10	9.26	.94	1.83	2.50	3.56
1/2	13	1098227	I	15000	1.34	3.35	6.31	1.67	5.49	1.26	11.33	1.16	2.22	3.00	7.00
5/8	16	1098236	J	22600	1.63	3.94	7.28	2.04	6.55	1.50	13.26	1.50	2.65	3.50	16.00

* Ultimate Load is 4 times the Working Load Limit based on Grade 100 chain.

† Dimension before machining (as forged).