

Crosby® Connecting Links




G-334 / S-334



- Forged Steel - Quenched and Tempered.
- Has larger inside dimensions making it easier to attach hooks or other fittings to the chain.
- An exclusive Crosby product.
- After making connections, rivets must be peened.

Pear Shape "Missing Link"® Replacement Links

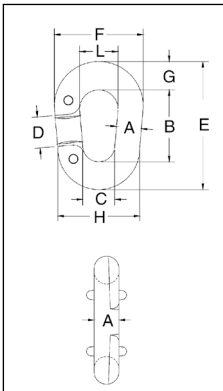

| Chain Size (in.) | Stock No. | | Working Load Limit (lbs.)* | Weight Per 100 (lbs.) | Dimensions (in.) | | | | | | | | |
|------------------|-------------|------------|----------------------------|-----------------------|------------------|------|------|------|------|------|-----|------|------|
| | G-334 Galv. | S-334 S.C. | | | A | B | C | D | E | F | G | H | L |
| 3/8 | 1013432 | 1013441 | 1850 | 25.00 | .41 | 2.00 | .56 | .81 | 2.94 | 1.63 | .47 | 1.38 | .81 |
| 1/2 | 1013450 | 1013469 | 3300 | 50.00 | .50 | 2.50 | .69 | 1.00 | 3.63 | 2.00 | .56 | 1.69 | 1.00 |
| 5/8 | 1013478 | 1013487 | 5000 | 75.00 | .63 | 2.75 | .81 | 1.06 | 4.00 | 2.38 | .63 | 2.06 | 1.13 |
| 3/4 | 1013496 | 1013502 | 7100 | 125.00 | .75 | 3.13 | 1.00 | 1.13 | 4.75 | 2.75 | .81 | 2.50 | 1.25 |
| 7/8 | 1013511 | 1013520 | 9600 | 200.00 | .88 | 3.69 | 1.25 | 1.38 | 5.56 | 3.25 | .94 | 3.00 | 1.50 |

* Ultimate Load is 4 times the Working Load Limit.

Not Suitable for use with Grade 80 or Grade 100 chain and chain slings used in overhead lifting.




G-335 / S-335



- Forged Steel - Quenched and Tempered.
- Integral rivets join the two halves.
- After making connections, rivets must be peened.

Meets or exceeds the performance requirements of Federal Specifications RRC-271D, Type II, except for those provisions required of the contractor. For additional information, see page 391.

"Missing Link"® Replacement Links

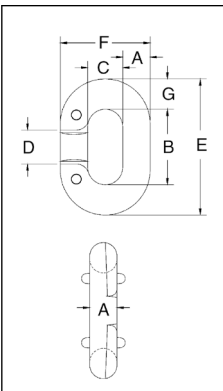

| Chain Size (in.) | Stock No. | | Working Load Limit (lbs.)* | Links Per Box | Weight Per 100 (lbs.) | Dimensions (in.) | | | | | | |
|------------------|-------------|------------|----------------------------|---------------|-----------------------|------------------|------|------|------|------|------|------|
| | G-335 Galv. | S-335 S.C. | | | | A | B | C | D | E | F | G |
| **3/16 | 1013094 | 1013101 | 800 | 20 | 2.50 | .25 | .69 | .34 | .34 | 1.19 | .78 | .28 |
| **1/4 | 1013110 | 1013129 | 1325 | 10 | 6.25 | .28 | .88 | .44 | .44 | 1.50 | 1.00 | .31 |
| **5/16 | 1013138 | 1013147 | 1950 | 10 | 12.50 | .34 | .94 | .47 | .47 | 1.69 | 1.16 | .38 |
| 3/8 | 1013156 | 1013165 | 2750 | 10 | 20.00 | .41 | 1.13 | .56 | .56 | 2.06 | 1.38 | .47 |
| 7/16 | 1013174 | 1013183 | 3625 | 10 | 27.50 | .47 | 1.28 | .59 | .59 | 2.34 | 1.53 | .53 |
| 1/2 | 1013192 | 1013209 | 4750 | 10 | 37.50 | .53 | 1.47 | .66 | .66 | 2.66 | 1.72 | .59 |
| 5/8 | 1013236 | 1013245 | 7250 | 10 | 72.50 | .66 | 1.81 | .78 | .81 | 3.31 | 2.09 | .75 |
| 3/4 | 1013254 | 1013263 | 10250 | 10 | 122.50 | .78 | 2.13 | .94 | 1.06 | 3.88 | 2.50 | .88 |
| 7/8 | 1013272 | 1013281 | 12000 | Bulk | 175.00 | .91 | 2.50 | 1.13 | 1.13 | 4.50 | 2.94 | 1.00 |
| † 1 | 1013290 | 1013307 | 15500 | Bulk | 250.00 | 1.03 | 2.75 | 1.25 | 1.25 | 5.00 | 3.31 | 1.13 |

* Ultimate Load is 4 times the Working Load Limit.

** Rivets Only - No interlocking lugs.

† Has reinforced rivet holes. All sizes have countersunk rivet holes.

Not Suitable for use with Grade 80 or Grade 100 chain and chain slings used in overhead lifting.