

Carlton[®] PVC New Work Boxes




Carlton[®] Blue PVC Boxes

Carlton[®] Blue PVC Boxes Carlton[®] non-metallic boxes feature PVC construction for easier installation, greater performance, and lower installation cost. Designed and listed for use with non-metallic sheathed cable in accordance with Article 314 of the National Electrical Code[®], they make fast work of any residential or light commercial application.

- All PVC boxes are listed to UL514C
- All PVC boxes are listed for masonry walls
- All PVC boxes are UL Classified for 2 hr. fire wall and/or fire ceiling
- All PVC boxes meet NEMA OS-2
- All PVC boxes are permissible for use with 90 degree C conductors
- UL File E11461 and R9140

One-Gang Adjustable

- Patented design allows for adjustment from 0" to 1³/₄" after installation
- Ideal for new work or retrofit upgrade applications
- Backless low voltage bracket and floor box designs available
- Ideal for various drywall thicknesses and wall finishes

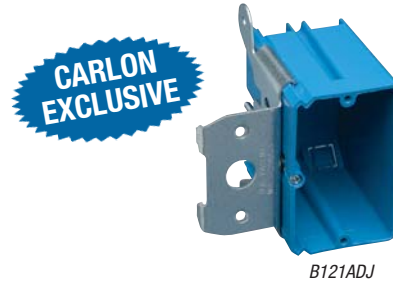


B121ADJ



One-Gang Adjustable 21.0 Cu. In

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
B121ADJ	21.0	Adjustable bracket	Adjusts 0" - 1 ³ / ₄ "	3 ³ / ₄ L x 3 ⁷ / ₈ W x 3 ³ / ₈ D	24

One-Gang Nail-On

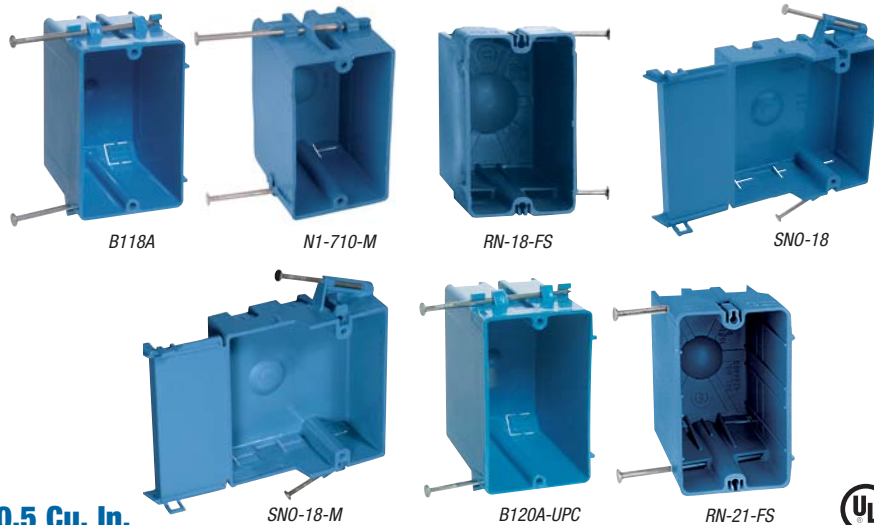

One-Gang Nail-On 18.0 - 20.5 Cu. In.

CAT. NO.	SIZE CU. IN.	MOUNTING MEANS	DESCRIPTION	DIMENSIONS (IN.)	STD. CTN. QTY.
B118A	18.0	Captive nails	—	3 ³ / ₄ L x 2 ¹ / ₄ W x 2 ⁷ / ₈ D	100
N1-710-M	18.0	Reverse angled side nails	7 ³ / ₃₂ " offset wallboard tabs	3 ³ / ₄ L x 2 ¹ / ₄ W x 2 ¹¹ / ₁₆ D	100
RN-18-FS	18.0	Recessed angled nails	Fast set	3 ² / ₃₂ L x 2 ⁵ / ₁₆ W x 3 D	100
SNO-18	18.0	Angled side nails	Hinge closure	4 ¹ / ₁₆ L x 2 ⁵ / ₁₆ opening 3 ⁷ / ₈ overall W x 1 ³ / ₄ D	100
SNO-18-M	18.0	Angled side nails	Locating tab hinge closure 3 ¹ / ₁₆ " offset wall board tabs	4 ¹ / ₁₆ L x 2 ⁵ / ₁₆ opening 3 ⁷ / ₈ overall W x 1 ³ / ₄ D	100
B120A-UPC	20.0	Captive nails	—	3 ⁷ / ₈ L x 2 ¹ / ₄ W x 3 ¹ / ₄ D	100
RN-21-FS	20.5	Recessed angled nails	Fast set	3 ² / ₃₂ L x 2 ⁵ / ₁₆ W x 3 ³ / ₈ D	100



United States
Tel: 901.252.8000
Fax: 901.252.1354

Technical Services
Tel: 888.862.3289

Thomas & Betts

www.tnb.com