



# GFCI In-Line Cord Sets



25080 011-6

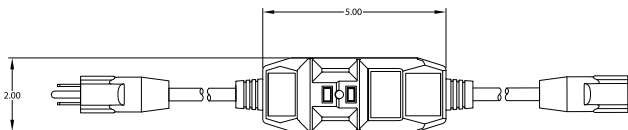

## GFCI In-Line Cord Sets

Excellent for industrial plant maintenance, equipment service and construction site applications. Provides compliance with National Electric Code (NEC 2008) Article 590.6 for "Temporary Installations." Applications include:

- ▶ High Pressure Sprayer Washers
- ▶ Drain Snakes
- ▶ Construction Sites
- ▶ Construction Site Power Tools
- ▶ Pumps
- ▶ Industrial Appliances

Rainproof rated, UL listed for outdoor use. Custom cable gauges, lengths and terminations available by special order. To prevent unmonitored equipment startup, manual reset is required after GFCI trip and power outage.

### FEATURES

<b>25080 011-6</b> (2') (i)	<b>25090 001-6</b> (2') (i)	<b>26000 011-6</b> (2') (i)
<b>25080 016-3</b> (6')	<b>25090 006-3</b> (6')	<b>26000 016-3</b> (6')
<b>25080 025-2</b> (25')	<b>25090 025-2</b> (25')	<b>26000 125-2</b> (25')
▶ Volts /Amps: 120V/20A	▶ Volts /Amps: 240V/15A	▶ Volts /Amps: 240V/20A
▶ Cord Gauge: 12/3 AWG	▶ Cord Gauge: 14/3 AWG	▶ Cord Gauge: 12/3 AWG
▶ NEMA 5-20 P&R, Black	▶ NEMA 6-15 P&R, Black	▶ NEMA 6-20 P&R, Black
▶ Trip Level: 4-6 mA	▶ Trip Level: 4-6 mA	▶ Trip Level: 4-6 mA
<b>26020 002-6</b> (2') (i)	<b>26020 011-6</b> (2') (i)	
<b>*26020 121-6</b> (2')	<b>*26020 115-6</b> (2')	
<b>26020 007-3</b> (6')	<b>26020 016-3</b> (6')	
<b>26020 124-2</b> (25')	<b>26020 125-2</b> (25')	
<b>26020 050-1</b> (50')	<b>26020 150-1</b> (50')	
<b>26020 099-1</b> (100')	▶ Volts /Amps: 120V/15A	
▶ Volts /Amps: 120V/15A	▶ Cord Gauge: 12/3 AWG	
▶ Cord Gauge: 14/3 AWG	▶ NEMA 5-15 P&R, Black	
▶ NEMA 5-15 P&R, Black	▶ Trip Level: 4-6 mA	
▶ Trip Level: 4-6 mA	▶ *Lighted receptacle	
▶ *Lighted receptacle		



### TECHNICAL DATA

<b>Grounded Neutral</b>	4 Ohms typical
<b>Trip response time for ground fault and grounded neutral trip</b>	less than 25mS
<b>Voltage surge withstand</b>	3kv ringwave test and 4kv/2kA surge immunity test
<b>Radio frequency noise susceptibility</b>	operates within normal limits with 0.5 volts injected on power line 150kHz-230mHz
<b>Frequency</b>	50 / 60 Hz
<b>Endurance</b>	3,000 operations minimum
<b>Overload Current</b>	six times rated current
<b>Operating temperature range</b>	-35°C to 66°C
<b>Effect of 10 Amp turn DC Shock on ground fault trip</b>	5% maximum trip level variation
<b>Insulation voltage</b>	1500 VRMS - 1 Min.
<b>Power On indication</b>	lighted indicator