

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE

Provides task or accent illumination in residential and light commercial applications. Ideal for use under cabinets, offering shadow-free lighting in kitchens and work areas, in bookcases, display cabinets or above cabinets, setting a warm, inviting atmosphere in the kitchen. **If required for commercial application or operation more than eight (8) hours per day, consult factory for available options.**

ATTRIBUTES

Low-profile design, with off/on rocker switch. Can be direct wired or powered by 5' cord-and-plug (included). Connect multiple fixtures with 13" connector cord (Included).

Rugged post-painted low-profile steel housing, available in either white or bronze finish. Acrylic white diffuser provides soft widespread illumination with zip-lock design for easy installation, lamp access, cleaning and superior retention. Separate snap on/off service tray for easy maintenance.

Includes (1) linear T5 3500K fluorescent lamp for energy efficiency, superior color rendering and long life.

Standard with residential-grade electronic ballast (120-volt, 60Hz) ensures no flickering and quiet operation without interfering with other home electronics.

For use with non-dimmable switches only.

All mounting hardware included.

LISTING

CUL listed to US and Canadian safety standards and suitable for damp locations.

WARRANTY


1-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomResources/Terms_and_conditions.aspx

Note: Specifications subject to change without notice.

Indoor General Purpose

Cabinet Light Linkable - T5

T5 FLUORESCENT

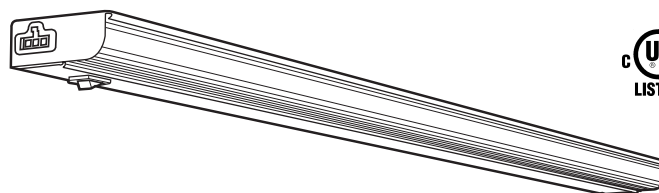


DIMENSIONS

Nominal size	Lamp configuration	Model number	Number of lamps	(A) Width inches (cm)	(B) Length inches (cm)	(C) Extension* inches (cm)
12"		UCSD 8	(1) 8W linear T5	2-5/8" (6.7)	12-1/4" (30.5)	1" (2.5)
23"		UCSD 14	(1) 14W linear T5	2-5/8" (6.7)	22-3/4" (57.8)	1" (2.5)
34"		UCSD 21	(1) 21W linear T5	2-5/8" (6.7)	34-1/2" (87.6)	1" (2.5)

*Extension from ceiling

All dimensions are shown in inches (centimeters) unless otherwise noted.

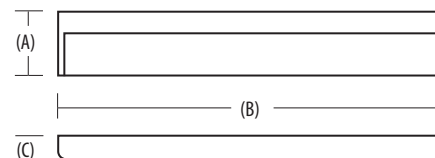

ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

Example: UCSD 8 120 LP

Series ^{1,2,3}	Ballast/voltage	Lamp included	Finish
UCSD 8 12" - (1) 8W T5 lamp	120 120-volt electronic ballast (standard)	LP Standard	(blank) White BZ Bronze
UCSD 14 23" - (1) 14W T5 lamp			
UCSD 21 34" - (1) 21W T5 lamp			

Accessories /Replacement Parts

UCD JB	Splice box - allows for quick and easy direct wiring
UC ERC	1-1/8" row connector for end-to-end connections
UC ERC24	24" connector cord for longer length connections
UCH WWC	18" white cord cover to conceal cord

Notes:

- 1 Includes linear T5 fluorescent lamp.
- 2 Use with non-dimmable switches only.
- 3 Maximum quantity of cabinet fixtures that can be connected from a single power source cannot exceed 540 watts from the lamp wattage.

Cabinet Light T5 Fluorescent

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.