

VuLite®

6" IC NEW CONSTRUCTION HOUSING

INCANDESCENT LAMPS

V6ICW

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

IC Air-Loc® Housing • Energy efficient, sealed housing • Can be completely covered with insulation • When used with Air-Loc Gasket (see accessories), stops infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol **Air-LOC** do not require a gasket.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected—see reverse.

Socket Medium base porcelain socket with nickel-plated copper screw shell • Adjustable socket plate and detachable socket with snap-in springs to accommodate various lamp and trim combinations • Shipped with socket cap to protect against paint overspray.

Trims Trim selection shown on reverse.

Labels UL/cUL listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps • UL/cUL Listed • Trims V3040N and V3041 are wet location approved for covered ceiling applications • Trims V3034 and V3037 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps**.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

INSTALLATION



Bar Hangers Telescoping bar hangers with captive nail allow for quick placement of housing anywhere within 24" O.C. joists • Can be installed in suspended ceiling grid using T-bar clip accessory • Bars scored in two locations for fast, clean breaking, allowing housing installation in tight applications • Edge-mounted for extra strength and captive to mounting frame • May be installed either perpendicular or parallel to junction box • Locking set screw locks fixture in position • Alternate mounting holes included.

Junction Box Pre-wired junction box provided with (5) ½" and (1) ¾" knockouts, (4) Non-metallic sheathed cable connectors and ground wire, UL/cUL listed for through-branch wiring, maximum 8 No. 12 AWG 90° C branch circuit conductors (4 in, 4 out) • Junction box provided with removable access plates • Knockouts equipped with pryout slots • Push-in electrical connectors included.

Mounting Frame 24-gauge die-formed galvanized steel mounting frame • Rough-in section (junction box, mounting frame, housing and bar hangers) fully assembled for ease of installation.

Housing IC housing, .028" aluminum sealed for Air-Loc Compliance • Housing is vertically adjustable to accommodate up to a 1" ceiling thickness.

DIMENSIONS

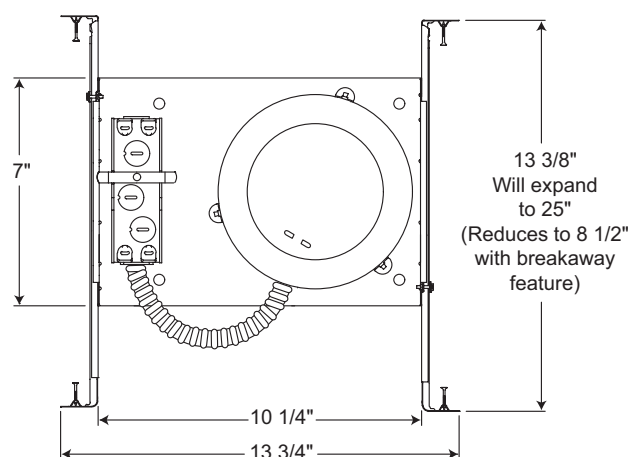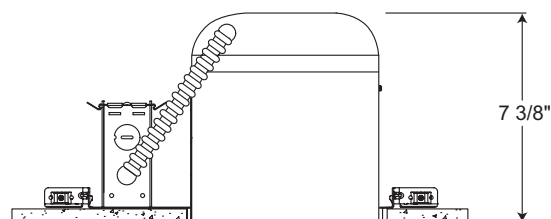

6 1/2" CEILING CUTOUT

ACCESSORIES

Catalog No.	Description
VALG6	Air-Loc Gasket Kit
G2405	T-Bar Clips (Set of 4)

To order, specify catalog number.

PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating (max.)
V6ICW	120V	A19/PAR30/PAR30L/BR30/BR40/PAR38 (See reverse for max. trim rating)

6" IC NEW CONSTRUCTION HOUSING

INCANDESCENT LAMPS

V6ICW

TRIMS/LAMPS

	Cat. No.	Description	Max. Lamp Rating
	V3024W-WH	Conical White Baffle	50W PAR30, 75W PAR30L, 65W BR30
	V3024B-WH	Conical Black Baffle	
	V3025W-WH	Straight White Baffle	50W PAR30, 50W PAR30L, 75W PAR38
	V3025B-WH	Straight Black Baffle	
	V3034W-WH◆◆	Full White Baffle	40W A19 (white only), 75W PAR30, 75W PAR30L, 65W BR30,
	V3034B-WH◆◆	Full Black Baffle	90W BR40, 75W PAR38 (black max.)
	V3034TW-WH◆◆	Full White Baffle with Torsion Springs	90W PAR38 (white only)
	V3034TB-WH◆◆	Full Black Baffle with Torsion Springs	
	V3027C-WH	Clear Cone	50W PAR30, 75W PAR30L, 65W BR30
	V3037W-WH◆◆	Full White Cone	40W A19, 75W PAR30, 75W PAR30L, 65W BR30,
	V3037TW-WH◆◆	Full White Cone with Torsion Springs	75W BR40, 90W PAR38
	V3029-WH	White Eyeball	65W BR30, 75W PAR30L
	V3040N-PW◆	Stippled Opal Lens Shower with Reflector	34W A19, 35W PAR30
	V3041-PW◆	Drop Opal Lens Shower with Reflector	40W A19
	V3050-WH	Open Frame	65W BR30

Trim Size: 7 $\frac{3}{4}$ " O.D. (except Cat. Nos. V3034N, V3037 - 7 $\frac{5}{8}$ " O.D., Cat. Nos. V3040N, V3041, V3050 - 8" O.D.).

Trim Finish: PW - Plastic White (Polycarbonate material shower trim), WH - White.

Note: In Canada when insulation is present, Type IC fixtures must be used.

◆ UL/cUL Listed for use in wet location.

◆◆ UL/cUL Listed for use in wet location with outdoor rated lamp.

Air-Loc Vulite IC housings meet IECC Energy Code requirements per ASTM E283.
Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.