

Valve Lockouts

BradyID.com/s35



Perma-Mount™ Ball Valve Lockout

- Retrofit devices are meant to stay permanently in place at the point of need
- One-time installation is easy to complete in just a few minutes
- Available in 2 sizes to fit a full range of 0.5" to 4" diameter ball valves

Catalog #	Size	Qty
121540	Small Perma-Mount Ball Valve Lockout	1
121541	Large Perma-Mount Ball Valve Lockout	1




Plug Valve Lockout

- Ideal for difficult-to-secure plug valves in compliance with OSHA standards
- Various sizes to fit most 1" to 8" dia. manually-actuated plug valves
- Durable and tamper-resistant with service temperatures from -25°F to 200°F
- Compact in size and easy to use

Catalog #	Description	Qty
113231	Lockout for up to 7/8" Stem Dia.	1
113232	Lockout for 15/16" to 1-3/8" Stem Dia.	1
113233	Lockout for 1-3/4" to 2-1/8" Stem Dia.	1
113234	Lockout for 2-3/16" to 2-1/2" Stem Dia.	1

Lockout Tagout

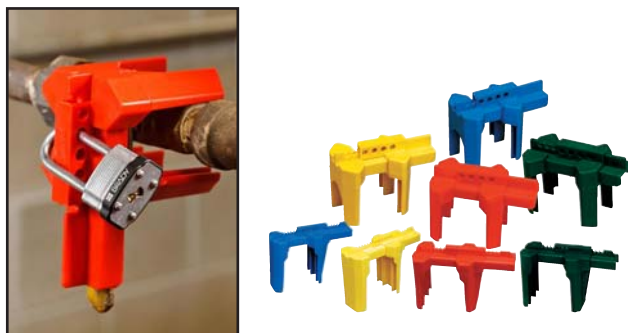

4-Legged Ball Valve Lockout

- Made from ultra-tuff polypropylene
- Small size locks out pipes 1/2" to 2-1/2" in diameter
- Small size can also lock valves OPEN on pipes from 1/2" to 1-1/4" in diameter
- Large size locks out pipes 2" to 8" in diameter

Color	Small	Large
Red	BS07A-RD	BS08A-RD
Yellow	BS07A-YW	BS08A-YW
Blue	BS07A-BU	BS08A-BU
Green	BS07A-GN	BS08A-GN



Standard Ball Valve Lockout

- Easy to use, single-piece design locks quarter-turn ball valves in OFF position
- Two sizes fit most valves up to 3"
- 65666 is made of super-tough nylon (service temp -40° to 248° F)
- 65692, 65669 and 65693 are made of powder-coated steel

Catalog #	Max Shackle Dia.	Valve Size / Pipe Dia.	Max Handle Width	Max Handle Thickness
65666	932"	1/4" to 1"	1-1/2"	3/4"
65692	38"	1/4" to 1"	1-1/2"	3/4"
65669	932"	1-1/4" to 3"	2-1/10"	1 1/4"
65693	38"	1-1/4" to 3"	1-9/10"	1 1/4"

Universal Valve Lockout

Lock Out all Types of Valves with a Single Device

- Made of rugged industrial-grade steel and nylon for extra impact and chemical resistance
- Versatile open ended clamp fits over most closed rings, wide handles
- Can also lock out large levers, T handles, and other hard-to-secure mechanical devices
- Cable attachment offers choice of 1/8" non-conductive nylon or rustproof sheathed metal cable
- Small: for handle widths up to 1" (max handle thickness 0.6")
- Large: for handle widths up to 1.6" (max handle thickness 1.1")
- Patent No. 5,415,017 and 7,207,198



Full System

Catalog #	Description	For Handle Width
51394	Small UVLO w/ 8' Sheathed Cable & Blocking Arm	Up to 1" (max thickness 0.6")
51390	Small UVLO w/ 8' Nylon Cable & Blocking Arm	Up to 1" (max thickness 0.6")
51392	Large UVLO w/ 8' Sheathed Cable & Blocking Arm	Up to 1.6" (max thickness 1.1")
51388	Large UVLO w/ 8' Nylon Cable & Blocking Arm	Up to 1.6" (max thickness 1.1")

Individual Components

Catalog #	Description	For Handle Width
50924	Small UVLO Base Clamping Unit	Up to 1" (max thickness 0.6")
50899	Large UVLO Base Clamping Unit	Up to 1.6" (max thickness 1.1")
65402	Small Blocking Arm	
65403	Large Blocking Arm	
51395	Cable Attachment w/ 8-ft Sheathed Cable	
50932	Cable Attachment w/ 8-ft Nylon Cable	

Other cable lengths also available.



Use blocking arm to lock out quarter-turn ball valves.



Attach to butterfly handles to prevent trigger handle from being squeezed.



Use cable attachment to lock out gate valves.



Use two blocking arms to lock out 3-, 4- or 5-way valves, or to lock valves in the "on", "off", or "throttled" position.