



**fitted with**

- work equipment**
- connected load**
- power consumption**
- glare-free**
- system of protection**
- class of protection**
- technology**
- usage**
- luminaire body**
- material
- surface
- colour
- lamp cover**
- weight (net)**
- mains supply**
  
- fastening**
- dimension**
- special features**

- 2 x Light-emitting diode
- light colour neutral white, 5000 K, Color Rendering Index (CRI)=65
- without
- 24 V; DC
- approx. 12 W
- without
- IP 67
- III
- switchable
- without switch
  
- aluminium
- anodised
- aluminium coloured anodised
- screen, clear
- approx. 0.5 kg
- built-in plug
- RSFM 4/0.5M
- lamp bracket (accessory), pipe clamp (accessory)
- B=391mm
- angle of radiation 50°, integrated fastening clip




RSFM 4/0.5M

**illuminance**

measuring conditions: d=50cm

E<sub>min</sub>: 71 lx  
 E<sub>m</sub>: 579 lx  
 E<sub>max</sub>: 1458 lx

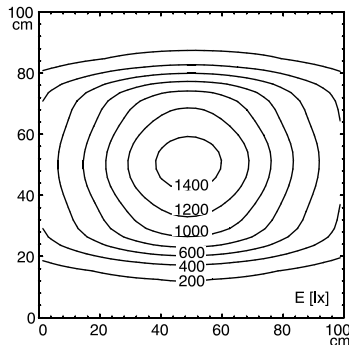

**distribution of luminous intensity**

