

KNOT WIRE WHEELS WITH NUT



Cleaning a corner weld with a bevel brush.

MADE IN USA

Knot wire wheels with a threaded nut are intended for use primarily on small and large right angle grinders. Featuring Weiler's individual knot hole construction, these radial brushes are available in heat-treated steel, Type 302 stainless steel and bronze wire for use in a wide variety of applications.

APPLICATIONS

- Removing powder-coating, epoxy-based paints, and rubberized coatings
- Weld preparation and cleaning
- Cleaning scale and heavy corrosion
- Removing heavy burrs from large pieces after cutting


P **STANDARD TWIST WHEELS** provide heavy-duty brushing action with some flexibility; ideal for deburring and demanding cleaning applications on somewhat irregular surfaces.



Dia.	Wire Size	Arbor Hole	No. of Knots	Face Width	Trim Length	Max. RPM	Std. Pack	Item Number	
								Steel	Stainless
3"	.014	3/8"-24 UNF	20	3/8"	5/8"	25,000	5	13201	13208
4"	.014	M10 x 1.25	24	1/2"	7/8"	20,000	5	13100	13107
		M10 x 1.50						13101	13108
		M14 x 2.0						13102	13109
		3/8"-24 UNF						13103	13110
		1/2"-13 UNC						13105	—
5/8"-11 UNC	13106 ■	13113 ■							
4"	.020	M10 x 1.25	24	1/2"	7/8"	20,000	5	13114	—
		M10 x 1.50						13115	—
		M14 x 2.0						13116	—
		3/8"-24 UNF						13117	—
		1/2"-13 UNC						13119	—
		5/8"-11 UNC						13120 ▲ ■	—
6"	.016 .023	5/8"-11 UNC	24	1/2"	1-3/8"	9,000	2 5	—	08346
								08106	—

■ Packaged product available. See pages 132-135 for details.

▲ Available in non-sparking bronze wire, see page 88-89 for details.

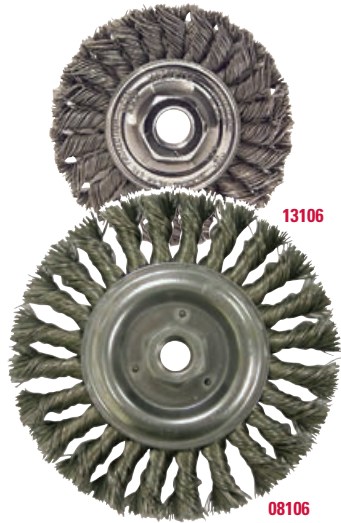

V **WOLVERINE™ STANDARD TWIST WHEELS** provide an aggressive brushing action for general purpose deburring, cleaning, and surface preparation applications.



Dia.	Wire Size	Arbor Hole	No. of Knots	Face Width	Trim Length	Max. RPM	Std. Pack	Item Number	
								Steel	Stainless
4"	.014	5/8"-11 UNC	20	1/2"	7/8"	20,000	5	36212	36213
		M10 x 1.25						36215	—
		M10 x 1.50						36216	—
		M14 x 2.0						36217	—
6"	.025	5/8"-11 UNC	24	3/4"	1-1/4"	11,000	10	36224	—



P **CABLE TWIST WHEELS** provide maximum brushing action with minimal flexibility; ideal for demanding cleaning and surface preparation applications on relatively smooth surfaces.



Dia.	Wire Size	Arbor Hole	No. of Knots	Face Width	Trim Length	Max. RPM	Std. Pack	Item Number	
								Steel	Stainless
4"	.020	M10 x 1.25	24	1/4"	7/8"	20,000	5	13261	—
		M10 x 1.50						—	13272
		5/8"-11 UNC						13266 ■	13276

■ Packaged product available. See pages 132-135 for details.



V **WOLVERINE CABLE TWIST WHEELS** provide the most aggressive brushing action for general purpose cleaning and surface preparation applications.



Dia.	Wire Size	Arbor Hole	No. of Knots	Face Width	Trim Length	Max. RPM	Std. Pack	Item Number	
								Steel	Stainless
4"	.020	5/8"-11 UNC	20	1/4"	7/8"	20,000	5	36255	—
		M10 x 1.50						36257	—
		M10 x 1.25						36258	—