

Stubby Ball End L-Wrenches

- ProGuard™ Finish -

- Fits into tight spaces standard hex keys cannot
- Eliminates the need to trim and file the short arm
- Tighter inside radius means full smooth entry into screw head
- Chamfered short arm eliminates burrs
- Ball End inserts into a screw at a 25° angle





Stubby fits where others cannot

Sets	PART#	MODEL#	PCS	LENGTH	CONTENTS	QTY	LIST
Inch	16538	SBLX10	10	Long	1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4"	1	
	16537	SBLX13	13	Long	.050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8"	1	
Metric	16592	SBLX7M	7	Long	1.5, 2, 2.5, 3, 4, 5, 6mm	1	
	16599	SBLX9M	9	Long	1.5, 2, 2.5, 3, 4, 5, 6, 8, 10mm	1	



Singles	SIZE	INCH		MM		SINGLE PACKAGING			TAGGED/BARCODED		
		INCH	MM	INCH	MM	PART#	QTY	LIST EA	PART#	QTY	LIST EA
LONG Inch	.050	2.8	72	0.14	4	26502	50		16502	5	
	1/16	3.0	76	0.16	4	26503	50		16503	5	
	5/64	3.2	81	0.27	7	26504	50		16504	5	
	3/32	3.4	86	0.29	7	26505	50		16505	5	
	7/64	3.6	90	0.30	8	26506	50		16506	5	
	1/8	3.8	95	0.32	8	26507	50		16507	5	
	9/64	4.0	101	0.33	8	26508	50		16508	5	
	5/32	4.2	107	0.35	9	26509	50		16509	5	
	3/16	4.5	114	0.39	10	26510	50		16510	5	
	7/32	4.9	124	0.46	12	26511	25		16511	2	
	1/4	5.3	133	0.46	12	26512	25		16512	2	
5/16	6.0	152	0.57	14	26513	25		16513	2		
3/8	6.8	171	0.71	18	26514	25		16514	2		
LONG Metric	1.27	2.8	72	0.14	4	26549	50		16549	5	
	1.5	3.0	77	0.19	5	26550	50		16550	5	
	2.0	3.2	82	0.27	7	26552	50		16552	5	
	2.5	3.5	88	0.28	7	26554	50		16554	5	
	3.0	3.9	98	0.32	8	26556	50		16556	5	
	4.0	4.3	110	0.35	9	26560	50		16560	5	
	5.0	4.7	119	0.40	10	26564	25		16564	2	
	6	5.5	139	0.47	12	26568	25		16568	2	
8	6.0	152	0.57	14	26572	25		16572	2		
10	6.7	171	0.78	20	26576	25		16576	2		

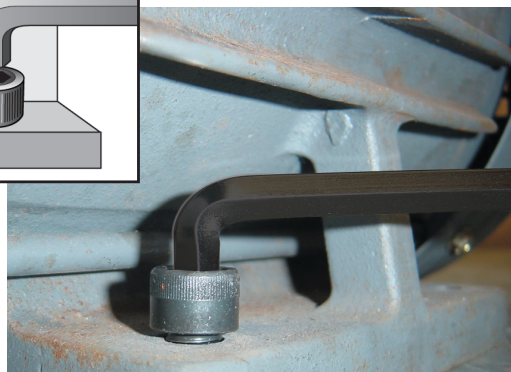

Stubby tools fit in tight spaces where there is not enough overhead clearance for a standard hex key