


Schedule 80 Conduit - Bell End

CANTEX

Meets specifications UL 651 and NEMA TC 2
 Rated for 90° C Cable
 Sunlight Resistant
 10' Lengths



**Schedule 80 Conduit
 Belled End
 10' Lengths**

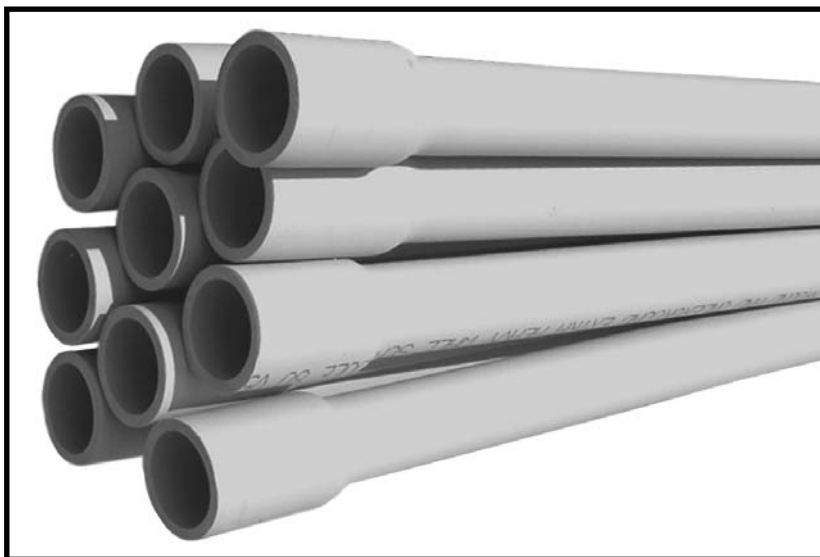

Part No.	Size	O.D.	I.D.	Min. Wall	Bell Depth	Approx. Wt/Ft	Feet per Pack
A53AE12	1/2	.840	.546	.147	1.750	.206	6,000
A53AE12H	1/2	.840	.546	.147	1.750	.206	3,000
A53AG12	3/4	1.050	.742	.154	2.000	.280	4,400
A53AG12H	3/4	1.050	.742	.154	2.000	.280	2,200
A53BA12	1	1.315	.957	.179	2.250	.412	3,600
A53BA12H	1	1.315	.957	.179	2.250	.412	1,800
A53BC12	1-1/4	1.660	1.278	.191	2.500	.571	3,300
A53BC12H	1-1/4	1.660	1.278	.191	2.500	.571	1,650
A53BE12	1-1/2	1.900	1.500	.200	2.750	.692	2,250
A53BE12H	1-1/2	1.900	1.500	.200	2.750	.692	1,130
A53CA12	2	2.375	1.939	.218	3.250	.959	1,400
A53CE12	2-1/2	2.875	2.323	.276	3.500	1.463	930
A53DA12	3	3.500	2.900	.300	4.000	1.959	880
A53EA12	4	4.500	3.826	.337	4.750	2.863	570
A53FA12	5	5.563	4.813	.375	5.750	3.975	380
A53GA12	6	6.625	5.761	.432	6.325	5.464	260

Note: 20' length available on request