

## RIGID • IMC

Steel Bushing for Rigid Conduit • IMC • EMT



### Applications

Eliminates the use of the locknut and solves the problem of not enough thread left to engage the bushing after installing the locknut

### Features

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes
- RoHS compliant

### Standard Materials

Body - Steel  
Insuliner - PEI 1000 rated at 150° C


### Standard Finish

Body - Zinc plated

### Applicable Third Party Standards

- UL Listed File # E207875

U.S. Patent No. 7.635.816

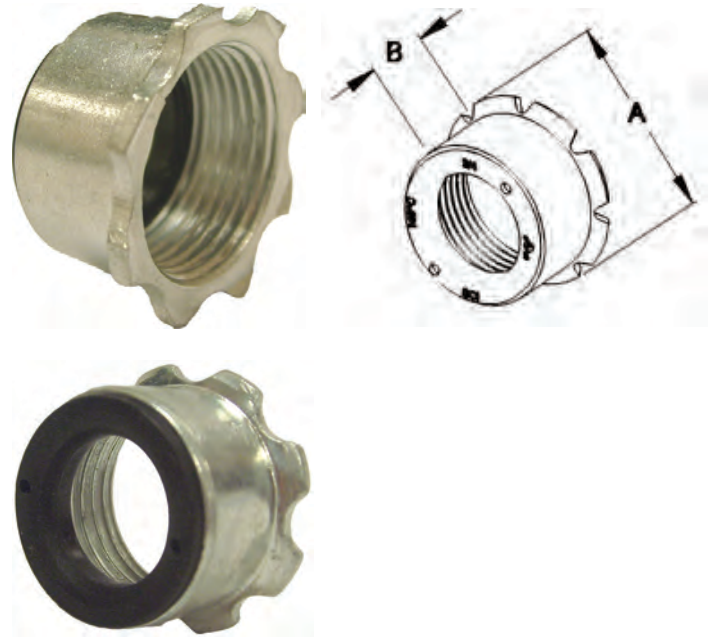

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	MASTER PACK	WEIGHT PER C
BRC-50STKON	1/2"	1.125	0.625	50	3.0
BRC-75STKON	3/4"	1.438	0.688	50	3.5
BRC-100STKON	1"	1.750	0.813	50	5.4

