

CONDUIT BODIES • COVERS • GASKETS

Aluminum Die Cast Threaded LR Conduit Bodies for Rigid • IMC conduit



Applications

To provide access to conductors for pulling, splicing and maintenance

Features


- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet location

Standard Materials



- Die cast aluminum
- Copper free
- Covers - Stamped aluminum
- Gasket - Neoprene rubber

Applicable Third Party Standards

- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA: FB-1
- UL Listed File # E208392



ALRKON

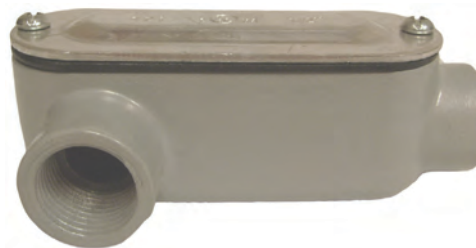

ALR-CGKON

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	INNER PACK	MASTER PACK	WEIGHT PER C
Aluminum Die Cast Threaded LR Conduit Bodies for Rigid • IMC conduit							
ALR1KON	1/2"	4.313	2.063	13.375	10	100	22.7
ALR2KON	3/4"	5.063	2.250	1.625	10	50	37.5
ALR3KON	1"	5.875	2.625	1.875	5	25	48.7
ALR4KON	1-1/4"	7.813	3.625	2.500	2	10	98.1
ALR5KON	1-1/2"	7.813	3.625	2.500	2	10	93.9
ALR6KON	2"	10.063	4.438	3.375	1	5	253.5
ALR7KON	2-1/2"	12.813	5.750	4.000	-	1	366.2
ALR8KON	3"	12.813	5.750	4.500	-	1	406.3
ALR9KON	3-1/2"	15.625	7.688	5.625	-	1	928.1
ALR10KON	4"	15.625	7.688	5.625	-	1	901.7
Aluminum Die Cast Threaded LR Conduit Bodies with Stamped Aluminum Cover & Neoprene Gasket							
ALR1CGKON	1/2"	4.313	2.063	1.625	10	100	28.9
ALR2CGKON	3/4"	5.063	2.250	1.875	10	50	44.9
ALR3CGKON	1"	5.875	2.625	2.125	5	25	58.7
ALR4CGKON	1-1/4"	7.938	3.625	2.750	2	10	117.2
ALR5CGKON	1-1/2"	7.938	3.625	2.750	2	10	113.0
ALR6CGKON	2"	10.063	4.438	3.625	1	5	285.8
ALR7CGKON	2-1/2"	12.813	5.750	4.250	-	1	427.9
ALR8CGKON	3"	12.813	5.750	4.750	-	1	468.0
ALR9CGKON	3-1/2"	15.625	7.688	5.875	-	1	1051.3
ALR10CGKON	4"	15.625	7.688	5.875	-	1	1024.9