

## CONDUIT BODIES • COVERS • GASKETS

Rigid MT and MTB Conduit Bodies, Malleable Iron for Rigid • IMC conduit



### Applications

To provide access to conductors for pulling, splicing and maintenance

### Features

- Tapered threaded hubs - NPT
- Suitable for use in concrete

### Standard Materials

Malleable iron

### Standard Finish


Zinc plated with aluminum enamel paint

### Applicable Third Party Standards


- UL Standard: 514A
- Fed. Spec. W-C-586D
- NEMA: FB-1
- UL Listed File # E208392



MTKON

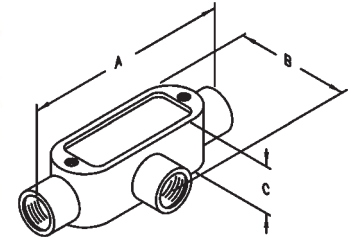

MTBKON



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MASTER PACK	WEIGHT PER C
Threaded MT Conduit Bodies						
MT1KON	1/2"	5.625	2.063	1.313	10	122.4
MT2KON	3/4"	6.000	2.250	1.500	10	152.6
MT3KON	1"	7.063	2.625	1.813	5	218.4
MT4KON	1-1/4"	9.000	2.750	2.625	5	369.0
MT5KON	1-1/2"	9.000	3.500	2.625	5	405.8
MT6KON	2"	11.500	4.125	3.125	5	723.9
MT7KON	2-1/2"	15.000	5.688	4.313	1	1377.1
MT8KON	3"	15.125	5.875	4.313	1	1609.5
MT9KON	3-1/2"	18.125	6.813	4.875	1	2708.7
MT10KON	4"	18.125	8.188	4.875	1	2708.7
Threaded TB Conduit Bodies						
MTB1KON	1/2"	5.375	2.063	1.313	10	100.3
MTB2KON	3/4"	6.000	2.250	1.500	10	135.3
MTB3KON	1"	7.063	2.625	1.813	5	219.3
MTB4KON	1-1/4"	9.000	2.750	2.625	5	380.1
MTB5KON	1-1/2"	9.000	3.500	2.625	5	457.4
MTB6KON	2"	11.500	4.125	3.125	5	751.5