



LIQUIDTIGHT

90° Malleable Liquidtight Fittings - Insulated with Copper Grounding Lugs

Features

- Tapered threaded male hub - NPT
- Compact, slim diameter
- Steel locknut
- Liquidtight/Raintight/Oiltight/Concrete tight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS compliant

Standard Materials

- Lug - Copper
- Malleable iron
- Nylon
- Steel ferrule
- Steel locknut

Standard Finish


- Zinc plated

Applicable Third Party Standards

- UL Standard:514B
- UL Standard: 467
- Fed. Spec. W-F-408E
- NEMA: FB-1
- Suitable for grounding in size 3/8" through 1-1/4" under NEC 350.60 and 250.118(6)
- UL Listed File # E212551



Insulated

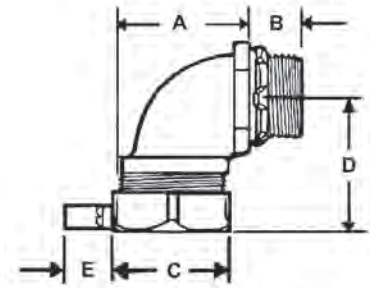

CATALOG NUMBER	TRADE SIZE	LUG SIZE	DIM A	DIM B	DIM C	DIM D	MASTER PACK	WEIGHT PER C
90° Insulated								
LT3890CL-ICKON	3/8"	4-14	1.250	0.625	1.188	1.5630	25	27.8
LT5090CL-ICKON	1/2"	4-14	1.438	0.625	1.313	1.5630	25	31.4
LT7590CL-ICKON	3/4"	4-14	2.000	0.625	1.563	1.8130	10	46.7
LT10090CL-ICKON	1"	4-14	2.125	0.688	1.875	2.1880	10	77.4
LT12590CL-ICKON	1.25"	4-14	2.875	0.750	2.250	2.1880	5	99.2
LT15090CL-ICKON	1.2"	4-14	2.688	0.813	2.500	2.5000	2	124.7
LT20090CL-ICKON	2"	4-14	3.188	0.813	3.000	2.8750	1	180.3
LT25090CL-ICKON	2.5"	1/0-8	8.313	1.125	4.063	7.8750	1	855
LT30090CL-ICKON	3"	1/0-8	9.500	1.250	4.875	9.5000	1	1255.8
LT35090CL-ICKON	3.5"	3/0-6	11.438	1.250	5.438	11.8750	1	1932.7
LT40090CL-ICKON	4"	3/0-6	13.813	1.313	6.063	12.9380	1	2422.5