

LIQUIDTIGHT

Malleable Liquidtight Fittings - Insulated with Copper Grounding Lug for use with Liquidtight Flexible Metallic Conduit • Malleable Iron



Features

- Tapered threaded male hub - NPT
- Compact, slim diameter
- Steel locknut
- Liquidtight/Raintight/Oiltight/Concrete tight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS compliant

Standard Materials


- Lug - Copper
- Malleable iron
- Nylon
- Steel ferrule
- Steel locknut

Standard Finish

Zinc plated

Applicable Third Party Standards

- UL Standard: 514B
- UL Standard: 467
- Fed. Spec. W-F-408E
- NEMA: FB-1
- UL Listed File # E212551

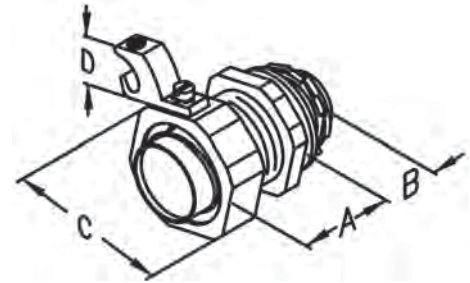

Insulated

| CATALOG NUMBER | TRADE SIZE | LUG SIZE | DIM A | DIM B | DIM C | DIM D | MASTER PACK | WEIGHT PER C |
|----------------|------------|----------|-------|-------|-------|-------|-------------|--------------|
| Insulated | | | | | | | | |
| LT38CL-ICKON | 3/8" | 4-14 | 0.94 | 0.63 | 1.38 | 0.75 | 25 | 17.6 |
| LT50CL-ICKON | 1/2" | 4-14 | 0.94 | 0.63 | 1.31 | 0.75 | 25 | 19.8 |
| LT75CL-ICKON | 3/4" | 4-14 | 1.06 | 0.63 | 1.56 | 0.75 | 25 | 30.9 |
| LT100CL-ICKON | 1" | 4-14 | 1.13 | 0.75 | 1.88 | 0.75 | 5 | 41.9 |
| LT125CL-ICKON | 1-1/4" | 4-14 | 1.25 | 0.75 | 2.25 | 0.75 | 5 | 57.3 |
| LT150CL-ICKON | 1-1/2" | 4-14 | 1.19 | 0.75 | 2.50 | 0.75 | 2 | 72.8 |
| LT200CL-ICKON | 2" | 4-14 | 1.44 | 0.81 | 3.00 | 0.75 | 1 | 101.4 |
| LT250CL-ICKON | 2-1/2" | 1/0-8 | 2.19 | 1.06 | 4.06 | 1.13 | 1 | 372.6 |
| LT300CL-ICKON | 3" | 1/0-8 | 2.50 | 1.25 | 4.88 | 1.13 | 1 | 465.2 |
| LT350CL-ICKON | 3-1/2" | 3/0-6 | 2.69 | 1.31 | 5.44 | 1.50 | 1 | 685.6 |
| LT400CL-ICKON | 4" | 3/0-6 | 3.00 | 1.38 | 6.06 | 1.50 | 1 | 806.9 |