

LIQUIDTIGHT

Malleable Liquidtight Fittings - Non-Insulated and Insulated with Aluminum Grounding Lug



Features

- Tapered threaded male hub - NPT
- Compact, slim diameter
- Steel locknut
- Liquidtight/Raintight/Oiltight/Concrete tight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS compliant

Standard Materials


- Lug - Aluminum
- Malleable iron
- Nylon
- Steel ferrule
- Steel locknut

Standard Finish


- Zinc plated

Applicable Third Party Standards

- UL Standard: 514B
- Fed. Spec. W-F-408E
- NEMA: FB-1
- UL Listed File # E212551

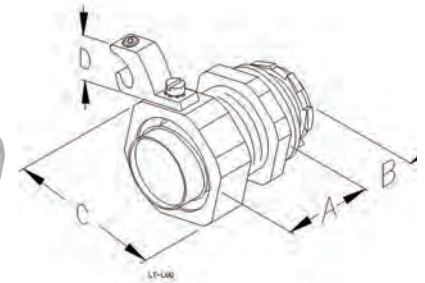

Non-Insulated

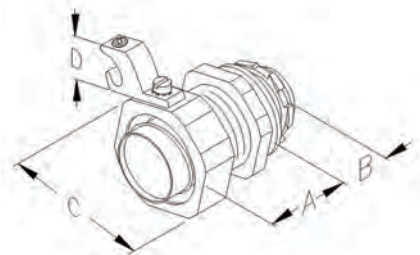

Insulated

LIQUIDTIGHT

CATALOG NUMBER	TRADE SIZE	LUG SIZE	DIM A	DIM B	DIM C	DIM D	MASTER PACK	WEIGHT PER C
Non-Insulated								
LT38ALKON	3/8"	4-14	0.940	0.560	1.190	N/A	25	15.4
LT50ALKON	1/2"	4-14	0.940	0.630	1.310	N/A	25	17.6
LT75ALKON	3/4"	4-14	1.060	0.560	1.560	N/A	10	28.7
LT100ALKON	1"	4-14	1.130	0.690	1.880	N/A	10	39.7
LT125ALKON	1-1/4"	4-14	1.250	0.690	2.250	N/A	5	55.1
LT150ALKON	1-1/2"	4-14	1.380	0.690	2.500	N/A	2	70.5
LT200ALKON	2"	4-14	1.440	0.750	3.000	N/A	1	99.2
LT250ALKON	2-1/2"	1/0-8	2.190	1.060	4.060	N/A	1	363.8
LT300ALKON	3"	1/0-8	2.500	1.130	4.880	N/A	1	456.4
LT350ALKON	3-1/2"	3/0-6	2.690	1.190	5.440	N/A	1	668.0
LT400ALKON	4"	3/0-6	3.000	1.250	6.060	N/A	1	789.2
Insulated								
LT38AL-ICKON	3/8"	4-14	0.938	0.625	1.188	0.750	25	17.6
LT50AL-ICKON	1/2"	4-14	0.938	0.625	1.375	0.750	25	19.8
LT75AL-ICKON	3/4"	4-14	1.063	0.625	1.563	0.750	10	30.9
LT100AL-ICKON	1"	4-14	1.125	0.750	1.875	0.750	10	41.9
LT125AL-ICKON	1-1/4"	4-14	1.250	0.750	2.250	0.750	5	57.3
LT150AL-ICKON	1-1/2"	4-14	1.750	0.750	2.500	0.750	2	72.8
LT200AL-ICKON	2"	4-14	1.438	0.750	3.000	0.750	1	101.4
LT250AL-ICKON	2-1/2"	1/0-8	2.188	1.063	4.063	1.125	1	372.6
LT300AL-ICKON	3"	1/0-8	2.500	1.250	4.875	1.125	1	465.2
LT350AL-ICKON	3-1/2"	3/0-6	2.688	1.313	5.438	1.500	1	685.6
LT400AL-ICKON	4"	3/0-6	3.000	1.375	6.063	1.500	1	806.9