

LIQUIDTIGHT

Malleable Liquidtight Fittings - Insulated with Copper Grounding Lug for use with Liquidtight Flexible Metallic Conduit • Malleable Iron



Features

- Tapered threaded male hub - NPT
- Compact, slim diameter
- Steel locknut
- Liquidtight/Raintight/Oiltight/Concrete tight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS compliant

Standard Materials


- Lug - Copper
- Malleable iron
- Nylon
- Steel ferrule
- Steel locknut

Standard Finish

Zinc plated

Applicable Third Party Standards

- UL Standard: 514B
- UL Standard: 467
- Fed. Spec. W-F-408E
- NEMA: FB-1
- UL Listed File # E212551

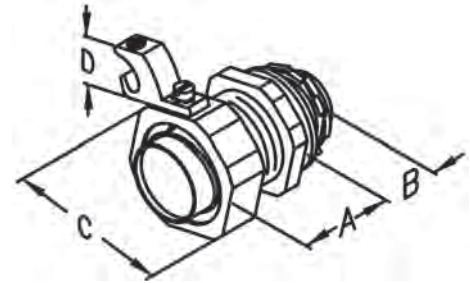

Insulated

CATALOG NUMBER	TRADE SIZE	LUG SIZE	DIM A	DIM B	DIM C	DIM D	MASTER PACK	WEIGHT PER C
Insulated								
LT38CL-ICKON	3/8"	4-14	0.94	0.63	1.38	0.75	25	17.6
LT50CL-ICKON	1/2"	4-14	0.94	0.63	1.31	0.75	25	19.8
LT75CL-ICKON	3/4"	4-14	1.06	0.63	1.56	0.75	25	30.9
LT100CL-ICKON	1"	4-14	1.13	0.75	1.88	0.75	5	41.9
LT125CL-ICKON	1-1/4"	4-14	1.25	0.75	2.25	0.75	5	57.3
LT150CL-ICKON	1-1/2"	4-14	1.19	0.75	2.50	0.75	2	72.8
LT200CL-ICKON	2"	4-14	1.44	0.81	3.00	0.75	1	101.4
LT250CL-ICKON	2-1/2"	1/0-8	2.19	1.06	4.06	1.13	1	372.6
LT300CL-ICKON	3"	1/0-8	2.50	1.25	4.88	1.13	1	465.2
LT350CL-ICKON	3-1/2"	3/0-6	2.69	1.31	5.44	1.50	1	685.6
LT400CL-ICKON	4"	3/0-6	3.00	1.38	6.06	1.50	1	806.9