



# RIGID • IMC

## Conduit Hubs with Insulated Throats for Threaded Rigid Conduit • IMC

### Features

- Male hub thread - NPT
- Female thread for Rigid conduit and IMC - NPT
- Recessed o-ring seal assures watertight and dust tight connections
- Type NHUB with insulated throat and bonding locknut is suitable for service entrance application
- RoHS compliant

### Standard Materials


Malleable iron

### Standard Finish

Zinc plated

### Applicable Third Party Standards

- UL Standard: 514B
- Fed. Spec. W-F-408E
- NEMA: FB-1
- UL Listed File # E207875

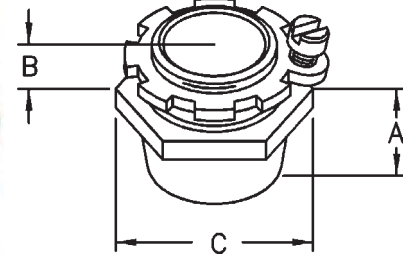

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MASTER PACK	WEIGHT PER C
NHUB50-ICKON	1/2"	0.813	0.625	1.500	25	18.2
NHUB75-ICKON	3/4"	0.938	0.625	1.813	25	25.1
NHUB100-ICKON	1"	1.063	0.750	2.063	5	38.9
NHUB125-ICKON	1-1/4"	1.250	0.750	2.313	5	54.4
NHUB150-ICKON	1-1/2"	1.250	0.813	3.125	2	63.6
NHUB200-ICKON	2"	1.250	0.813	3.563	1	97.7
NHUB250-ICKON	2-1/2"	1.625	1.188	4.125	1	195.5
NHUB300-ICKON	3"	1.750	1.250	4.938	1	282.1
NHUB350-ICKON	3-1/2"	1.813	1.313	5.750	1	350.9
NHUB400-ICKON	4"	1.938	1.375	6.188	1	395.3
NHUB500-ICKON	5"	2.063	1.438	7.438	1	717.4
NHUB600-ICKON	6"	2.125	1.563	8.813	1	888.4