




Standard Pulling Grips

Patent No. 3,122,806

Models B, C & D


The following Lewis pulling grips are available in triple weave configuration and are made of High-Fatigue Aircraft Strand steel cable that is coated with a UV resistant plastic coating. This plastic coating increases the life of the grip, provides a bearing surface on underground pulls and increases the ease and SAFETY of installation and removal for workmen. The Pulling Eye on these Standard Pulling Grips is covered with Aluminum Tubing for a more durable attachment point. Eye can also be ordered with our exclusive Patented, Flexible, Stress relieving, plastic tubing eye for use in less abrasive inner conduit pulls. Copper tabs on tail end of grip add reinforcement to tail end of grip strands and ensure quick loading of product to be pulled.

Model B Triple Weave – 1 1/4" to 2"

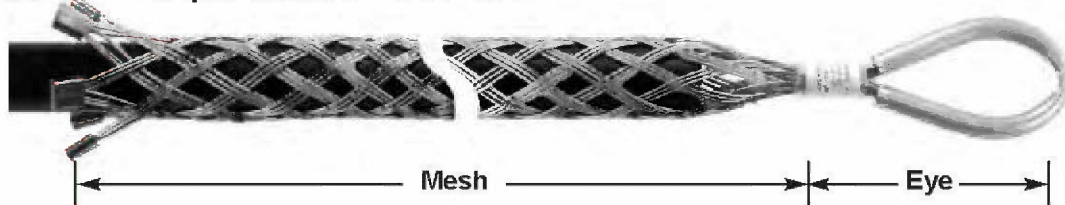


Part No.	Size Range	Work Load	Approx. Brk. Stgth.	Weight	Weave	Mesh Length	Eye
B-TW-26	1 1/4" - 2"	2,500 lbs.	7,500 lbs.	1 lb., 1 oz.	Triple	26"	3 1/4"
B-TW-32	1 1/4" - 2"	3,500 lbs.	10,500 lbs.	1 lb., 1 oz.	Triple	32"	3 1/4"

Model C Triple Weave – 2" to 2 3/4"

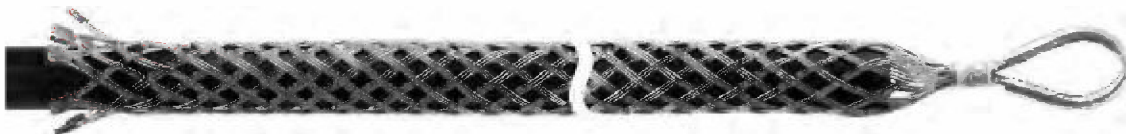

Part No.	Size Range	Work Load	Approx. Brk. Stgth.	Weight	Weave	Mesh Length	Eye
C-TW-32	2" - 2 3/4"	3,500 lbs.	10,500 lbs.	1 lb., 4 oz.	Triple	32"	3 1/2"
C-TW-38	2" - 2 3/4"	4,500 lbs.	13,500 lbs.	1 lb., 11 oz.	Triple	38"	3 1/2"

Model D Triple Weave – 2 3/4" to 3 1/2"

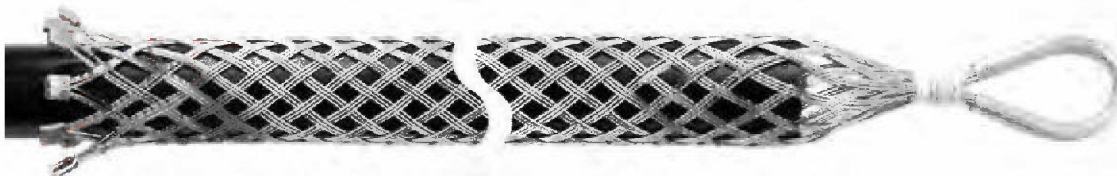

Part No.	Size Range	Work Load	Approx. Brk. Stgth.	Weight	Weave	Mesh Length	Eye
D-TW-38	2 3/4" - 3 1/2"	4,500 lbs.	13,500 lbs.	1 lb., 12 oz.	Triple	38"	3 3/4"
D-TW-46	2 3/4" - 3 1/2"	5,500 lbs.	16,500 lbs.	2 lb., 2 oz.	Triple	46"	3 3/4"