

Modular Enclosures For Flange-Mounted Disconnects

Application -

Can be bolted together in any desired multiple door arrangement for maximum versatility. Slave enclosures can be added or removed as required.

Designed to house most standard type disconnect. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.125" carbon steel.
- Seams continuously welded and ground smooth.
- Body stiffeners for extra rigidity.
- Door and side openings are flanged to provide extra strength and smooth edges.
- Flange trough collar around all sides of door opening.
- Heavy duty lifting eyes anchor into reinforced top.
- Concealed hinges.
- Removable and interchangeable doors.
- Black zinc die cast coinproof/padlocking handle on main door of disconnect enclosures. Black zinc die cast padlocking handle on all other doors.
- 3-point latching mechanism.
- Ramp shoes on ends of latch rods for easier door closing.
- Panel supports.
- Large removable print pockets.
- Oil-resistant door gasket.
- Removable panels mount on collar studs.
- Mechanical interlock standard on each enclosure. Parts required to connect interlock system between adjacent enclosures are provided.
- Hole plugs provided to seal holes in bottom of enclosure.
- Ground stud on door and body
- Provisions for light kit.

Finish -

ANSI-61 gray powder coated inside and out. Sub-panels powder coated white.

Note -

- Disconnect ordered separately.
- SCE-MODGK sold separately, required when bolting one enclosure to another.

IS3 - Industry Standards -
 NEMA Type 3R, 12 & Type 13
 UL Listed Type 3R & 12
 CSA Type 3R & 12
 IEC 60529 IP55

***Special Instructions apply for IS3, IS4 and IS6 to maintain the environmental rating of Type 3R for these parts. See the Special Instructions on the Industry Standards page in the Technical Information Section.

MODULAR ENCLOSURES SINGLE-DOOR DISCONNECT ENCLOSURE (LEFT SIDE OPEN)

ENCLOSURE PRODUCT CODE A2						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard		Catalog No.	Panel Height (D)	Panel Width (E)	Panel
SCE-MOD72X4018	72.00	40.00	18.00	IS3	1,693.58	SCE-64P37*	60.00	33.75	Included
SCE-MOD84X4018	84.00	40.00	18.00	IS3	1,883.48	SCE-76P37*	72.00	33.75	Included
SCE-MOD84X4018G	84.00	40.00	18.00	IS3	1,883.48	SCE-76P37GALV*	72.00	33.75	Included
SCE-MOD84X4024	84.00	40.00	24.00	IS3	2,054.27	SCE-76P37*	72.00	33.75	Included

TWO-DOOR DISCONNECT ENCLOSURE (LEFT SIDE OPEN)

ENCLOSURE PRODUCT CODE A2						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard		Catalog No.	Panel Height (D)	Panel Width (E)	Panel
SCE-MOD72X7818	72.00	78.00	18.00	IS3		SCE-64P76*	60.00	72.00	
SCE-MOD84X7818	84.00	78.00	18.00	IS3		SCE-76P76*	72.00	72.00	
SCE-MOD84X7818G	84.00	78.00	18.00	IS3		SCE-76P76GALV*	72.00	72.00	
SCE-MOD84X7824	84.00	78.00	24.00	IS3		SCE-76P76*	72.00	72.00	
SCE-MOD84X7824G	84.00	78.00	24.00	IS3		SCE-76P76GALV*	72.00	72.00	


SINGLE-DOOR SLAVE ENCLOSURE (BOTH SIDES OPEN)

ENCLOSURE PRODUCT CODE A2						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard		Catalog No.	Panel Height (D)	Panel Width (E)	Panel
SCE-MOD724018	72.00	40.00	18.00	IS3		SCE-64P37*	60.00	33.75	
SCE-MOD724018G	72.00	40.00	18.00	IS3		SCE-64P37GALV*	60.00	33.75	
SCE-MOD844018	84.00	40.00	18.00	IS3		SCE-76P37*	72.00	33.75	
SCE-MOD844018G	84.00	40.00	18.00	IS3		SCE-76P37GALV*	72.00	33.75	
SCE-MOD844024	84.00	40.00	24.00	IS3		SCE-76P37*	72.00	33.75	

TWO-DOOR SLAVE ENCLOSURE (BOTH SIDES OPEN)

ENCLOSURE PRODUCT CODE A2						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard		Catalog No.	Panel Height (D)	Panel Width (E)	Panel
SCE-MOD727718	72.00	77.00	18.00	IS3		SCE-64P76*	60.00	72.00	
SCE-MOD847718	84.00	77.00	18.00	IS3		SCE-76P76*	72.00	72.00	
SCE-MOD847718G	84.00	77.00	18.00	IS3		SCE-76P76GALV*	72.00	72.00	
SCE-MOD847724	84.00	77.00	24.00	IS3		SCE-76P76*	72.00	72.00	
SCE-MOD847724G	84.00	77.00	24.00	IS3		SCE-76P76GALV*	72.00	72.00	

* Sub-panel included with enclosure. Replacement plates can be ordered. Prices found in the accessory section. Part numbers ending in "G" have galvanized sub-panels installed.

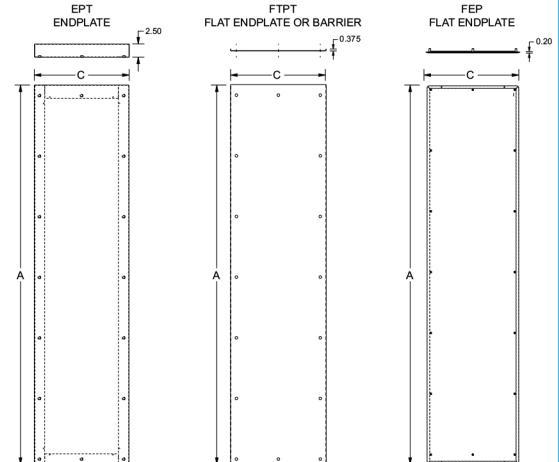

1 Operator System Enclosures
 2 Wall-Mount Enclosures
 3 Free-Standing & Floor-Mounted Enclosures
 4 Modular Enclosures
 5 Operator System Enclosures (Stainless Steel)
 6 Wall-Mount Enclosures (Stainless Steel)
 7 Free-Standing & Floor-Mounted Enclosures (Stainless Steel)
 8 Non-Metallic Enclosures
 9 Accessories
 10 Technical Information
 11 Index