

ENVIRO-THERM® THERMAL MANAGEMENT

Air Conditioners

Enviro-Therm® Air Conditioners are designed with an internal closed loop system to provide protection from dust, oil and water. For indoor and outdoor application. Rugged, energy efficient, and reliable cooling system. For more details and Installation Information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- Heavy gauge steel/stainless steel.
- Internal components are corrosion resistant.
- Coils are designed as filterless units, fin spacing and hydrophobic Nano coating to help reduce chance of clogging.
- Washable, Reusable 8 layer aluminum mesh filters included.
- Captive screw fastened filter cover.
- Compressor Heater.
- Enclosure Heater for low ambient temperatures.
- Easy Mounting Flange hangers for installation included.
- High temp alarm.
- High performance ball bearing fans.
- Door activated switch wiring provisions.
- Cage clamp terminal connector.
- Oil and water resistant gaskets installed.

Electrical -

- cULus Listed
- CE
- Surge protected and EMI compliant - IEC61000 and CE requirement

Finish -

Powder coated steel cover RAL 7035 River Texture over Aluzinc coated steel.
SS units: #4 brushed finish 304 Stainless Steel cover and frame.
SS6 units: #4 brushed finish 316 Stainless Steel cover.

IS19 - Industry Standards -

UL Recognized Type 3, 3R, 4 & 12
IEC 60529 IP56

IS20 - Industry Standards -

UL Recognized Type 3, 3R, 4, 4X & 12
IEC 60529 IP56



AIR CONDITIONER PRODUCT CODE P1


Catalog No.	BTU 95°F @ 95°F	Enclosure Heating Capacity (W)	Hz	Voltage	Line Amps	Startup Amps	Industry Standard
SCE-AC1000B120V	1000	150 W	60	120V	2.4	8.00	IS19
SCE-AC1000B230V	1000	150 W	50/60	230V	1.5	8.00	IS19

Stainless Steel Type 304

SCE-AC1000B120VSS	1000	150 W	60	120V	2.4	8.00	IS20
SCE-AC1000B230VSS	1000	150 W	50/60	230V	1.5	8.00	IS20

Stainless Steel Type 316

SCE-AC1000B120VSS6	1000	150 W	60	120V	2.4	8.00	IS20
SCE-AC1000B230VSS6	1000	150 W	50/60	230V	1.5	8.00	IS20

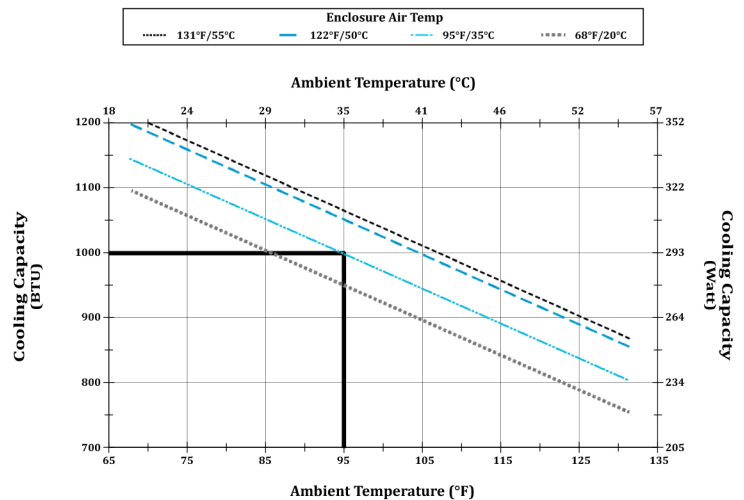

Phone (989) 799-6871
Fax (989) 799-4524

