


| Catalog No. | Height (A) | Width (B) | Depth (C) | Cutout Size (F) | Cutout Size (G) | CFM | Product Code |
|------------------|------------|-----------|-----------|-----------------|-----------------|---------|--------------|
| SCE-FA44 | 6.11 | 7.38 | 3.28 | 5.66 | 5.91 | 63/75 | P1 |
| SCE-FA66 | 7.61 | 8.88 | 3.75 | 7.16 | 7.41 | 135/158 | P1 |
| SCE-FA1010 | 11.62 | 12.88 | 5.25 | 11.16 | 11.41 | 400/440 | P1 |
| SCE-FA44-230 | 6.11 | 7.38 | 3.28 | 5.66 | 5.91 | 63/75 | P1 |
| SCE-FA66-230 | 7.61 | 8.88 | 3.75 | 7.16 | 7.41 | 135/158 | P1 |
| SCE-FA1010-230 | 11.62 | 12.88 | 5.25 | 11.16 | 11.41 | 400/440 | P1 |
| SCE-FA66-24VDC | 7.61 | 8.88 | 3.75 | 7.16 | 7.41 | 155 | P1 |
| SCE-FA1010-24VDC | 11.62 | 12.88 | 5.25 | 11.16 | 11.41 | 425 | P1 |




| Catalog No. | Height (A) | Width (B) | Cutout Size (F) | Cutout Size (G) | Product Code |
|-------------|------------|-----------|-----------------|-----------------|--------------|
| SCE-FGA44 | 6.11 | 7.38 | 5.66 | 5.91 | P1 |
| SCE-FGA66 | 7.61 | 8.88 | 7.16 | 7.41 | P1 |
| SCE-FGA1010 | 11.62 | 12.88 | 11.16 | 11.41 | P1 |

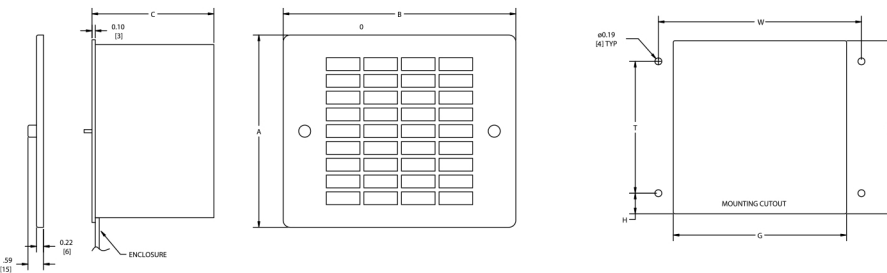

| Catalog No. | Height (A) | Width (B) | Depth (C) | Finish | Product Code |
|---------------|------------|-----------|-----------|--------------|--------------|
| SCE-RH44 | 8.09 | 7.62 | 4.50 | ANSI-61 Gray | P1 |
| SCE-RH66 | 8.46 | 9.24 | 4.56 | ANSI-61 Gray | P1 |
| SCE-RH1010 | 12.34 | 13.12 | 4.50 | ANSI-61 Gray | P1 |
| SCE-RH66-05 | 8.46 | 9.24 | 4.56 | SCE-05 White | P1 |
| SCE-RH1010-05 | 12.34 | 13.12 | 4.50 | SCE-05 White | P1 |

Stainless Steel

| | | | | | |
|--------------|-------|-------|------|-------------------|----|
| SCE-RH44SS | 8.09 | 7.62 | 4.50 | #4 Brushed Finish | P1 |
| SCE-RH66SS | 8.46 | 9.24 | 4.56 | #4 Brushed Finish | P1 |
| SCE-RH1010SS | 12.34 | 13.12 | 4.50 | #4 Brushed Finish | P1 |

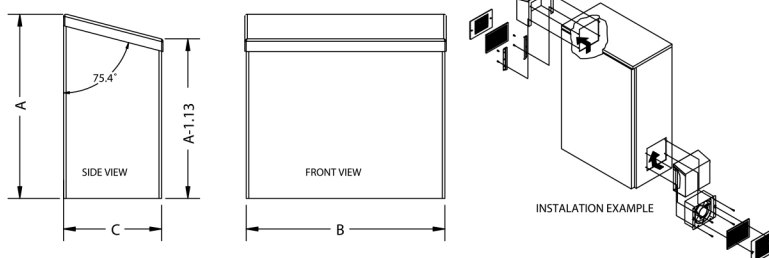

ENVIRO-THERM® THERMAL MANAGEMENT

Fan Package

Designed for use in enclosures that require cooling but have limited space. Consists of a washable aluminum filter, steel air plenum, removable stainless steel grille, single phase fan, and approximately 14 inches of lead wire. Grille has captivated thumb nuts for easy access to the filter from the outside. Fans are available in 115 or 230 volt AC or 24 volt DC, 50/60 Hertz (Hz) single phase. Air plenum is ANSI-61 gray powder coated. For installation information, please consult our Installation Manual at www.saginawcontrol.com. UL listed motor.

IS24 - Industry Standards
UL Component Recognized

Filter and Grille Package

Designed for use on air discharge side of cooling fan package. Stainless steel grille with captivated thumb screws. Aluminum mounting brackets and aluminum filter. Mounting hardware is furnished.

Rain Hood

Designed for use with standard fan and filter kits to prevent rain, sleet, snow, dropping water or fluids from being drawn into the enclosure. Made of heavy gauge galvanized steel and powder coated. "SS" kits are made of Type 304 stainless steel with #4 brushed finish. UL Recognized. For installation information, please consult our Installation Manual at www.saginawcontrol.com.

Note: Fan and Filter Kit are sold separately.

UL Recognized Type 3R