



## Thank You for Choosing the Energizer® Family Charger

Please read this manual before you use the charger, and save it for reference.

**Batteries:** Nickel Metal Hydride (NiMH)  
Rechargeable batteries

**Sizes:** AA, AAA, C, D, 9V



**Recommended :** Energizer® NiMH Batteries

**Model :** CHFC

### CHARGING


1. Load batteries into charger.

- Open lid and place batteries in charger, matching the polarity marks (+ and -).

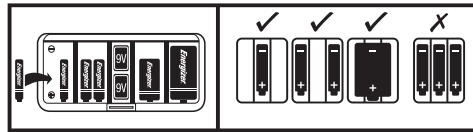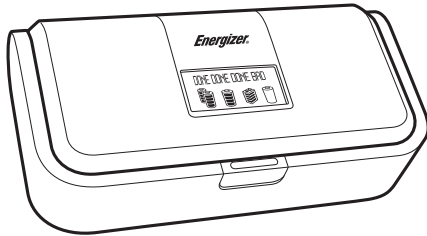

- Close the lid, which moves the charger contacts into place for charging.

2. Plug transformer into a standard AC outlet.

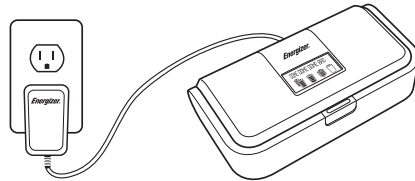

3. Charge

CHARGING	DONE	BAD
Battery icons blinking, adding bars over time.	Battery icon changed to solid color battery.	Outlined blinking battery icon.

- Unplug charger when charging is complete.  
(Safety Feature: Power to contacts is disabled when lid is opened.)

### WARNING

To avoid personal injury and property damage from, but not limited to, the risk of electric shock or fire:

- Charge only Nickel Metal Hydride (NiMH) rechargeable batteries. Charging any other types of batteries may cause them to leak, rupture or explode.
- Do not open battery, dispose of in fire, put in backwards, mix with used or other battery types or short circuit – may ignite, explode, leak or get hot causing injury.
- Use the charger only in dry locations. Keep away from rain, snow or excessive moisture.
- Never plug battery chargers into an extension cord.
- Do not operate the charger if damaged.
- Do not disassemble, modify any part of the charger, or attempt to use the charger as a power source.
- Unplug before attempting maintenance or cleaning.

### CHARGING TIMES

Battery Size (NiMH)	Rated Capacity (mAh)	Number of Batteries	Estimated Charging Time
AA	2500	1-4*	3 hr
	2500	5-8	6 hr
	2000	1-4*	2 hr
AAA	900	1-4*	3 hr
	900	5-8	6 hr
C, D	2500	1-4	3 hr
9V	175	1-2	7 hr

\*When using two bays only.

### LIFETIME LIMITED WARRANTY

This Energizer Battery Charger and these Energizer Nickel-Metal Hydride Rechargeable Batteries are warranted only to the original United States or Canadian purchaser upon presentation of proof of original purchase to be free from defects in material and workmanship for as long as you own your Energizer Battery Charger and these Energizer Nickel-Metal Hydride Rechargeable Batteries and this product is manufactured by or for Energizer and such warranty is not transferable to any subsequent end user. Not applicable to damage caused by normal wear and tear, misuse, or modification. Repair or replacement of charger at Energizer's option, Call 1-800-383-7323 for return instructions, WARRANTY APPLIES TO CONSUMER USE ONLY. ALL INCIDENTAL AND CONSEQUENTIAL DAMAGES ARE EXCLUDED. SOME STATES OR PROVINCES DO NOT ALLOW THE EXCLUSION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THESE EXCLUSIONS MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY HAVE OTHER RIGHTS WHICH VARY FROM STATE OR PROVINCE.

Questions? Visit [www.energizer.com](http://www.energizer.com)

Energizer Holdings, Inc., St. Louis, MO 63141, U.S.A.

UPN-120801