





[Print Part Numbers](#)
[Close Window](#)

**MN SERIES TRANSFORMER DISCONNECT PART NUMBERS:
 STANDARD VOLTAGES 460V - 115V**

P/N	VA	H	W	D	MW	MD	F1	F2	F3
MN250	250	10.25(260)	7.25(184)	7.50(191)	6.00(152)	6.88(175)	1A	1A	2A
MN500	500	10.25(260)	7.25(184)	7.50(191)	6.00(152)	6.88(175)	2A	2A	2A
MN750	750	10.25(260)	7.25(184)	7.50(191)	6.00(152)	6.88(175)	4A	2A	4A
MN1000	1000	10.25(260)	7.25(184)	7.50(191)	6.00(152)	6.88(175)	5A	2A	8A
MN1500	1500	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	7A	5A	8A
MN2000	2000	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	10A	10A	8A
MN3000	3000	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	15A	10A	15A
<hr/>									
MN250-LR	250	10.25(260)	7.25(184)	7.50(191)	6.00(152)	6.88(175)	1A	2A	-
MN500-LR	500	10.25(260)	7.25(184)	7.50(191)	6.00(152)	6.88(175)	2A	4A	-
MN750-LR	750	10.25(260)	7.25(184)	7.50(191)	6.00(152)	6.88(175)	4A	6A	-
MN1000-LR	1000	10.25(260)	7.25(184)	7.50(191)	6.00(152)	6.88(175)	5A	8A	-
MN1500-LR	1500	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	7A	12A	-
MN2000-LR	2000	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	10A	15A	-
MN3000-LR	3000	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	15A	25A	-
<hr/>									
MN250-65K	250	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	1A	1A	2A
MN500-65K	500	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	2A	2A	2A
MN750-65K	750	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	4A	2A	4A
MN1000-65K	1000	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	5A	2A	8A
MN1500-65K	1500	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	7A	10A	8A
MN2000-65K	2000	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	10A	10A	8A
MN3000-65K	3000	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	15A	10A	15A
<hr/>									
MN250-LR-65K	250	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	1A	2A	-
MN500-LR-65K	500	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	2A	2A	-
MN750-LR-65K	750	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	4A	6A	-
MN1000-LR-65K	1000	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	5A	8A	-
MN1500-LR-65K	1500	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	7A	12A	-
MN2000-LR-65K	2000	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	10A	15A	-
MN3000-LR-65K	3000	11.63(295)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	15A	25A	-
<hr/>									
MN250-200K	250	13.13(334)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	1A	1A	2A
MN500-200K	500	13.13(334)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	2A	2A	2A
MN750-200K	750	13.13(334)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	4A	2A	4A
MN1000-200K	1000	13.13(334)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	5A	2A	8A
MN1500-200K	1500	13.13(334)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	7A	10A	8A
MN2000-200K	2000	13.13(334)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	10A	10A	8A
MN3000-200K	3000	13.13(334)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	15A	10A	15A
<hr/>									
MN250-LR-200K	250	13.13(334)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	1A	2A	-
MN500-LR-200K	500	13.13(334)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	2A	4A	-
MN750-LR-200K	750	13.13(334)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	4A	6A	-
MN1000-LR-200K	1000	13.13(334)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	5A	7A	-
MN1500-LR-200K	1500	13.13(334)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	7A	15A	-
MN2000-LR-200K	2000	13.13(334)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	10A	15A	-

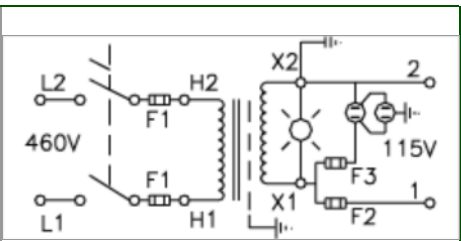


Schematic Standard w/Grounded Secondary with Receptacle

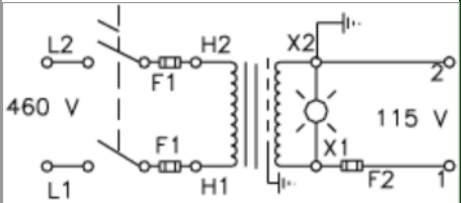

Schematic Standard w/Grounded Secondary without Receptacle

DIMENSIONS:

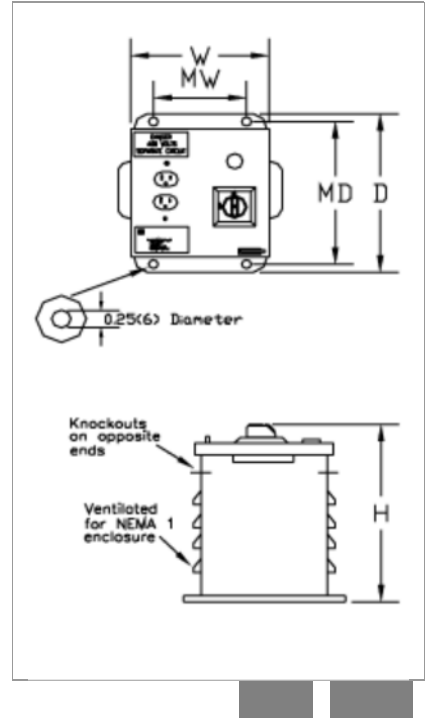

MN3000- LR-200K	3000	13.13(334)	8.50(216)	10.50(267)	7.13(181)	9.75(248)	15A	25A	-
----------------------------	-------------	-------------------	------------------	-------------------	------------------	------------------	------------	------------	----------

© 2017 Marcie Electric Inc. 8190 Boardwalk Ste B • Brighton, MI 48116 • (248) 486-1200 • Fax: (248) 486-1202