

New Products



MODEL 516X



MODEL 516



SureTork® Torque Wrench for pipeline work

The SureTork Torque Wrench can greatly facilitate proper clamp installation by ensuring that nuts are always properly torqued. Unlike other torque wrenches its bolt-thru feature permits easy access to nuts on any threaded length.

- Torque setting is field adjustable from 30 to 150 lb-ft in one lb-ft increments
- Unique bolt-thru head allows use on any length bolt or all-thread rod
- Helps meet manufacturers installation and warranty requirements
- Also available in sets with standard or extended reach sockets
- Standard hex and square sockets from 5/8 inch to 1-1/4 inch
- Extended reach hex sockets from 7/8 inch to 1-1/4 inch
- Torque handle clicks when set torque is reached
- Quick Release socket for fast socket changes
- Heavy duty reversible ratchet head

Available Socket Sizes:

Standard Hex

Inch - 5/8, 3/4, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4
MM - 16, 17, 19, 22, 24, 25, 27, 28, 30, 32

Extended Reach Hex

Inch - 3/4, 7/8, 15/16, 1-1/16, 1-1/8, 1-1/4

Standard Square

Inch - 5/8, 11/16, 3/4, 1, 1-1/16, 1-1/8, 1-1/4
MM - 16, 17, 19, 22, 24, 25, 27, 2

SureTork Set 516

Includes one SureTork wrench and six standard bolt-thru sockets

SureTork Set 516X


Includes one SureTork wrench and five extended reach bolt-thru sockets

Triple Square Tower Wrench

Provides greater flexibility for utility, construction, and maintenance workers when dealing with the most common tower fastener nut sizes .

- Three models:
 - I03T, stamped handle, 12" long
 - I04T, stamped handle, 15" long
 - I05T, stamped handle, 18" long
- Three square sizes: 1 1/8", 1 1/4", 1 1/2"
- Sturdy ratchet mechanism reverses with the flick of a lever
- Bolt-thru design
- Coated with epoxy paint for durability and easy cleaning
- Socket painted fluorescent orange for high visibility
- Vinyl grip for comfort
- Up to 300 lb-ft torque

Part Number	Description
21-103LI-0000	Handle I03T (12 inch)
21-104LI-0000	Handle I04T (15 inch)
21-105LI-0000	Handle I05T (18 inch)
22-L3824-5903	Transmission Socket

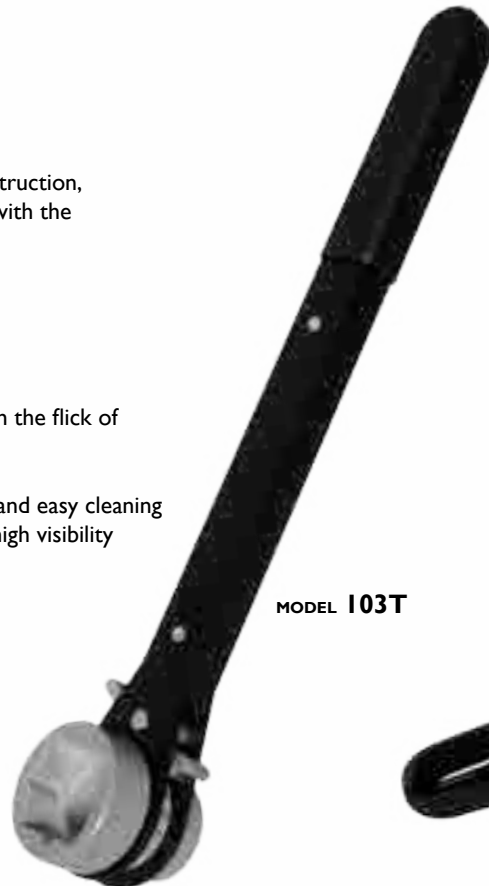

MODEL I03T

101 XRS Pad Mount Transformer Wrench

Designed for the 5-point (security pentagon) and 3/4" security hardware used in pad mount transformers.

- Rugged one-piece design incorporates gear, shaft, and sockets
- Sturdy ratchet mechanism reverses with the flick of a lever
- 32 teeth reduce throw angle for work in tight spots
- Socket openings are 3/4" hex and 7/8" pentagon
- Wrench head pinned to reduce wobbling for better torque and less wear
- Torque tested to 90 lb-ft
- Vinyl grip for comfort
- Length 7 inches
- Weight 1.5 lbs.



MODEL I01XRS