


Wiha Insulated Screwdrivers with SoftFinish® Cushion Grip Handle

Insulation Test Standards:

Insulation according to EN/IEC 60900, ASTM F-1505-01, New VDE 0682/part 201, DIN 7437, NFPA70E & CSA

Responds to OSHA's use specification 29 CFR1910

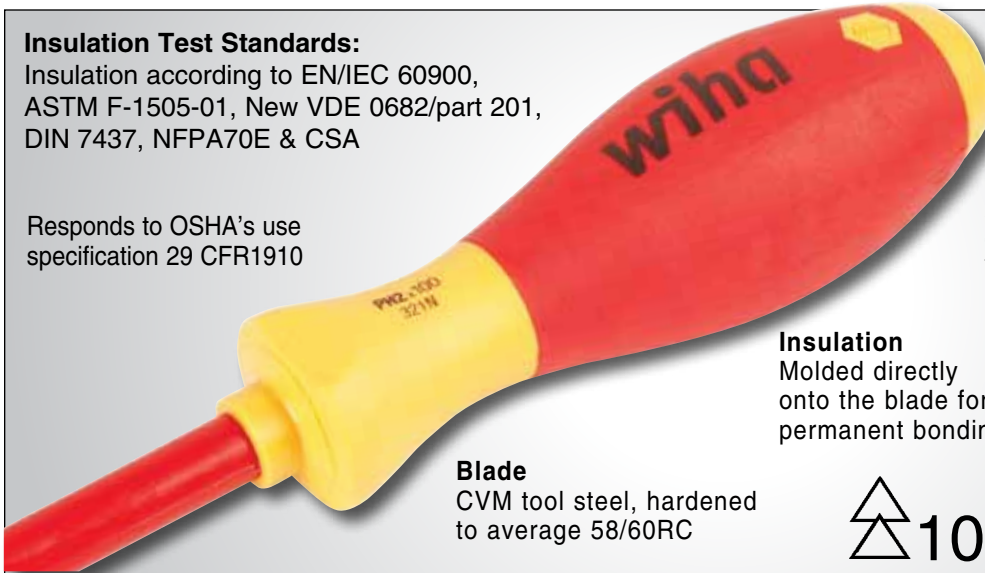

Each tool individually tested to 10,000 volts and rated to 1000 Volt ac or 1500 Volt dc

SoftFinish® handle
solid molded core with soft outer cushion grip. 40% more torque than conventional handles

Insulation
Molded directly onto the blade for permanent bonding

Blade
CVM tool steel, hardened to average 58/60RC

1000V



page 32



1000Volt

SHOP

320 Slotted Screwdriver, With Wiha-SoftFinish® Handle
Insulation According to ASTM F-1505-01, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, **1000 Volt. Individually Tested.**

Item	Slotted	Phillips	Hex	Hex Torx	Hex Torx	Hex Torx	Hex Torx	Hex Torx	Hex Torx
No.	mm	Inch	Inch	mm	Inch	mm	Inch	lbs.	pkg.
32005	2.0	.078	5/64	60	3.0	164	6.5	.05	10
32010	2.5	.098	3/32	75	3.0	179	7.1	.06	10
32012	3.0	.118	1/8	100	4.0	204	8.0	.07	10
32015	3.5	.139	9/64	100	4.0	204	8.0	.07	10
32017	4.0	.157	5/32	100	4.0	211	8.3	.12	10
32023	4.5	.177	3/16	100	4.0	211	8.3	.12	10
32024	4.5	.177	3/16	125	5.0	236	9.3	.12	10
32027	4.5	.177	3/16	150	6.0	261	10.2	.14	10
32025	4.5	.177	3/16	175	7.0	286	11.2	.13	10
32028	4.5	.177	3/16	200	8.0	311	12.3	.15	10
32031	5.5	.216	7/32	125	5.0	243	9.5	.15	10
32026	5.5	.216	7/32	175	7.0	293	11.5	.21	10
32034	6.0	.236	15/64	150	6.0	268	10.6	.21	10
32039	6.5	.255	1/4	150	6.0	268	10.6	.21	10
32042	8.0	.315	5/16	175	7.0	299	11.8	.34	10
32045	10.0	.393	3/8	200	8.0	318	12.5	.39	10



1000Volt

SHOP

321 Phillips Screwdriver, With Wiha-SoftFinish® Handle
Insulation According to ASTM F-1505-01, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, **1000 Volt. Individually Tested.**

Item	Phillips	Hex	Hex Torx	Hex Torx	Hex Torx	Hex Torx	Hex Torx	Hex Torx
No.	Size	mm	Inch	mm	Inch	lbs.	pkg.	
32100	0	60	2.4	164	6.5	.06	10	
32101	1	80	3.0	191	7.5	.12	10	
32102	2	100	4.0	218	8.6	.20	10	
32103	3	150	6.0	268	10.6	.34	10	
32104	4	200	8.0	318	12.5	.39	10	




1000Volt

SHOP

32090 4 Piece Slotted & Phillips Set

Item	Slotted	Phillips	Hex	Hex Torx	Hex Torx	Hex Torx	Hex Torx	Hex Torx
No.	mm	mm	mm	Size	mm	.76 lbs.		
32090	Slotted	3.5	100	0.6	Phillips	1	80	
	Slotted	4.5	125	1.0	Phillips	2	100	

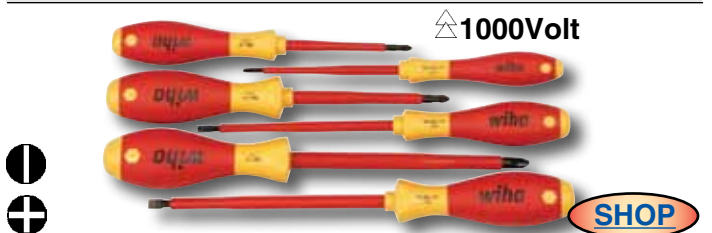

1000Volt

SHOP

32092 6 Piece Slotted & Phillips Set

Item No.	Slotted	Phillips	lbs.
32092	Slotted: 3.5, 4.5, 6.5	Phillips: 1, 2, 3	1.38



32091 5 Piece Slotted & Phillips Set

Item No.	Slotted	Phillips	lbs.
32091	Slotted: 3.0, 4.5, 6.5	Phillips: 1, 2	1.31



1000Volt

SHOP

32188 7 Piece Slotted & Phillips Set

Item No.	Slotted	Phillips	lbs.
32188	Slotted: 2.0, 2.5, 3.0, 3.5, 4.0	Phillips: 0, 1	.92