

Tactical Flashlights



These compact polymer tactical flashlights use a CREE® LED rated at 180 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 190 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a pair of included CR-123 Lithium batteries.



TAC-300B

180 Lumens

- 3 Hours run-time
- Momentary or constant-on
- Beam distance rated at 190 meters
- Glass-filled nylon polymer housing
- Powered by 2 – CR-123 Lithium batteries (included)



TAC-300Y
TAC-300T





High-efficiency deep parabolic reflector

Tactical Flashlights

Large textured tail-switch

FEATURES: ALL MODELS

- Cree® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap with type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by 2 – CR-123 Lithium batteries (included)
- Removable pocket clip
- Available in black, tan & yellow
- Limited Lifetime Warranty*

SPECIFICATIONS

- Lumens: 180
- Run-time: 3 hours
- Beam distance: 190 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in, head diameter: 1.25in, handle diameter: 1.035in, weight: 4.4oz

FL 1 STANDARD		
180 LUMENS	3h	190m
9150cd	2m	1m

INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip



Weapon mountable (400B-RPS required)

Handheld



MODELS/ACCESSORIES



Safety Cones



Remote Pressure Switch



Side Switch



Spare Batteries

Model	Description	UPC 0 17398
TAC-300B	Black	80219 2
TAC-300T	Tan	80220 8
TAC-300Y	Yellow	80221 5
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
CR-123-10	CR-123 Lithium batteries (10 pack)	80112 6

*Limited Lifetime Warranty • Product is warranted to be free from defects in workmanship and materials for the original purchaser's lifetime. The Limited Lifetime Warranty includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two (2) years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.

TAC-300B

Polymer Tactical Flashlight Non-Rechargeable



MARKET APPLICATIONS	Law enforcement, fire & rescue, industrial, security, hardware/tool, automotive, hunting/recreation.
DESCRIPTION	The Nightstick TAC-300 is a non-rechargeable LED Tactical Polymer Flashlight that outperforms most other lights that cost twice as much. With a CREE® LED rated at 180 lumens and its high-efficiency deep parabolic reflector, the TAC-300's beam has an effective range of 190 meters (over 620 feet). Its waterproof design in combination with its impact and chemical resistant glass-filled nylon polymer housing, make the TAC-300 one of the toughest tactical lights around. The large tail-cap switch provides momentary or constant-on light operations. Running on a pair of included CR-123 Lithium batteries, the TAC-300 is rated at 3 hours of runtime. Meets requirements of NFPA-1971-8.6 (2013).
CASE MATERIAL	Glass-filled Nylon Polymer - Black
DIMENSIONS	Length: 5.5 inches (140 mm) • Handle Diameter: 1.035 inches (26 mm) • Head Diameter: 1.25 inches (32 mm)
WEIGHT	Weight: 4.4 oz. (128 g) with batteries installed.
LENS	Unbreakable polycarbonate with scratch resistant coating.
LIGHT SOURCE	Cree® LED. Impervious to shock with a 50,000 hour lifetime.
LIGHT OUTPUT	180 lumens
ON/OFF	Single Tail Switch - Momentary or Constant-on
RUN-TIME	3 hours
BATTERY	2 Lithium CR-123 Batteries (included)
FEATURES	<ul style="list-style-type: none"> • CREE® LED technology – 50,000 + hours LED life • Momentary or constant-on flashlight • Sharp focused beam • Glass-filled nylon polymer housing - Black • Aircraft-grade 6061-T6 aluminum tail-cap with Type III hard anodized finish • Non-slip grip • Large textured tail-switch • 1" Handle diameter fits most scope/flashlight mounts • 1.25" Head diameter accepts 3rd party filters • Waterproof • Impact & chemical resistant • Meets requirements of NFPA-1971-8.6 (2013) • Powered by 2 – CR-123 Lithium batteries (included) • Includes removable pocket clip
WARRANTY	Limited Lifetime Warranty • Includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.

APPROVALS



OPTIONAL ACCESSORIES

Side Switch, Remote Pressure Switch, Red or Yellow Safety Cones, and Holsters

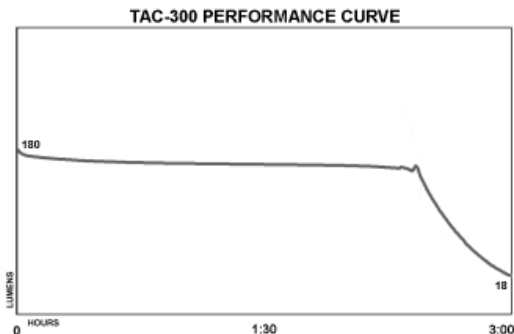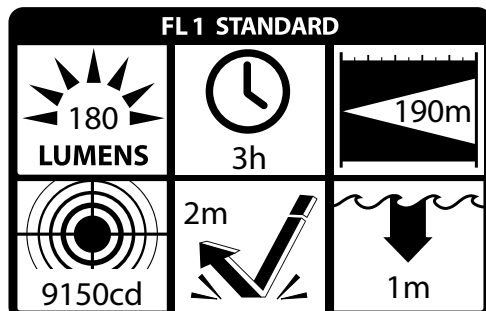

BAYCO PRODUCTS LIMITED LIFETIME WARRANTY

WARRANTY

Bayco Products, Inc. warrants this product to be free from defects in workmanship and materials for the original purchaser's lifetime. The Limited Lifetime Warranty includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.

In the event that Bayco Products, Inc. receives notice that any product does not conform to its warranty, the original purchaser's sole and exclusive remedy, and Bayco Products, Inc.'s sole and exclusive liability, shall be for Bayco Products, Inc., at its sole option, to either repair or replace the non-conforming product in accordance with this limited warranty. The original purchaser shall follow the instructions below to qualify for a repair or replacement product. This is the only warranty, expressed or implied, including any warranty of merchantability or fitness for a particular purpose.

IN NO EVENT WILL BAYCO PRODUCTS, INC. OR ITS AFFILIATES OR SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY KIND REGARDLESS OF THE FORM OF ACTION, WHETHER IN CONTRACT, TORT (INCLUDING NEGLIGENCE), STRICT LIABILITY OR OTHERWISE. THE TOTAL CUMULATIVE LIABILITY TO CUSTOMER, FROM ALL CAUSES OF ACTION AND ALL THEORIES OF LIABILITY, WILL BE LIMITED TO AND WILL NOT EXCEED THE PURCHASE PRICE OF THE PRODUCT PAID BY CUSTOMER.

If this product is used for rental purposes, the warranty term is reduced to 90 days from the date of purchase.

WARRANTY CLAIMS – USA

Return the product to the place of purchase for all warranty related issues. If this is not possible, contact Bayco Customer Service for a Return Goods Authorization (RGA). Do not return this product to Bayco without first receiving an RGA Number from Bayco Customer Service. When returning the product, the RGA Number must be written on the outside of the shipping box.

WARRANTY CLAIMS – OUTSIDE OF USA

Return the product to the place where purchased for all warranty related issues.

EXTENT OF COVERED WARRANTY WORK

Bayco will repair or replace this product at our option. If it is determined that the warranty is no longer in effect, Bayco will contact you with a repair estimate before beginning any work.

WARRANTY QUESTIONS

If you have any questions about this warranty or any other Bayco product inquiries, please contact Bayco Customer Service.

Nightstick Product Battery Replacement Information

Product Part Number	How to Open Battery Compartment	Tool Required	Battery Type & Quantity	Replacing AA, AAA or AAAA Alkaline w/ Rechargeable	Replacing CR-123 w/ Rechargeable	Battery Carrier Required	Nightstick Rechargeable Upgrade Option	Nightstick Rechargeable Replacement Battery	Intrinsically Safe Certification Alkaline Battery Requirements**
FDL-300R	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	No	No	N/A	N/A
FDL-300R-K01	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	No	No	N/A	N/A
MT-100	Unscrew Tail Cap	None	2 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
MT-100BL	Unscrew Tail Cap	None	2 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
MT-100CTD	Unscrew Tail Cap	None	2 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
MT-100R	Unscrew Tail Cap	None	2 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
MT-110	Unscrew Tail Cap	None	1 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
MT-120	Unscrew Tail Cap	None	2 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
MT-130	Unscrew Tail Cap	None	2 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
MT-140B	Unscrew Tail Cap	None	2 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
MT-200	Unscrew Tail Cap	None	2 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
MT-210	Unscrew Tail Cap	None	1 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
MT-220	Unscrew Tail Cap	None	2 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
MT-230	Unscrew Tail Cap	None	1 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
MT-90	Unscrew Tail Cap	None	1 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
MTU-106	Unscrew Tail Cap	None	2 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
MTU-136	Unscrew Tail Cap	None	2 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1102A	Slide Battery Cover toward base of light	None	2 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1136	Slide Battery Cover toward base of light	None	4 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1162	Slide Battery Cover toward base of light	None	4 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1164	Slide Battery Cover toward base of light	None	4 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1166	Slide Battery Cover toward base of light	None	4 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1168	Slide Battery Cover toward base of light	None	4 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A

Product Part Number	How to Open Battery Compartment	Tool Required	Battery Type & Quantity	Replacing AA, AAA or AAAA Alkaline w/ Rechargeable	Replacing CR-123 w/ Rechargeable	Battery Carrier Required	Nightstick Rechargeable Upgrade Option	Nightstick Rechargeable Replacement Battery	Intrinsically Safe Certification Alkaline Battery Requirements**
NSP-1170	Slide Battery Cover toward base of light	None	4 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1172	Slide Battery Cover toward base of light	None	4 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1174	Slide Battery Cover toward base of light	None	4 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1174-K01	Slide Battery Cover toward base of light	None	4 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1176	Slide Battery Cover toward base of light	None	4 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1178	Slide Battery Cover toward base of light	None	4 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1180	Slide Battery Cover toward base of light	None	4 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1206B	Slide Battery Cover toward base of light	None	2 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1206R	Slide Battery Cover toward base of light	None	2 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1224B	Slide Battery Cover toward base of light	None	4 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1224CTD	Slide Battery Cover toward base of light	None	4 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1224R	Slide Battery Cover toward base of light	None	4 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1236	Slide Battery Cover toward base of light	None	4 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1260	Slide Battery Cover toward base of light	None	4 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1310CTD	Unscrew Cap at base of light	None	3 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1310RM	Unscrew Cap at base of light	None	3 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1312RM	Unscrew Cap at base of light	None	3 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1400B	Slide Battery Cover toward base of light	None	2 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1400R	Slide Battery Cover toward base of light	None	2 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1400T	Slide Battery Cover toward base of light	None	2 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1402B	Slide Battery Cover toward base of light	None	2 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1404B	Slide Battery Cover toward base of light	None	2 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-1632	Unscrew Cap at base of light	None	3 - AAA	NiCad or NiMH Only*	N/A	AAA Carrier	No	N/A	N/A
NSP-1634	Unscrew Cap at base of light	None	3 - AAA	NiCad or NiMH Only*	N/A	AAA Carrier	No	N/A	N/A

Product Part Number	How to Open Battery Compartment	Tool Required	Battery Type & Quantity	Replacing AA, AAA or AAAA Alkaline w/ Rechargeable	Replacing CR-123 w/ Rechargeable	Battery Carrier Required	Nightstick Rechargeable Upgrade Option	Nightstick Rechargeable Replacement Battery	Intrinsically Safe Certification Alkaline Battery Requirements**
NSP-1636	Unscrew Cap at base of light	None	3 - AAA	NiCad or NiMH Only*	N/A	AAA Carrier	No	N/A	N/A
NSP-2422B	Unscrew Bezel and slide Reflector/LED Module out	None	3 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-2422R	Unscrew Bezel and slide Reflector/LED Module out	None	3 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-410	Unscrew Tail Cap	None	1 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-420	Unscrew Tail Cap	None	3 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-430	Unscrew Tail Cap	None	2 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-4602B	Loosen fitting on back of head & rotate door downward	Slotted Screwdriver Screwdriver	3 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-4603B	Loosen fitting on back of head & rotate door downward	None	3 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-4604B	Loosen fitting on back of head & rotate door downward	Slotted Screwdriver Screwdriver	3 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-4605B	Loosen fitting on back of head & rotate door downward	None	3 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-4606B	Loosen fitting on back of head & rotate door downward	None	3 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-4608B	Loosen fitting on back of head & rotate door downward	Slotted Screwdriver	3 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-4608BC	Loosen fitting on back of head & rotate door downward	Slotted Screwdriver	3 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-4610B	Loosen fitting on back of head & rotate door downward	Slotted Screwdriver	3 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-4612B	Loosen fitting on rear battery compartment & rotate door downward	None	3 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-4614B	Loosen fitting on back of head & rotate door downward	None	3 - AAA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-4616B	Loosen fitting on rear battery compartment & rotate door downward	Phillips Screwdriver	3 - AA	NiCad or NiMH Only*	N/A	No	No	N/A	N/A
NSP-4650B	Loosen fitting on back of light & rotate door downward	Slotted Screwdriver	2 - CR-123	N/A	No, will damage product	No	No	N/A	N/A
NSP-9842XL	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	9842-CARRIER	9844-BATT Only	N/A	N/A
NSR-9844XL	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	9842-CARRIER	No	9844-BATT Only	N/A
NSR-9854XL	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	9842-CARRIER	No	9844-BATT Only	N/A
TAC-300B	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	No	No	N/A	N/A
TAC-300B-K01	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	No	No	N/A	N/A
TAC-300T	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	No	No	N/A	N/A

Product Part Number	How to Open Battery Compartment	Tool Required	Battery Type & Quantity	Replacing AA, AAA or AAAA Alkaline w/ Rechargeable	Replacing CR-123 w/ Rechargeable	Battery Carrier Required	Nightstick Rechargeable Upgrade Option	Nightstick Rechargeable Replacement Battery	Intrinsically Safe Certification Alkaline Battery Requirements**
TAC-300Y	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	No	No	N/A	N/A
TAC-302B	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	No	No	N/A	N/A
TAC-302B-K01	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	No	No	N/A	N/A
TAC-310XL	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	No	No	N/A	N/A
TAC-350B	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	No	No	N/A	N/A
TAC-360XL	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	No	No	N/A	N/A
TAC-400B	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	500-CARRIER	No	400-BATT Only	N/A
TAC-400T	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	500-CARRIER	No	400-BATT Only	N/A
TAC-400Y	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	500-CARRIER	No	400-BATT Only	N/A
TAC-410XL	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	500-CARRIER	No	560-BATT Only	N/A
TAC-450B	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	500-CARRIER	No	400-BATT Only	N/A
TAC-460XL	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	500-CARRIER	No	560-BATT Only	N/A
TAC-460XL-K01	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	500-CARRIER	560-BATT Only	N/A	N/A
TAC-500B	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	500-CARRIER	No	400-BATT Only	N/A
TAC-500T	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	500-CARRIER	No	400-BATT Only	N/A
TAC-500Y	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	500-CARRIER	No	400-BATT Only	N/A
TAC-510XL	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	500-CARRIER	No	560-BATT Only	N/A
TAC-540XL	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	500-CARRIER	560-BATT Only	N/A	N/A
TAC-550B	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	500-CARRIER	No	560-BATT Only	N/A
TAC-560XL	Unscrew Tail Cap	None	2 - CR-123	N/A	No, will damage product	500-CARRIER	No	560-BATT Only	N/A
XPP-5410G	Unscrew Tail Cap	Phillips Screwdriver	2 - AAA	Invalidates IS Certification	N/A	No	No	N/A	Energizer E92, Energizer EN92 Duracell MX2400, Duracell PC2400 or Duracell EN92
XPP-5412G	Unscrew Tail Cap	Phillips Screwdriver	3 - AAAA	Invalidates IS Certification	N/A	No	No	N/A	Duracell MX2500 or Energizer E96
XPP-5420B	Loosen Bezel Screw, unscrew Bezel and slide Reflector/LED Module out	Phillips Screwdriver	3 - AA	Invalidates IS Certification	N/A	No	No	N/A	Duracell PC1500, Energizer EN91 or Energizer L91
XPP-5420G	Loosen Bezel Screw, unscrew Bezel and slide Reflector/LED Module out	Phillips Screwdriver	3 - AA	Invalidates IS Certification	N/A	No	No	N/A	Duracell PC1500, Energizer EN91 or Energizer L91

Product Part Number	How to Open Battery Compartment	Tool Required	Battery Type & Quantity	Replacing AA, AAA or AAAA Alkaline w/ Rechargeable	Replacing CR-123 w/ Rechargeable	Battery Carrier Required	Nightstick Rechargeable Upgrade Option	Nightstick Rechargeable Replacement Battery	Intrinsically Safe Certification Alkaline Battery Requirements**
XPP-5420GX	Loosen Bezel Screw, unscrew Bezel and slide Reflector/LED Module out	Phillips Screwdriver	3 - AA	Invalidates IS Certification	N/A	No	No	N/A	Duracell PC1500, Energizer EN91 or Energizer L91
XPP-5422B	Loosen Bezel Screw, unscrew Bezel and slide Reflector/LED Module out	Phillips Screwdriver	3 - AA	Invalidates IS Certification	N/A	No	No	N/A	Duracell PC1500, Energizer EN91 or Energizer L91
XPP-5422G	Loosen Bezel Screw, unscrew Bezel and slide Reflector/LED Module out	Phillips Screwdriver	3 - AA	Invalidates IS Certification	N/A	No	No	N/A	Duracell PC1500, Energizer EN91 or Energizer L91
XPP-5422GX	Loosen Bezel Screw, unscrew Bezel and slide Reflector/LED Module out	Phillips Screwdriver	3 - AA	Invalidates IS Certification	N/A	No	No	N/A	Duracell PC1500, Energizer EN91 or Energizer L91
XPP-5422GM	Loosen Bezel Screw, unscrew Bezel and slide Reflector/LED Module out	Phillips Screwdriver	3 - AA	Invalidates IS Certification	N/A	No	No	N/A	Duracell PC1500, Energizer EN91 or Energizer L91
XPP-5422GMX	Loosen Bezel Screw, unscrew Bezel and slide Reflector/LED Module out	Phillips Screwdriver	3 - AA	Invalidates IS Certification	N/A	No	No	N/A	Duracell PC1500, Energizer EN91 or Energizer L91
XPP-5450G	Loosen fitting on back of head & rotate door downward	Phillips Screwdriver	3 - AAA	Invalidates IS Certification	N/A	No	No	N/A	Energizer E92 or Energizer EN92
XPP-5452G	Loosen fitting on back of head & rotate door downward	Phillips Screwdriver	3 - AAA	Invalidates IS Certification	N/A	No	No	N/A	Energizer E92 or Energizer EN92
XPP-5454G	Loosen fitting on back of head & rotate door downward	Slotted Screwdriver	3 - AAA	Invalidates IS Certification	N/A	No	No	N/A	Energizer E92 or Energizer EN92
XPP-5454GC	Loosen fitting on back of head & rotate door downward	Slotted Screwdriver	3 - AAA	Invalidates IS Certification	N/A	No	No	N/A	Energizer E92 or Energizer EN92
XPP-5456G	Loosen fitting on rear battery compartment & rotate door downward	Allen Wrench	3 - AA	Invalidates IS Certification	N/A	No	No	N/A	Duracell PC1500, Energizer EN91 or Energizer L91
XPP-5458G	Loosen fitting on rear battery compartment & rotate door downward	Allen Wrench	3 - AA	Invalidates IS Certification	N/A	No	No	N/A	Duracell PC1500, Energizer EN91 or Energizer L91
XPP-5570G	Loosen fitting on bottom of handle & rotate door open	Torx Wrench/Screwdriver	6 - AA	Invalidates IS Certification	N/A	5570-BATT	5572-BATT Only	N/A	Energizer EN91 or Energizer L91
XPP-5570GA	Loosen fitting on bottom of handle & rotate door open	Torx Wrench/Screwdriver	6 - AA	Invalidates IS Certification	N/A	5570-BATT	5572-BATT Only	N/A	Energizer EN91 or Energizer L91
XPP-5570R	Loosen fitting on bottom of handle & rotate door open	Torx Wrench/Screwdriver	6 - AA	Invalidates IS Certification	N/A	5570-BATT	5572-BATT Only	N/A	Energizer EN91 or Energizer L91
XPP-5570RA	Loosen fitting on bottom of handle & rotate door open	Torx Wrench/Screwdriver	6 - AA	Invalidates IS Certification	N/A	5570-BATT	5572-BATT Only	N/A	Energizer EN91 or Energizer L91
XPR-5572G	Loosen fitting on bottom of handle & rotate door open	Torx Wrench/Screwdriver	6 - AA	Invalidates IS Certification	N/A	5570-BATT	No	5572-BATT Only	Energizer EN91 or Energizer L91
XPR-5572GA	Loosen fitting on bottom of handle & rotate door open	Torx Wrench/Screwdriver	6 - AA	Invalidates IS Certification	N/A	5570-BATT	No	5572-BATT Only	Energizer EN91 or Energizer L91
XPR-5572R	Loosen fitting on bottom of handle & rotate door open	Torx Wrench/Screwdriver	6 - AA	Invalidates IS Certification	N/A	5570-BATT	No	5572-BATT Only	Energizer EN91 or Energizer L91
XPR-5572RA	Loosen fitting on bottom of handle & rotate door open	Torx Wrench/Screwdriver	6 - AA	Invalidates IS Certification	N/A	5570-BATT	No	5572-BATT Only	Energizer EN91 or Energizer L91
XPR-5572RM	Loosen fitting on bottom of handle & rotate door open	Torx Wrench/Screwdriver	6 - AA	Invalidates IS Certification	N/A	5570-BATT	No	5572-BATT Only	Energizer EN91 or Energizer L91

* Not offered by Bayco Products. These would be commercially available rechargeable NiCad or NiMH Battery(ies). Do NOT use Lithium-ion Rechargeable Battery(ies)

** Using a different battery other than what is listed will invalidate Intrinsically Safe Certification Rating

Declaration of Conformity
TAC-300B

The equipment which accompanies this declaration is in conformity with EU Directive(s):
EU Directive 2011/65/EU, concerning the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS), as adopted by EU member states on January 2, 2013 (including restrictions on the use of Deca-BDE) ("EU RoHS"). The specifics of this compliance are as follows:

These Products are fully compliant and do not contain the restricted substances above levels noted in EU RoHS.

Including:

- Cadmium (Cd),
- Lead (Pb),
- Mercury (Hg),
- Hexavalent chromium (Cr ⁶⁺),
- the following flame retardants:
 - polybrominated biphenyls (PBB)
 - polybrominated diphenyl ethers (PBDE)

Phthalates:

- (DnHP) Di-n-Hexyl Phthalate
- (DnBP) Di-n-Butyl Phthalate
- (BBP) Di-Ethyl Hexyl Phthalate
- (DEHP) Di-n-Octyl Phthalate
- (DINP) Di-Isononyl PHthalate
- (DIDP) Di-Isodecyl Phthalate

Manufacturer: Bayco Products, Inc.

A copy of the Technical file is maintained at:
Bayco Products, Inc.

Description of Equipment (TAC-300B)

This product is a portable flashlight.



Signature:

Bijan Bayat

President / CEO

3/01/2014