



Main

Range of Product	Lexium 32i
Product or Component Type	Connector module
Accessory / separate part category	Connection accessories
Electrical Connection	Industrial connector

Complementary

Product compatibility	Control unit LXM32i EtherCAT Control unit LXM32i Profinet
Accessory / separate part destination	Motor BMI with drive control unit Lexium 32i
Range Compatibility	Lexium 32i
Communication interface	EtherCAT Profinet
Input/output type	4 discrete inputs
Discrete input logic	Source
Safety Function	STO (safe torque off)
Net Weight	0.49 lb(US) (0.22 kg)

Ordering and shipping details

Category	18289-LEXIUM INTEGRATED DRIVES ACC
Discount Schedule	PC56
GTIN	3606480610837
Returnability	No
Country of origin	DE

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.23 in (8.200 cm)
Package 1 Width	4.65 in (11.800 cm)
Package 1 Length	6.77 in (17.200 cm)
Package 1 Weight	7.83 oz (222.000 g)
Unit Type of Package 2	S03
Number of Units in Package 2	12
Package 2 Height	11.81 in (30.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	7.23 lb(US) (3.280 kg)


Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------

Connection of I/O Module for EtherCAT with Industrial Connectors

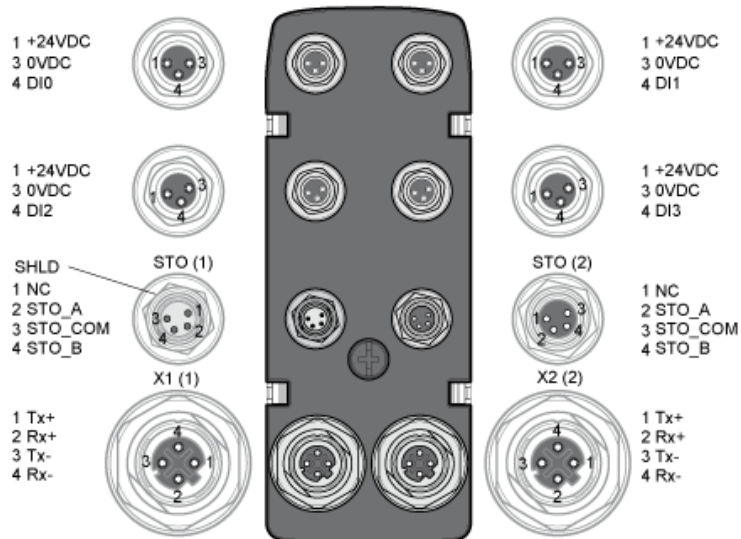

- (1) IN
(2) OUT

Signal	Meaning
+24VDC	24 V signal power supply
0VDC	Reference potential to +24VDC
DI0	Digital input 0
DI1	Digital input 1
DI2	Digital input 2
DI3	Digital input 3
STO_A	Safety function STO
STO_COM	Reference potential for safety function STO
STO_B	Safety function STO
SHLD	Shield (grounded internally)
Tx+	Ethernet transmit signal +
Tx-	Ethernet transmit signal -
Rx+	Ethernet receive signal +
Rx-	Ethernet receive signal -
NC	Not connected