





OB/SB-1

4" Octagon Boxes


With Conduit Knockouts




40-1/2
1-1/2" Deep




40-3/4
1-1/2" Deep




40-SPL
1-1/2" Deep




40JB-1/2
1-1/2" Deep
JB bracket set flush,
gauging notches 3/8" & 1/2"




40D-1/2
2-1/8" Deep



40D-3/4
2-1/8" Deep




40D-SPL
2-1/8" Deep



40VB-1/2
1-1/2" Deep
Vertical bracket set back 5/8"

OB/SB-1

Catalog Number (Universal No.)	Depth (inches)	Wiring Cubic Inch Capacity	Knockout Description			Wt. Lbs. Per 100	Std. Pkg.
			Sides	Ends	Bottom		
40-1/2 (54151-1/2)	1-1/2	15.5	(4)1/2"	--	(5)1/2"	52.0	25
40-3/4 (54151-3/4)	1-1/2	15.5	(4)3/4"	--	(3)1/2" (2)3/4"	52.0	25
40-SPL (54151SPL)	1-1/2	15.5	(2)1/2" (2)3/4"	--	(3)1/2" (2)3/4"	52.0	25
40JB-1/2 (54151J-1/2)	1-1/2	15.5	(4)1/2"	--	(5)1/2"	68.0	25
40D-1/2 (54171-1/2)	2-1/8	21.5	(4)1/2"	--	(5)1/2"	66.0	50
40D-3/4 (54171-3/4)	2-1/8	21.5	(4)3/4"	--	(3)1/2" (2)3/4"	66.0	25
40D-SPL (54171SPL)	2-1/8	21.5	(2)1/2" (2)3/4"	--	(3)1/2" (2)3/4"	68.0	25
40VB-1/2 (54151F-1/2)	1-1/2	15.5	(3)1/2"	--	(5)1/2"	62.0	25
SX115-40-1/2	1-1/2	15.5	(4)1/2"	--	(4)1/2"	92.0	25

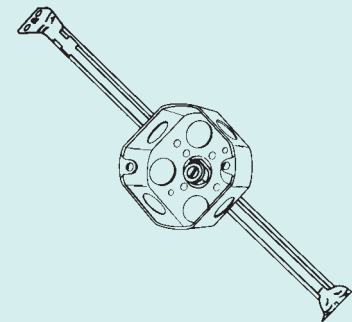

SX115-40-1/2
1-1/2" Deep
40-1/2 box on SX115 stud bar hanger
adjusts from 11-1/2" to 18-1/2"


3-1/2" Cover Hole Centerline.

OB/SB-1




4" Octagon Boxes


With Nonmetallic Sheathed Cable Clamps




561L
1-1/2" Deep




561N
1-1/2" Deep
Four nail holes each end

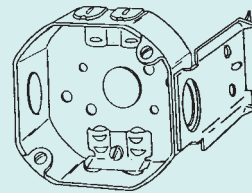


561LJB
1-1/2" Deep
JB bracket set flush,
Gauging notches 3/8" & 1/2"

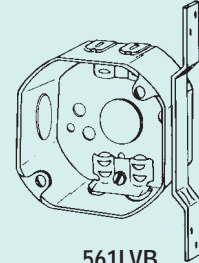


561LVB
1-1/2" Deep
Plain vertical bracket
set back 5/8"



561LXE
1-1/2" Deep
Plaster ears




561LD
2-1/8" Deep

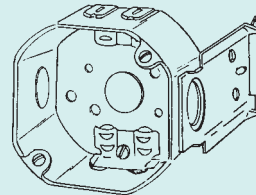


561LDJB
2-1/8" Deep
JB bracket set back 1"
Gauging notches
set back 1-3/8" & 1-1/2"

Catalog Number (Universal No.)	Depth (inches)	Wiring Cubic Inch Capacity	Type Clamp	Knockout Description			Wt. Lbs. Per 100	Std. Pkg.
				Sides	Ends	Bottom		
561L (54151)	1-1/2	15.5	CL-26	(2)1/2"	(4)21/32"	(1)1/2"	57.0	50
561N (54151N)	1-1/2	15.5	CL-26	(2)1/2"	(4)21/32"	(1)1/2"	57.0	50
561LJB (54151JN)	1-1/2	15.5	CL-26	(2)1/2"	(4)21/32"	(1)1/2"	74.0	25
561LVB (54151FN)	1-1/2	15.5	CL-26	(1)1/2"	(4)21/32"	(1)1/2"	66.0	25
561LXE (54151NE)	1-1/2	15.5	CL-26	(2)1/2"	(4)21/32"	(1)1/2"	62.0	50
561LD (54171N)	2-1/8	21.5	CL-26	(2)1/2"	(4)21/32"	(1)1/2"	70.0	25
561LDJB (54171JN)	2-1/8	21.5	CL-26	(2)1/2"	(4)21/32"	(1)1/2"	84.0	25
SX18-561L	1-1/2	15.5	CL-26	(2)1/2"	(4)21/32"	--	96.0	25
SX115-561L	1-1/2	15.5	CL-26	(2)1/2"	(4)21/32"	--	99.0	25

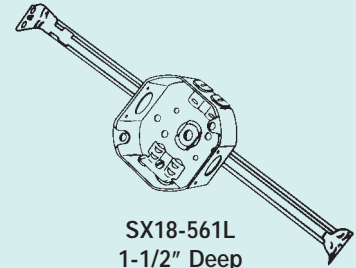

SX18-561L
1-1/2" Deep
561L box on SX18 clip bar
Hanger adjusts from 11-1/2" to 18-1/2"

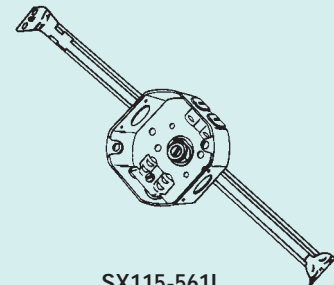

SX115-561L
1-1/2" Deep
561L box on SX115 stud bar
Hanger adjusts from 11-1/2" to 18-1/2"


3-1/2" Cover Hole Centerline.




OB/SB-1

4" Octagon Boxes


With Armored Cable Clamps



551L
1-1/2" Deep
Two nail holes each end




551LJB
1-1/2" Deep
JB bracket set flush,
Gauging Notches 3/8" & 1/2"

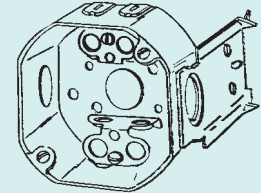

551LDJB
2-1/8" Deep
JB bracket set flush,
Gauging Notches 1-3/8" & 1-1/2"

Catalog Number (Universal No.)	Depth (inches)	Wiring Cubic Inch Capacity	Type Clamp	Knockout Description			Wt. Lbs. Per 100	Std. Pkg.
				Sides	Ends	Bottom		
551L (54151X)	1-1/2	15.5	CL-25	(2)1/2"	(4)21/32" (4)21/32"	(1)1/2"	61.0	50
551LJB	1-1/2	15.5	CL-25	(2)1/2"	(4)21/32" (4)21/32"	(1)1/2"	74.0	25
551LDJB	2-1/8	21.5	CL-25	(2)1/2"	(4)21/32" (4)21/32"	(1)1/2"	84.0	25
SX115-551L	1-1/2	15.5	CL-25	(2)1/2"	(4)21/32" (4)21/32"		103.0	25




SX115-551L
1-1/2" Deep
551L box on SX115 stud bar
Hanger adjusts from
11-1/2" to 18-1/2"


3-1/2" Cover Hole Centerline.

4" Octagon Box Extension Rings


With Conduit Knockouts



4OE-1/2
1-1/2" Deep



4OE-3/4
1-1/2" Deep



4OE-SPL
1-1/2" Deep

Catalog Number (Universal No.)	Depth (inches)	Wiring Cubic Inch Capacity	Type Clamp	Knockout Description			Wt. Lbs. Per 100	Std. Pkg.
				Sides	Ends	Bottom		
4OE-1/2 (55151-1/2)	1-1/2	15.5	--	(4)1/2"	--	--	37.0	50
4OE-3/4 (55151-3/4)	1-1/2	15.5	--	(4)3/4"	--	--	39.0	50
4OE-SPL (55151-SPL)	1-1/2	15.5	--	(2)1/2" (2)3/4"	--	--	39.0	50


3-1/2" Cover Hole Centerline.

OB/SB-1




4" Octagon and Round Covers

For 4" Octagon and Round Boxes



8409A
1/2" Raised



8409
5/8" Raised



8403



8413



8419LR



8420LR

Catalog Number (Universal No.)	Depth (inches)	Wiring Cubic In. Cap.	Description	Wt. Lbs. Per 100	Std. Pkg.
8409A (54C3-1/2)	1/2" Raised	3.5	Ears 2-3/4" C to C	18.0	50
8409 (54C3-3/4)	5/8" Raised	4.5	Ears 2-3/4" C to C	20.0	50
8403 (5401)	Flat	0.0	Blank	26.0	50
8413 (54C6)	Flat	0.0	1/2" Knockout	26.0	50
8419LR (54-S)	Flat	0.0	One Single Flush Receptacle 1-13/32" D	21.0	50
8420LR (54-D)	Flat	0.0	Duplex Receptacle	19.0	50

3-1/2" Cover Hole Centerline.

OB/SB-1