
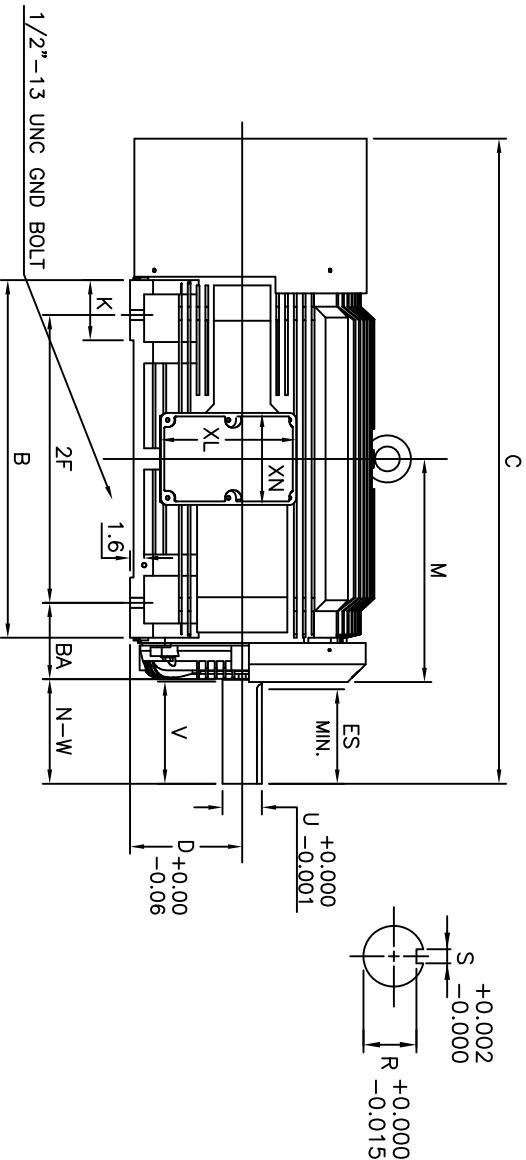
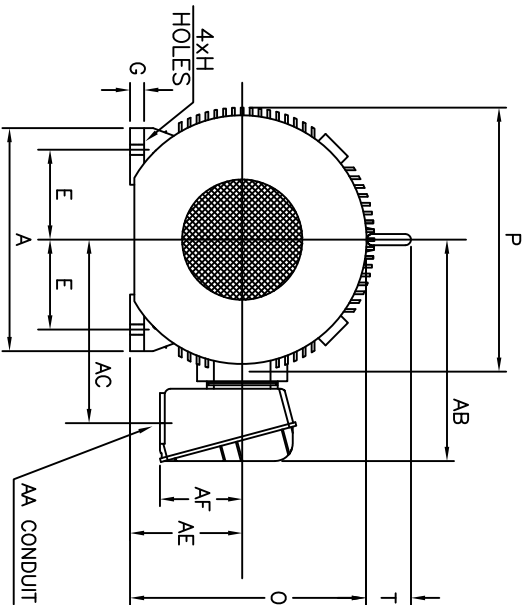




UNITS: INCHES

FRAME SIZE	MOTOR DIMENSIONS												CONDUIT BOX					
	A	B	C	D	G	J	K	M	O	P	T	AA(NPT)	AB	AC	AE	AF	XL	XN
5010USS	24.8	39.8	64.9	12.50	2.6	6.3	6.7	24.8	26.2	29.5	5.1	4.00	24.8	20.4	12.5	9.2	15.2	10.2
5010US	24.8	39.8	66.3	12.50	2.6	6.3	6.7	24.8	26.2	29.5	5.1	4.00	24.8	20.4	12.5	9.2	15.2	10.2
5010UZ	24.8	39.8	71.7	12.50	2.6	6.3	6.7	24.8	26.2	29.5	5.1	4.00	24.8	20.4	12.5	9.2	15.2	10.2
FRAME SIZE	MOUNTING				SHAFT EXTENSION				KEY SEAT				BEARINGS		MAXIMUM WEIGHT			
	E	2F	H	BA	N-W	V	U	R	S	ES	LS	OS						
5010USS	10.00	32.00	1.2	8.50	4.75	4.50	2.375	2.021	0.625	3.00	6313C3	NU313C3						
5010US	10.00	32.00	1.2	8.50	6.25	6.19	3.625	3.134	0.875	5.00	6320C3	6320C3	4650 lbs.					
5010UZ	10.00	32.00	1.2	8.50	11.62	11.38	4.375	3.817	1.000	10.00	NU324C3	6320C3						

CUSTOMER: _____ MOTOR MODEL NO.: _____ TAG NO's: _____

P.O. NO.: _____ HP: _____ VOLTAGE: _____ RPM(SYN.): _____ HZ: _____
FRAME SIZE: _____ PRODUCT TYPE: IIEFC EGP III 840 & 841
COMMENTS: _____

PER: _____ DATE: _____

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE ☒ PRELIMINARY
DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED ☐ CERTIFIED

TOSHIBA TOTALLY-ENCLOSED FAN-COOLED
HORIZONTAL FOOT-MOUNTED
3 PHASE INDUCTION MOTOR
F1 ASSEMBLY

XT SERIES
VISIT OUR WEBSITE AT:
www.toshiba.com/ind

- NOTES:
1. DIMENSION V REPRESENTS LENGTH OF STRAIGHT PART OF SHAFT
 2. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
 3. KEY DIMENSIONS EQUAL S x S x 10.00 FOR UZ, S x S x 5.00 FOR US, AND S x S x 3.00 FOR USS (MOTOR SUPPLIED WITH KEY)
 4. MOTOR WEIGHT SHOWN IS MAXIMUM HORSEPOWER IN FRAME
 5. STANDARD 4-8 POLE PRODUCT USES BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE
 6. STANDARD 2 POLE PRODUCT USES UNI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY FAN AND CONNECTION CHANGE

☒ STANDARD (NO AUX. BOXES)

☐ RTD AUX. BOX

☐ SPACE HEATER AUX. BOX

☐ BEARING RTD's

TYPICAL MOTOR PERFORMANCE DATA

Model: B4003FLG80MH

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
400	298	2	3585	5010USS	575	60	3	350
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	54	F	1.15	CONT	95.8	B	G	40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	400	298.3	350.0	96.0	89.2
¾ Load	300.00	223.7	263.5	96.0	87.9
½ Load	200.00	149.1	184.5	95.3	84.3
¼ Load	100.00	74.6	112.6	88.2	75.4
No Load			66.0		
Locked Rotor			2320.00		

Torque				Rotor wk² Inertia (lb-ft²)
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	
586	205	140	305	129.14

Safe Stall Time(s)		Sound Pressure dB(A) @ 1M	Bearings*		Approx. Motor Weight (lbs)
Cold	Hot		DE	NDE	
34	12	-	6313C3	NU313C3	

*Bearings are the only recommended spare part(s).

Motor Options:

Product Family:EQPIII

Mounting:Footed,Shaft:USS Shaft

Customer		
Customer PO		
Sales Order		
Project #		

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.


Engineering	garce	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0
Engr. Date	8/21/2015	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

SPEED TORQUE/CURRENT CURVE

Model: B4003FLG80MH

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
400	298	2	3585	5010USS	575	60	3	350
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	54	F	1.15	CONT	95.8	B	G	40 C
Locked Rotor Amps	Rotor wk ² Inertia (lb-ft ²)	Torque						
		Full Load (lb-ft)	Locked Rotor (%)	Pull Up (%)		Break Down (%)		
2320.00	129.14	586	205	140		305		

Design Values

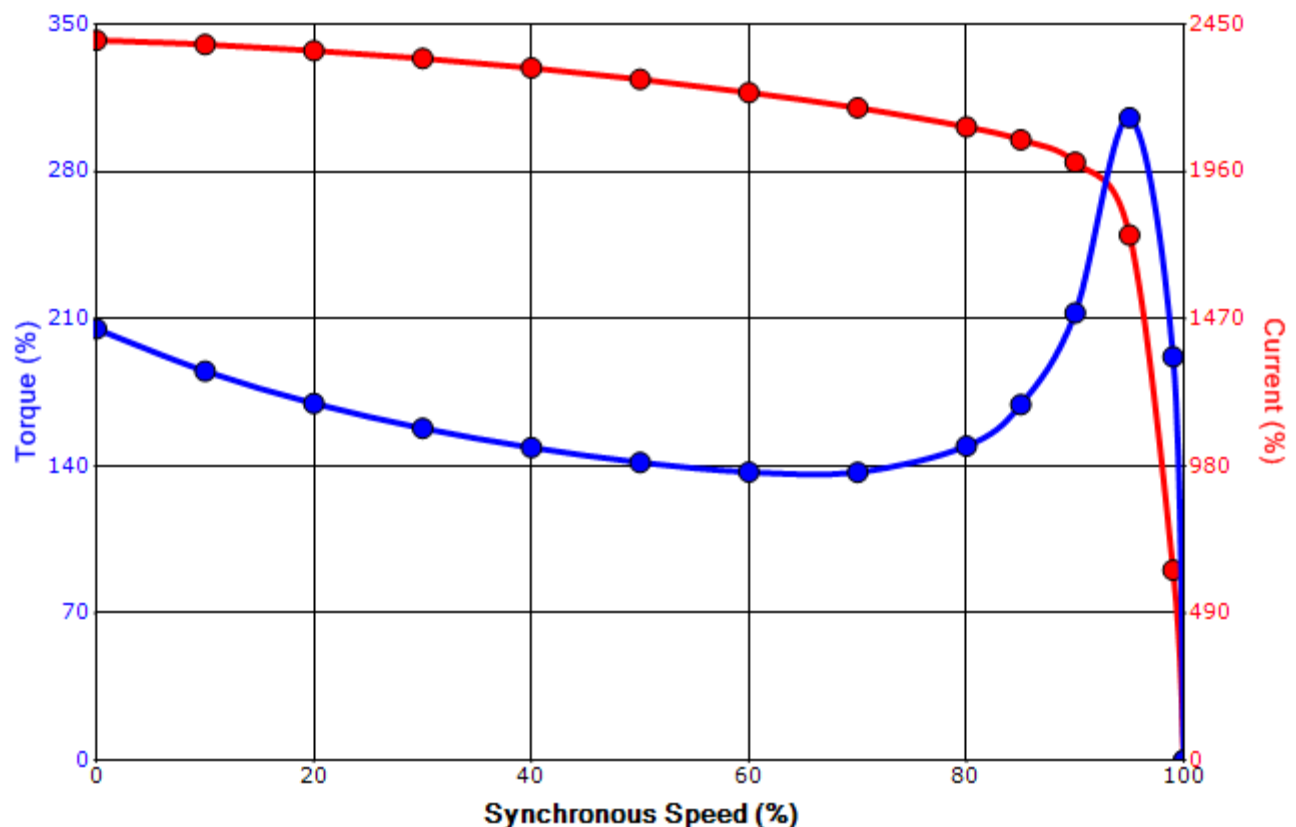

Customer		wk ² Load Inertia (lb-ft ²)	-
Customer PO		Load Type	-
Sales Order		Voltage (%)	100
Project #		Accel. Time	-

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering	garce	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0
Engr. Date	8/21/2015	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

Motor Connection Diagram

12 Leads

Single Voltage



Switch L1 and L2 to reverse rotation