

# Timber Lifting




**Tong shape has been designed** to provide a sure grip on poles and logs. *Painted bright orange for job site identification.*

Dixie Industries upset forges round alloy steel for optimum tensile strength and durability.

All Dixie lifting tongs are proof loaded to 2 times the working load limit then affixed with a permanent metal identification tag. Written certification is also supplied at time of shipment.

Lifting tongs are supported by either a screw pin shackle or nut & bolt safety shackle with a ring.

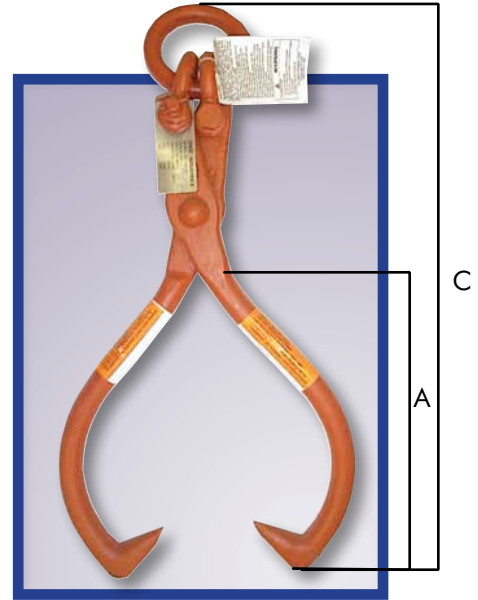

Item #	Material Dia. & Max. Opening	Close Ht. "A"	Overall Ht. "C"	Shackle Size	Ring Size	WLL at Degree of Opening						Approx. Weight
						75°		135°		180°		
						Jaw Open.	WLL (lbs)	Jaw Open.	WLL	Jaw Open.	WLL	
<b>40008</b>	<b>3/4" x 16"</b>	7"	18¾"	¾" N/B*	5/8" x 2¾"	3¾"	1,500	12"	1,000	16"	750	7.0 lbs.
<b>40218</b>	<b>1" x 20"</b>	9"	23¼"	½" N/B	3/4" x 3"	4"	2,500	17"	2,000	20"	1,500	16.5 lbs.
<b>40228</b>	<b>1" x 25"</b>	10"	25¼"	½" N/B	3/4" x 3"	4½"	2,500	20"	2,000	25"	1,500	17.0 lbs.
<b>40458</b>	<b>1¼" x 32"</b>	14"	31"	⅝" N/B	7/8" x 3¼"	7"	3,000	27"	2,500	32"	2,000	36.0 lbs.
<b>40558</b>	<b>1½" x 36"</b>	16"	37¾"	¾" N/B	1" x 4"	7½"	5,000	32"	4,000	36"	3,000	50.5 lbs.

**Warning:** Know your Working Load Limit—do not exceed it! The WLL decreases as you increase the size of the jaw opening. Do not heat tongs to sharpen points! Do not exceed maximum rated capacity.

\*NB= nut and bolt