

IP65

ELECTRONIC OUTSIDE MICROMETER




3101-25E



NEW SIZES!

- Resolution .00005"/0.001mm
(resolution of **3101-275E** and **3101-300E** is .0001"/0.001mm)
- IP65 dust/coolant proof
- Button functions: on/off, set, inch/mm, ABS/INC, data output
- Data output
- SR44 or LR44 battery, automatic power off
- Ratchet stop
- Carbide tips
- Supplied with spherical anvil
- Setting standards are included (except with 0-1"/0-25mm)
- Optional accessory: SPC cable (page 1-2)
- Supplied in fitted storage case

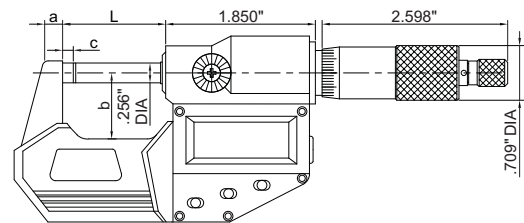

Order No.	EDP No.	Range	Accuracy	L	a	b	c
3101-25E	280838	0-1"/0-25mm	±.00008"	1.280"	.236"	.945"	.118"
3101-50E	280839	1-2"/25-50mm	±.00008"	2.264"	.315"	1.260"	.118"
3101-75E	280840	2-3"/50-75mm	±.00012"	3.248"	.315"	1.752"	.118"
3101-100E	280841	3-4"/75-100mm	±.00012"	4.232"	.315"	2.244"	.118"
3101-125E	280842	4-5"/100-125mm	±.00012"	5.236"	.394"	2.756"	.118"
3101-150E	280843	5-6"/125-150mm	±.00012"	6.240"	.394"	3.228"	.118"
3101-175E	280829	6-7"/150-175mm	±.00016"	7.244"	.472"	3.720"	.217"
3101-200E	280830	7-8"/175-200mm	±.00016"	8.248"	.472"	4.213"	.217"
3101-225E	280846	8-9"/200-225mm	±.00016"	9.213"	.764"	5.098"	.217"
3101-250E	280847	9-10"/225-250mm	±.00016"	10.217"	.764"	5.610"	.217"
3101-275E	280848	10-11"/250-275mm	±.0002"	11.220"	.764"	6.102"	.217"
3101-300E	280849	11-12"/275-300mm	±.0002"	12.224"	.764"	6.594"	.217"

Micrometer sets

Order No.	EDP No.	Range	Micrometers Included
3101-44E	285125	0-4"/0-100mm	3101-25E, 3101-50E, 3101-75E, 3101-100E
3101-66E	285126	0-6"/0-150mm	3101-25E, 3101-50E, 3101-75E, 3101-100E, 3101-125E, 3101-150E